



Maxx Cold X-series | The Legacy Companies
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331
 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401
 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

Project Name: _____
 Location: _____
 Item #: _____ Qty: _____
 Model: _____

UNDERCOUNTER REFRIGERATORS

Model: MXCR27U MXCR48U MXCR60U MXCR72U

International Model:
 Add -50 (220V/50Hz/1Ph)



MXCR27U



MXCR48U



MXCR60U



MXCR72U

Maxx Cold Undercounter Refrigerators are designed for performance. These undercounter refrigerators make the most of available space and provide excellent service. The stainless steel exterior provides durability and ensures years of reliable service.

FEATURES

- Easy to grip recessed drawer handles
- 3" casters are standard
- Adjustable shelves (one per section/door)
- Available in multiple sizes to suit your needs
- Available in 120V/60Hz, 220V/50Hz & 220V/60Hz

TEMPERATURE

- Holding temperature: 34° to 40°F (2° to 5°C)
- Utilizes environmentally friendly refrigerant R134A
- Forced-air refrigeration
- Efficient cooling system (two or more fans)
- Automatic defrost system

CONSTRUCTION

- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Painted Aluminum
- Urethane insulated walls and doors
- Heavy duty epoxy coated shelves


REFRIGERANT

Environmentally-friendly R-134A propane

ELECTRIC

120/60Hz/1 Ph (NEMA 5-15)
 Cord set includes plug & 9.8' (3m) cord
 220V/50Hz & 220V/60Hz available as options

1.27" / 32 mm



NEMA 5-15P



Certified to
 ANSI-NSF 7



Certified to
 ANSI UL 471



DOE 2017
 Compliant

Maxx Cold X-Series WARRANTY (USA / CANADA)

One (1) year parts
 One (1) year on-site labor
 Four additional (4) years compressor (part only)
 Administered by The Legacy Companies, 877.368.2797
 24/7 tech support provided


Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.


5/25/17 12:10

UNDERCOUNTER REFRIGERATORS



MXCR27U






MXCR48U



MXCR60U



MXCR72U

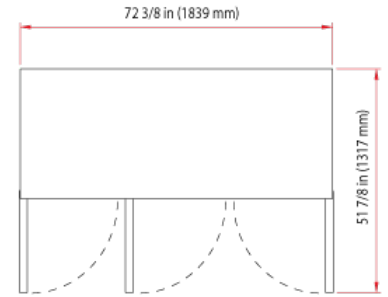

	Dimensions in / mm	Capacity	Temperature Range	Voltage	Amps	Shelves	Unit Weight
MXCR27U	27.5 x 30 x 35.5 699 x 762 x 902	6.5 Cu Ft 184 L	34° to 40°F 2° to 5° C	120V/60Hz 220V/50-60Hz	5	1	243lb 110 kg
MXCR48U	48.3125 x 30 x 35.5 1227 x 762 x 902	12 Cu Ft 340 L	34° to 40°F 2° to 5° C	120V/60Hz 220V/50-60Hz	5	2	300 lb 136 kg
MXCR60U	60.375 x 30 x 35.5 1533 x 762 x 902	15.5 Cu Ft 439 L	34° to 40°F 2° to 5° C	120V/60Hz 220V/50-60Hz	5	2	348 lb 158 kg
MXCR72U	72.375 x 30 x 35.5 1839 x 762 x 902	18 Cu Ft 510 L	34° to 40°F 2° to 5° C	120V/60Hz 220V/50-60Hz	7	3	353 lb 172 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.
 While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.
 By using the information provided, the user assumes all risks in connection with such use.