



Atlas Metal

INDUSTRIES, INC.

A subsidiary of Mercury Aircraft, Inc.

1135 N.W. 159th DRIVE, MIAMI, FLORIDA 33169

TEL: (305) 625-2451 TOLL FREE (800) 762-7565 FAX: (305) 623-0475

Web Page: www.atlasfoodserv.com E-Mail: sales@atlasfoodserv.com

Project: _____

Item No.: _____

Quantity: _____

DROP-IN SERVING EQUIPMENT



FROST TOP

Refrigerated,
Self-Contained

WF-2

WF-3

WF-4

WF-5

WF-6

SPECIFICATIONS

TOP: Constructed of 14 gauge, type 304 stainless steel, die stamped with a raised perimeter bead. There shall be a solid vinyl gasket under the beaded edge to form a seal to the counter top, thus preventing seepage or marring of the counter top.

FROST TOP: Constructed of 14 gauge, type 304 stainless steel, one piece construction, all welded, ground and polished to a uniform finish. The top is formed to stand 1" above the counter top and is provided with a 1/2" full perimeter gutter to collect condensation; a 1" I.P.S. drain is provided. The frost top has copper tubing firmly soldered to the exterior bottom.

INSULATION: The pan is fully insulated with high density fiberglass and polystyrene, 1-1/2" thick, and enclosed with an 18 gauge galvanized steel outer case.

REFRIGERATION SYSTEM: The compressor housing shall be fabricated from 14 gauge galvanized steel and bolted to the base of the unit. A fully self-contained condensing unit is provided with a hermetically sealed compressor. The system is fully charged with CFC free refrigerant and ready to operate.

NOTE: Proper ventilation must be provided in counter.

ELECTRICAL: The unit will be wired for 15 amps., 120 volt, single phase operation with an on/off switch and pilot light. A 6' long 3-wire cord and plug (NEMA 5-15P) will be provided.

Specifications subject to change without notice.

STANDARD FEATURES


- "Quick" frost top, stands 1" above counter for attractive display - ideal for pre-plated cold food
- Fully insulated for maximum efficiency and energy savings
- Factory applied gasket - makes installation a snap and seals units to the counter top, thus eliminating seepage
- 1-Year Parts & Labor Warranty
- NSF Certified and UL Listed

ACCESSORIES

- **5YW** - 5-Year Compressor Warranty
- **WFFT** - Flush recessed top for frost top units
- **RS** - Remote on/off switch for counter mounting
- **RDVE** - Rear Drain Valve Extension
- * **220 Volt - 50 Cycle** Compressor

*Please see Operation & Installation Manual for ALL operation and maintenance details.

* Units with these accessories are not currently UL listed.

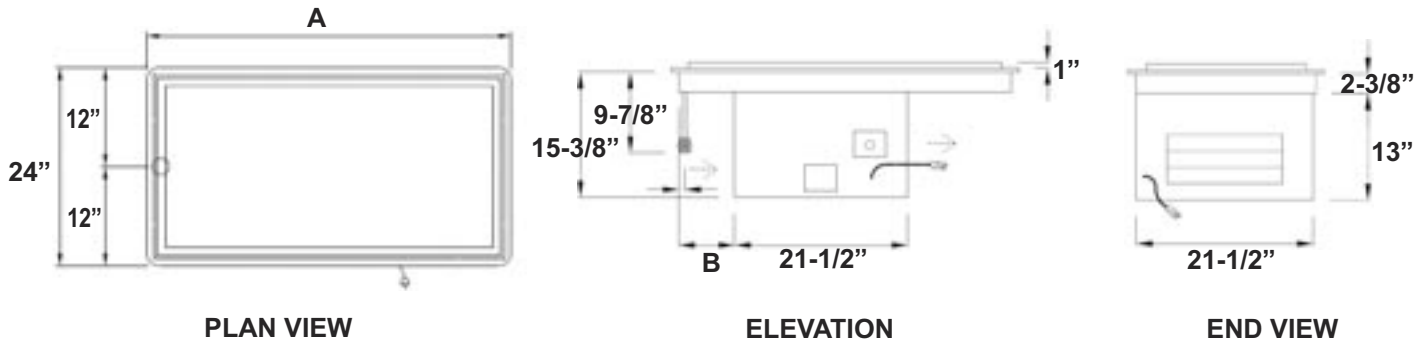

MODEL	"A"	"B"	FROST TOP SIZE	ELECTRICAL CHARACTERISTICS	CUT-OUT REQUIRED	SHIP WT. (LBS.)
WF-2	29-3/4" (75.5cm)	6" (15.2cm)	19-1/2" X 25-1/4" (49.5 X 64.1cm)	3.9amps. - 120V - 1/5HP	22-1/4" X 28" (56.5 X 71.1cm)	171 (77.6kg)
WF-3	43-1/2" (110.4cm)	7" (17.7cm)	19-1/2" X 39" (49.5 X 99cm)	6.8amps. - 120V - 1/4HP	22-1/4" X 41-3/4" (56.5 X 106cm)	207 (93.9kg)
WF-4	57-1/4" (145.4cm)	7" (17.7cm)	19-1/2" X 52-3/4" (49.5 X 133.9cm)	9.8amps. - 120V - 1/3HP	22-1/4" X 55-1/2" (56.5 X 140.9cm)	236 (107kg)
WF-5	71" (180.3cm)	7" (17.7cm)	19-1/2" X 66-1/2" (49.5 X 168.9cm)	9.8amps. - 120V - 1/3HP	22-1/4" X 69-1/4" (56.5 X 175.8cm)	263 (119.3kg)
WF-6	84-3/4" (215.2cm)	7" (17.7cm)	19-1/2" X 80-1/4" (49.5 X 203.8cm)	10.7amps. - 120V - 1/2HP	22-1/4" X 83" (56.5 X 210.8cm)	328 (148.8kg)

REFRIGERATION CHART						
MODEL	HP	REF.	OZ.	LOW PSIG.	HIGH PSIG.	BTU M10 90A
WF-2	1/5	134A	6	8	150	505
WF-3	1/4	134A	8	8	155	1070
WF-4	1/3	134A	10	8	155	1285
WF-5	1/3	134A	12	8	155	1285
WF-6	1/2	134A	16	8	160	2140

MODEL	WT. LESS COMP. (LBS.)
WFX-2	130 (59kg)
WFX-3	160 (72.6kg)
WFX-4	190 (86.2kg)
WFX-5	217 (98.4kg)
WFX-6	252 (114.3kg)

WFX - REFRIGERATED FROST TOP WITHOUT COMPRESSOR

Units include Refrigerated Frost Top, Cap Tube & Drier (for hook up in field by others)

COMPRESSORS FOR REMOTE INSTALLATIONS

2029 - 1/5 HP for WFX-2
2029-1 - 1/4 HP for WFX-3
2029-2 - 1/3 HP for WFX-4
1800-4214 - 1/2 HP for WFX-5 & 6