


Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

## P SERIES TOP MOUNT EXTRA TALL ROLL-IN FREEZER PFI1XTHC-1AS Solid Door Freezer

#### MODEL: **PFI1XTHC-1AS**





7 Year Parts/Labor Warranty 7 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Stainless steel front and side exterior (galvanized rear, back & bottom)
- · Interior liner is made of corrosion resistant aluminum
- Stainless steel door liner
- · Full electronic control
- Expansion valve technology

- · Self-closing door with 120° stay-open feature
- 22 Gauge stainless steel door
- LED interior light
- Heavy-duty cylinder locks
- Snap-in magnetic gaskets for positive door seal
- Hinged front shroud
- Reinforced stainless steel door ramps outside and cart guides inside
- Accepts carts up to 26 3/8"(W) x 26"(D) x 72 1/2"(H) (cart not included)
- · Wiper gasket at bottom of door seals door to ramp
- Energy saving thermal breaker
- Stainless steel breaker caps
- 8' Cord and plug (see electrical data for details)

## **OPTIONS & ACCESSORIES**

- · Stainless steel interior
- · Stainless steel back
- Door swing orientation (at time of order)

## **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil, located out of the food zone
- Freezer capable of maintaining product temperature down to -10°F





3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




# **BEVERAGE-AIR**

MODEL	PFI1XTHC-1AS	
EXTERNAL DIMENSIONAL DATA		
Width Overall	36 ½"	
Depth Overall with Handle	36 1⁄8"	
Height Overall	89 7⁄s"	
Between Cart Guides	26 ¾"	
Number of Doors	1	
Depth with Door Open 90°	65 ¾"	
Door Openings (in)	27 <sup>7</sup> /s" x 72 <sup>1</sup> /s"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	38.06	
Internal Width Overall (in)	31 ¼"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	72"	
ELECTRICAL DATA		
Full Load Amperes 115/60/1*	9.1	
REFRIGERATION DATA		
Horsepower	3/4	
Capacity (BTU/Hr)	2580	
Heat Rejection (BTU/Hr)	3870	
Charge (lbs/grams/ounces)	0.2866 / 130 / 4.6	
SHIPPING DATA		
Gross Weight - Crated	450 lbs	
Height - Crated	96"	
Width - Crated	43"	
Depth - Crated	37"	

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances  $+/-1/4^{\circ}$ . Metric dimensions (MM).

#### P Series Top Mount Roll-In Extra Tall Freezer Model: PFI1XTHC-1AS

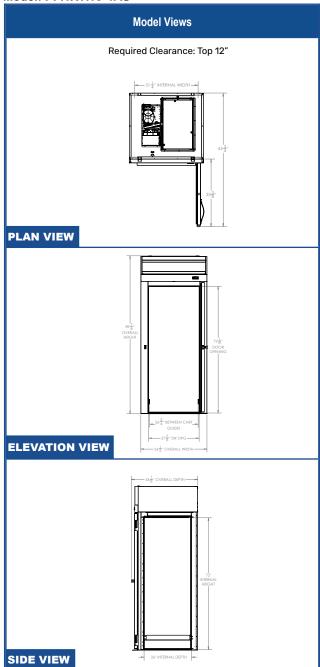

#### ELECTRICAL CONNECTION



115/60/1\*Unit pre-wired at factoryNEMA 5-15Pand include 8' long cordand plug set.

\* NOTE: Units that utilize variable speed compressor technology can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage-Air recommends using either an Eaton, SCF20, or HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

