

## DROP-IN PLATE DISPENSER



**Item Numbers**  
**DROP-IN HEATED SHIELDED**

- DXIDPHD0912
- DXIDPHD1012
- DXIDPHD1200

**DROP-IN UNHEATED SHIELDED**

- DXIDPDS0912
- DXIDPDS1012
- DXIDPDS1200

### Application

These self-leveling drop-in plate dispensers are offered in two styles; unheated shielded base, and heated shielded base.

### Construction

Unit shall be of welded stainless steel construction. Dispensers shall hang from surface opening by an 16-gauge flange ring and three each 22-gauge vertical side supports welded to 20-gauge bottom plate. Self-leveling dish carriage shall be welded stainless steel construction and shall travel vertically in dispenser tube with nylon guides for smooth operation. Carriage shall have 22-gauge removable dish platform. Unit shall feature flange mounted perimeter extension springs, which are detachable to provide adjustment without use of tools.



### Heated Models

Units shall be 120 volt 60 Hz and shall have 5' power supply cord with 5-15P NEMA plug. Heating system shall feature thermostatic control in a tamper protective location with safe high-end shut-off. Thermostat shall be field adjustable between 130 to 170 degrees. On/off switch and power indicator light shall be mounted on top flange of dispenser.

### Warranty

One years parts and labor.

# DROP-IN PLATE DISPENSER

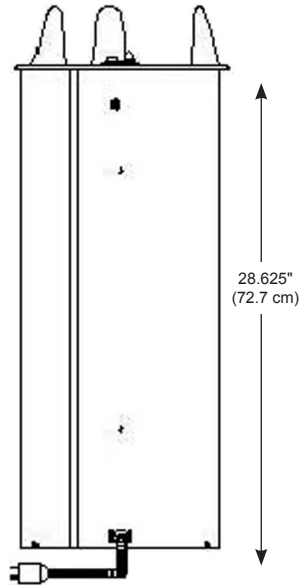

## Items and Dimensions

| ITEM NUMBER | MODEL NUMBER | DIAMETER             | HEIGHT               | CUT OUT DIAMETER      | MAX PLATE SIZE      | ELECTRICAL SPECIFICATIONS |      | SHIP WEIGHT        | SHIP CUBE |
|-------------|--------------|----------------------|----------------------|-----------------------|---------------------|---------------------------|------|--------------------|-----------|
|             |              |                      |                      |                       |                     | WATT                      | AMPS |                    |           |
| DXIDPDS0912 | IDPDS0910    | 12.375"<br>(31.4 cm) | 28.625"<br>(72.7 cm) | 11.5625"<br>(29.4 cm) | 9.125"<br>(23.2cm)  | -                         | -    | 24 lb<br>(11.0 kg) | 2.8       |
| DXIDPDS1012 | IDPDS1012    | 13.375"<br>(34.0 cm) | 28.625"<br>(72.7 cm) | 12.5625"<br>(31.9 cm) | 10.125"<br>(25.7cm) | -                         | -    | 26 lb<br>(11.8 kg) | 3.4       |
| DXIDPDS1200 | IDPDS1200    | 15.875"<br>(40.3 cm) | 28.625"<br>(72.7 cm) | 14.3125"<br>(36.4 cm) | 12.25"<br>(31.1cm)  | -                         | -    | 27 lb<br>(12.3 kg) | 4.7       |
| DXIDPHD0912 | IDPHD0912    | 12.375"<br>(31.4 cm) | 28.625"<br>(72.7 cm) | 11.5625"<br>(29.4 cm) | 9.125"<br>(23.2cm)  | 300                       | 2.5  | 28 lb<br>(12.7 kg) | 2.8       |
| DXIDPHD1012 | IDPHD1012    | 13.375"<br>(34.0 cm) | 28.625"<br>(72.7 cm) | 12.5625"<br>(31.9 cm) | 10.125"<br>(25.7cm) | 500                       | 4.2  | 30 lb<br>(13.6 kg) | 3.4       |
| DXIDPHD1200 | IDPHD1200    | 15.875"<br>(40.3 cm) | 28.625"<br>(72.7 cm) | 14.3125"<br>(36.4 cm) | 12.25"<br>(31.1cm)  | 500                       | 4.2  | 31 lb<br>(14.0 kg) | 4.7       |



Please confirm that you have the most current specification sheet by visiting [www.dinex.com](http://www.dinex.com).  
Dinex® reserves the right to change specifications and product design without notice.  
Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Printed in USA



4711 E. Hefner Road  
Oklahoma City, OK 73131  
800.654.8210 Fax: 405.475.5607  
[www.dinex.com](http://www.dinex.com)

DropInPlateDispenser\_SpecSheet