


# SURFACE MOUNT SERIES 5" X 45"

- Add European style while creating dispense excitement.
- Condition the glass before pouring invert glass, push down on sprayer for cold water rinsing.
- Robust 18 gauge stainless steel construction.
- Welded corners, finished smooth for safety and appearance.

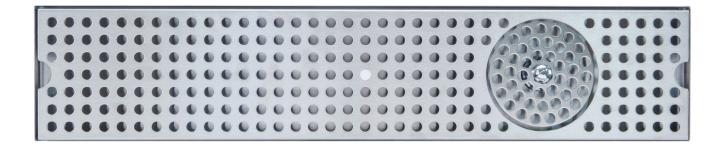

**DP-120D-45GR** 

**Brushed Stainless Steel** 



www.micromatic.com • 1 (866) 327-4159

5" WIDTH TRAY WITH GLASS RINSER

Job Number: Location:






### Rinser Water Inlet Installation

- · Always check local plumbing codes first.
- Install in-line water regulator set at 15 PSI from the street water supply.
- Install a shutoff on the rinser water supply.

NOTE: It is recommended a licensed plumber connect the glass rinser to the water supply line. Always use an in-line shut-off and water pressure regulator. Micro Matic shall not be held liable for damage caused by improper installation.

## **Dimensions**

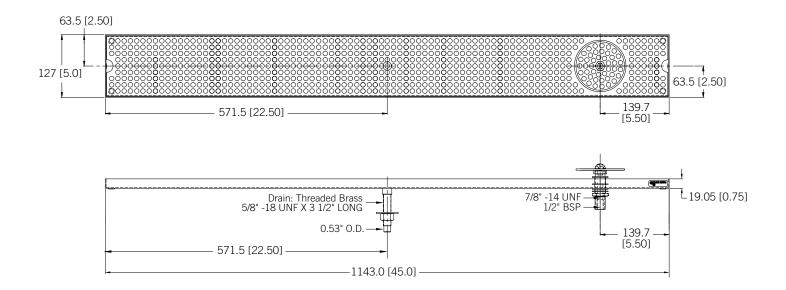



#### Central

10726 North Second St. Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363

#### Southeast

15111 Dispense Ln. Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429

#### **Northeast**

4601 Saucon Creek Rd. Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466