



Job: \_\_\_\_\_ Item No.: \_\_\_\_\_  
 Notes: \_\_\_\_\_  
 Model Number:  PH1815  PH1835

## Heated Transport Carts

## SPECIFICATIONS



PH1835

### DESCRIPTION

PH Series Heated Food Transport Cabinets are designed to hold and transport cooked food warm and ready for serving. They are constructed of sanitary stainless steel and feature a bottom-mounted lift-out heating system with dial controls and blower heat for even air flow throughout the cabinet. Transport features include wrap-around bumper, wheel-ahead caster pattern and insulated turned-in seam construction.

### SHORT FORM SPECIFICATIONS

Heated food transport cart, electric, insulated, welded, turned-in seam stainless steel construction with side-mounted push handles and flush-mounted transport latch with finger grip. Lift-off, top-mounted, convection heater. Stainless steel tray racks with universal adjustable tray slides on 1.75" centers. Standard 3.5" spacing for 18"x26" sheet pans and 12"x20" steam table pans. Non-marking gray vinyl wrap-around bumper. Polyurethane casters set in wheel-ahead caster pattern. 120V, 60Hz, 1Ph, 1500 watts, 13A, ten-foot 3 wire rubber cord with 3-prong grounding plug. NEMA 5-15P.

### FEATURES

- Top mounted, 1500 watt, removable convection heating system
- Dial thermometer with remote sensing bulb
- Capable of heating to 200°F (93°C); pre-heat to 160°F (71°C) in approximately 25 minutes
- All welded, turned-in seam, stainless steel construction
- 14 ga. stainless steel caster bolsters; 1"x1"x14 ga. perimeter tube supports welded to bolsters
- Two heavy-duty aluminum vertical push handles bolted to sides with reinforced back-up plates
- Double panel door with 1" thick high-density fiberglass insulation
- Adjustable edge-mounted hinges with chrome plated finish
- Heavy-duty edge-mounted latch
- Heavy-duty vinyl door gasket
- All-swivel polyurethane casters; two fitted with brakes
- Offset wheel-ahead caster pattern
- Non-marking gray vinyl bumper set in heavy-duty extruded aluminum frame
- Removable tray racks with adjustable tray slides on 1.75" centers; 3.5" standard spacing
- Accommodates 18"x26" sheet pans, 12"x20" steam table pans, GN 1/1 and GN 2/1 pans and 20"x20" glass racks

### OPTIONS AND ACCESSORIES

- Menu card holder
- Polycarbonate thermometer cover
- Side-mounted transport latch
- Locking door latch
- Rack hold down device
- Heater hold down device
- Tamper-resistant fasteners
- PH1835 only: pass-through, Dutch doors, Pass-through Dutch doors (Dutch on front, full solid on back)
- Alternate electrical configuration
- Alternate caster sizes and types
- Close-fit bumper
- Marine package
- Correctional package

### CERTIFICATIONS



### WARRANTY

One-year warranty for parts and labor.



**CARTER-HOFFMANN**  
 1551 McCormick Avenue, Mundelein, IL 60060  
 847.362.5500 • 800.323.9793  
 www.carter-hoffmann.com

Follow us



Form  
 PH18T Series\_0821






Job:                   Item No.:  
 Notes:  
 Model Number:  PH1815    PH1835

## Heated Transport Carts

## SPECIFICATIONS

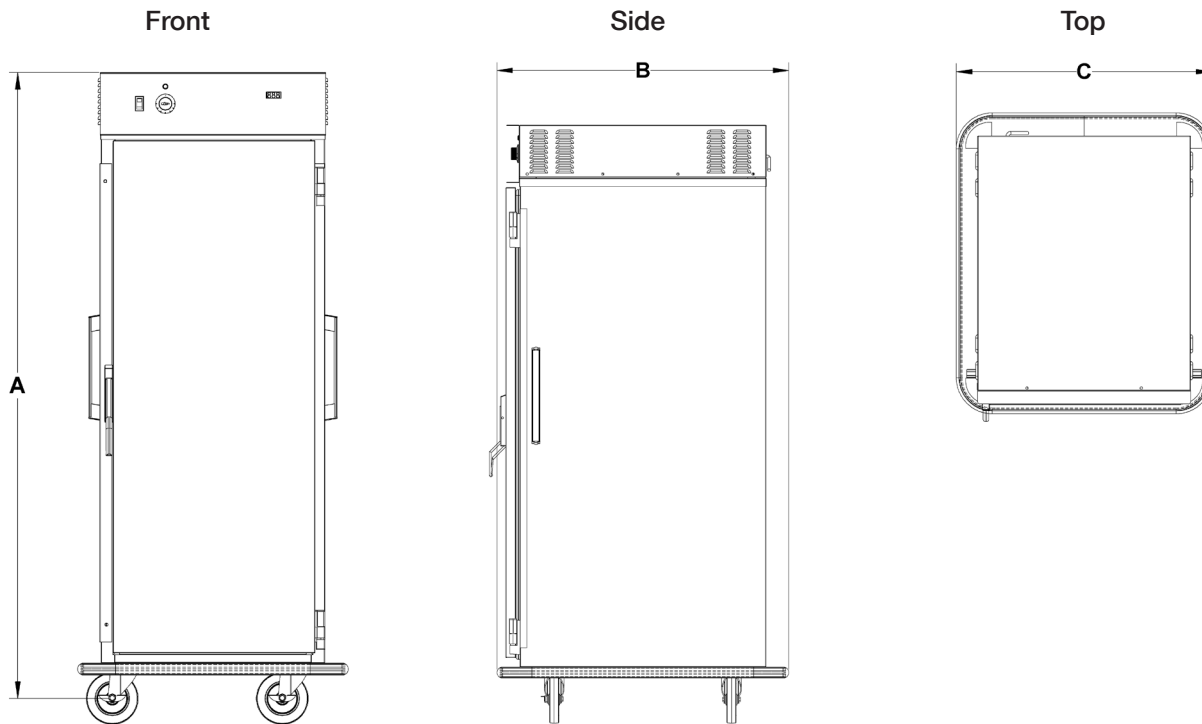

### CLEARANCES

A clearance of at least 2" from any wall or combustible material. A clearance of least 36" at the front of the cabinet is required to open the door. Cabinet must be placed on a solid level floor.

### ELECTRICAL DATA

Single electrical connection.  
 120 Volts, 1500 Watts, 13 Amps, 60Hz, single phase.  
 Ten foot three wire rubber cord with 3-prong grounding plug. NEMA 5-15P.



Model Number	Pan Capacity*		Inside Working Height		Height [A]		Depth [B]		Width [C]		Caster Diameter		Shipping weight	
	18"x26"	12"x20"	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
PH1815	12	24	45 <sup>3/4</sup>	1162	61 <sup>1/2</sup>	1562	38	965	31 <sup>1/2</sup>	800	6	152	452	193
PH1835	15	30	57 <sup>1/2</sup>	1461	75 <sup>1/4</sup>	918	38	965	31 <sup>1/2</sup>	800	5	127	532	241

\*Pan spacing at 3.5" (89mm). Tray slides adjustable at 1.75" increments.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.