ICB Twin SH PE, 120/240V SST W/Wireless

Height: 32.8" Width: 21.9" Depth: 23.0" Produce fresh cold brew in minutes with the new Cold Brew mode, enabling operators to brew an on-demand batch of concentrate or ready-to-drink cold brew quickly and consistently with operational ease

- Add Bubble Tea to the menu with the new Bubble Tea Kit (54165.1018)
- 4.3" Color Touchscreen aids in customizing recipes, brewing options and control
- The QWERTY key pad feature allows for easy customization of recipe names in English, Spanish and French
- · SmartWAVE sprayhead technology provides enhanced uniformity of extraction and lime scale reduction
- ENERGY STAR® certified
- ICB Twin SH 53600.0100 is compatible with new Infusion SH servers and the new TF 1.5-gallon ThermoFresh® Servers
- Customers can easily add up to 10 screensaver images to advertise and promote their brand and products
- Wireless Server monitoring
- Fast flow hot water faucet
- Stainless steel brew baskets provide durability and ease of cleaning
- · Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- Optional BUNNlink® remote monitoring support (kit required) Agency:





Additional Features

Funnel: Black Plastic Faucet: Side

Legs: 4" Stainless Steel Legs

Electrical & Capacity

Server(s) sold separately

Specifications

Product #: 53600.0100

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

(83.3cm)

(55.6cm)

(58.4cm)

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120/240	25	6000	Yes/	-	280	60°F (15.5°C)	1	3	60
*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.									

Plumbing Requirements

CAD Drawings

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	3/8" Male Flare Fitting	1.00	•		


WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle



Last Updated: 04/07/2023

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

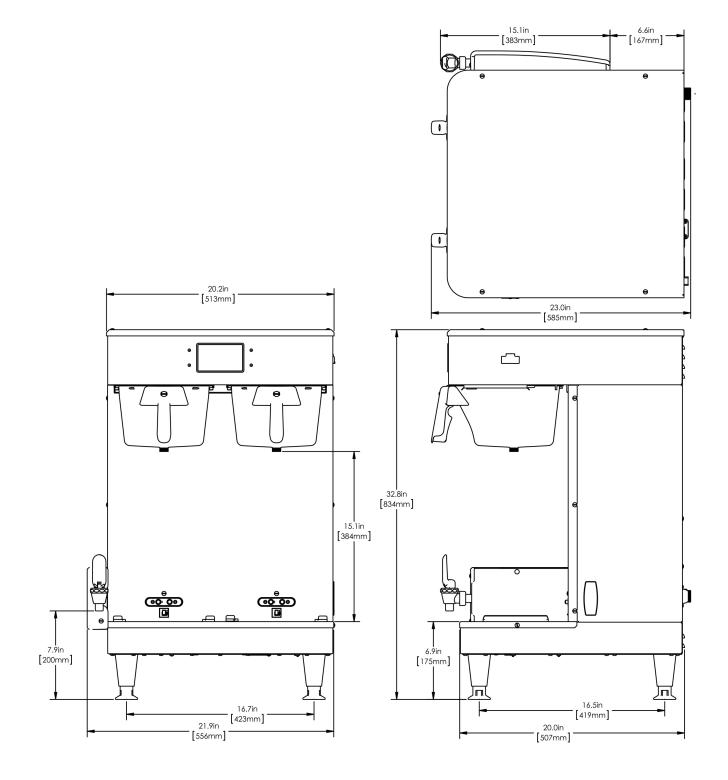

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	32.8 in.	21.9 in.	23.0 in.	37.5 in.	26.1 in.	28.4 in.	104.350 lbs	16.087 ft ³	
Metric	83.3 cm	55.6 cm	58.4 cm	95.3 cm	66.4 cm	72.1 cm	47.333 kgs	0.456 m³	



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last U

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 04/07

 For most current specifications and other info visit bunn.com.
 04/07

Last Updated: 04/07/2023

Related Products & Accessories: ICB Twin SH PE, 120/240V SST W/Wireless (53600.0100)







BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last Updated: the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

04/07/2023

Serving & Holding Options: ICB Twin SH PE, 120/240V SST W/Wireless(53600.0100)





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last Updated: the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. 04/07/2023
For most current specifications and other info visit bunn.com.