

COMMERCIAL

Refrigeration Equipment 2-Door Refrigerator Under Counter 48" Long



738264 (KCHUC48R)

2-Door Refrigerator Under Counter 48" Long

Short Form Specification

<u>ltem No.</u>

2-door refrigerator counter top, 35.5 inches tall, with exterior back panel, exterior

bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. External temperature display.

R600a gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

<u>ITEM #</u>	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- CFC and HCFC free (ecological refrigerant type: R600a).

Optional Accessories

- 1 ADJUSTABLE FOOT
- Drawer Kit for 48" Mega Top, Salad PNC 880616 Top, Undercounter and L/R section of 70" Salad & Mega Top and 72" Undercounter

PNC 206445


APPROVAL:

Part of

Kelvinator Commercial www.kelvinatorcommercial.com



Refrigeration Equipment 2-Door Refrigerator Under Counter 48" Long

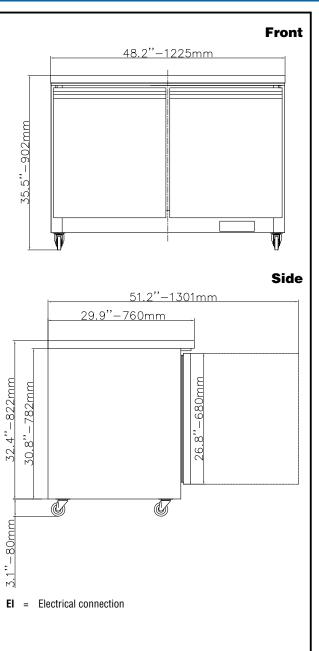

Electric

Supply voltage:	
738264 (KCHUC48R)	115 V/1 ph/60 Hz
Electrical power, max:	0.31 kW
Plug type:	USA NEMA 5-15P
Capacity:	
Gross capacity:	12 cu.feet
Key Information:	
Door hinges:	1 Left+1 Right
External dimensions, Width:	48 1/4" (1225 mm)
External dimensions, Depth:	29 15/16" (760 mm)
External dimensions, Height:	35 1/2" (902 mm)
Number and type of doors:	2 Full
Internal Dimensions (depth):	22 13/16" / (580 mm)
Internal Dimensions (height):	23 1/2" / (597 mm)
Internal Dimensions (width):	42 1/2" / (1080 mm)
Shipping height:	38 3/16" (970 mm)
Shipping weight:	238 lbs (108 kg)
Shipping volume:	34.66 ft ³ (0.98 m ³)
Number and type of grids (included):	2 - Vinyl-Coated Steel
Type of external material:	Stainless Steel
Type of internal material:	Polystyrene
Warranty:	3 / 5 years
Approvals	ENERGY STAR;ETL C&USETL SANITATION

Approvals

Refrigeration Data

Current absorbed:	3 Amps
Compressor power:	1/8 hp
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost
Suctainability	

Sustainability

Refrigerant type:	R600a
GWP Index:	3
Refrigerant weight:	75 g



Refrigeration Equipment 2-Door Refrigerator Under Counter 48" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.