

## Cuisine Series Heavy Duty Broiler W/Adjustable Racks

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

### Models

- C36-ABR
- C36-ABC
- C24-ABS
- C36-ABS
- C36-ARR
- C36-ARC
- C24-ARS
- C36-ARS



Model C36-ABR  
 Range with 36" Broiler  
 with Adjustable Racks

### Standard Features

- Stainless steel front and sides
- 7" (178mm) high stainless steel stub back
- Stainless steel front rail
- Stainless steel burner box
- Individual burner controls
- 1 1/4" NPT front gas manifold
- 6" (152mm) Stainless Steel adjustable legs
- Can be installed individually or in a battery except the oven based models C36-ABR/C and C36-ARR/C, which can only be connected with other C36-ABR/C or C36-ARR/C broilers
- Briquettes (B) or cast iron radiants (R)
- Tilting adjustable grates (A)
- Extra large grease container
- Porcelain oven interior
- R model - 4 rack positions  
 C model - 3 rack positions
- R model - 1 chrome plated racks  
 C model - 3 chrome plated racks
- Fully insulated oven interior
- Safety oven pilot
- Oven thermostat control: 150°- 500°F (66°-260°C)
- Range base convection oven (C) c/w NEMA 5-15P cord & plug, 1/3 hp motor, 120V 60Hz, 0.6A

### Options & Accessories

- Stainless steel back
- Stainless steel oven interior in lieu of porcelain oven interior - NC
- Extra oven rack
- Single or double deck height back riser
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door(s) for cabinet base units
- Gas shut-off valves - 3/4", 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4", 1", 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect 3/4", 1", 1 1/4" (Specify)
- Rear gas connection: 3/4" NPT (max 200,000 BTU's)
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane non - marking swivel casters w/front brakes
- Set of (4) 6" swivel casters, w/front brakes
- Extension for 1/9 pans

### Specifications

Garland Cuisine Series Range Match Char-Broiler, Model \_\_\_\_\_ with total BTU/h rating of \_\_\_\_\_ when used with natural/propane gas. Stainless steel front and sides and 6" (152mm) stainless steel legs with adjustable feet.

**Ovens** - One piece oven door. Porcelain oven interior with a heavy-duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°-260°C).

**Broilers** - Radiant broilers have an 18K BTU individual burner rating. 24" and 36" offerings with adjustable grates. Briquette broilers have a 45K BTU burner rating. 24" and 36" offerings with adjustable grates.


NOTE: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.



Cuisine Series Heavy Duty Broiler W/Adjustable Racks

## Cuisine Series Heavy Duty Broiler w/Adjustable Racks

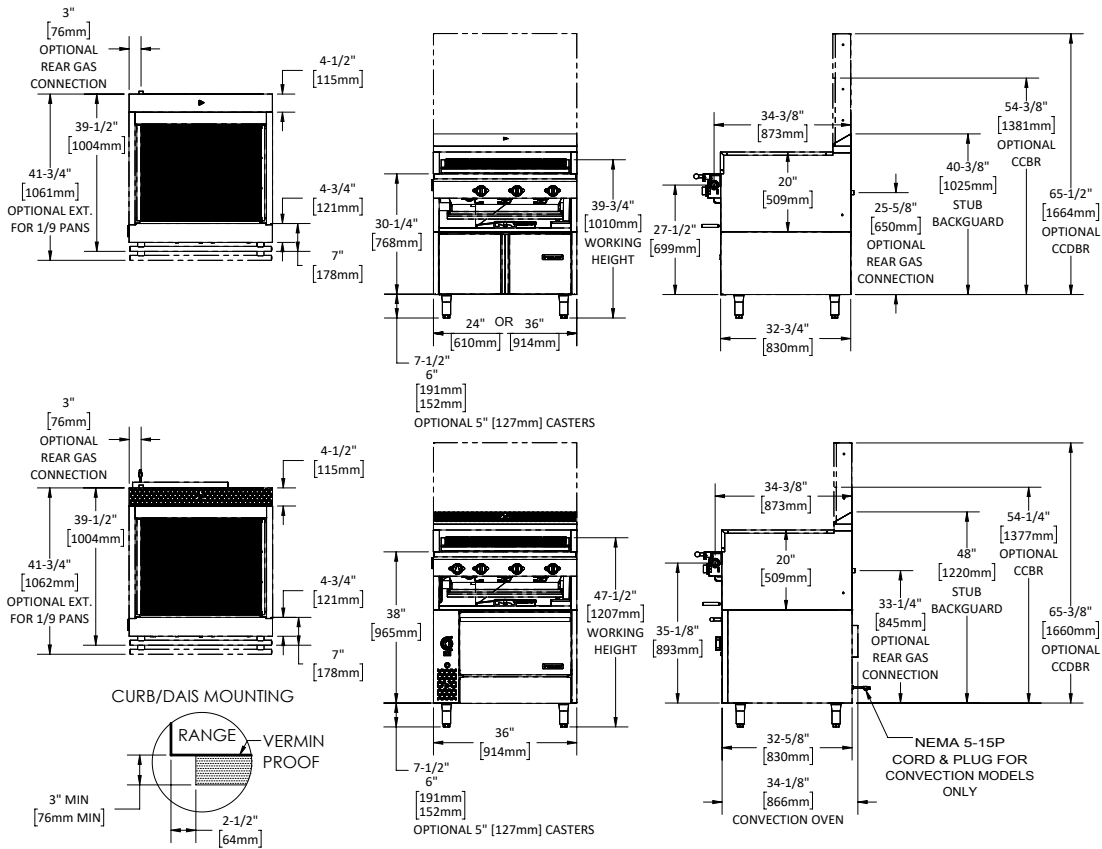

Model #	Description	Total BTU/h NAT. Gas	Total BTU/h Propane	Shipping	
				Cu Ft	lbs/kg
C36-ABR	Briquettes w/Adjustable Grates, 36"W, w/standard oven	175,000	170,000	58	655 (297)
C36-ABC	Briquettes w/Adjustable Grates, 36"W, w/convection oven	172,000	170,000	70	655 (297)
C24-ABS	Briquettes w/Adjustable Grates, 24"W, w/storage base	90,000	90,000	58	390 (177)
C36-ABS	Briquettes w/Adjustable Grates, 36"W, w/storage base	135,000	135,000	58	480 (218)
C36-ARR	CI Radiants w/Adjustable Grates, 36"W, w/standard oven	148,000	143,000	70	635 (288)
C36-ARC	CI Radiants w/Adjustable Grates, 36"W, w/convection oven	145,000	143,000	70	635 (288)
C24-ARS	CI Radiants w/Adjustable Grates, 24"W, w/storage base	72,000	72,000	70	320 (145)
C36-ARS	CI Radiants w/Adjustable Grates, 36"W, w/storage base	108,000	108,000	70	342 (155)

Individual Burner Ratings (BTU/h)		
Burner	NAT.	PRO.
Briquettes	45,000	45,000
Cast Iron Radiant	18,000	18,000
Standard Oven	40,000	35,000
Convection Oven	37,000	35,000

Interior Dimensions: In (mm)			
Product	Height	Width	Depth
Standard Oven	13-1/2 (343)	26-1/4 (667)	29 (737)
Convection Oven	13-1/2 (343)	26-1/4 (667)	25 (635)
Cabinet Base	20-1/2 (521)	32-1/4 (819)	31 (787)

Gas Pressure	NAT.	PRO.
Minimum Supply	7" WC	11" WC
Manifold Operating Pressure	6" WC	10" WC
Gas Manifold 1-1/4" NPT		

Combustible Wall Clearance	
Sides	Back
10" (254mm)	6" (152mm)

\*Range base convection oven (C) c/w NEMA 5-15P cord & plug, 1/3 hp motor, 120V 60Hz, 0.6A  
CI = Cast Iron

Garland reserves the right to make changes to the design or specifications without prior notice.

**Garland Commercial Ranges Ltd.**  
1177 Kamato Road,  
Mississauga, Ontario  
L4W 1X4 CANADA

**General Inquires 1-905-624-0260**  
USA Sales, Parts and Service 1-800-424-2411  
Canadian Sales 1-888-442-7526  
Canada or USA Parts/Service 1-800-427-6668

[www.garland-group.com](http://www.garland-group.com)  
7893  
01/24

