

KT TABLES EQUIPMENT STAND

- KT-26
- KT-30
- KT-40
- KT-50
- KT-64
- KT-80

Standard Features

- All type 304 stainless steel construction with 1 ½" dia legs
- Four (4) adjustable flanged feet for securing to the floor
- Removable sliding drain pan, with nylon roller action guides
- Stationary drain connection
- Full width drain trough
- Factory assembled kettle stand combinations, either direct steam or electric kettles
- Various stand widths to accommodate multiple kettles



STANDARD CONSTRUCTION SPECIFICATIONS

Shall be a Crown Model KT-24, KT-30, KT-40, KT-50, KT-64 or KT-80 table for mounting Crown counter top kettles.

All type 304 #4 finish stainless steel construction and shall be equipped with movable stainless steel drain pan and splash guard.

Table top has full width drain trough and 3.25" (83mm) diameter perforated drain connection that can be piped or placed over a floor drain.



Four (4) adjustable flanged feet for securing to the floor.

Table will be 21.5" high (546mm) and 24" (610 mm) front to back.



Approval Notes: _____

KT

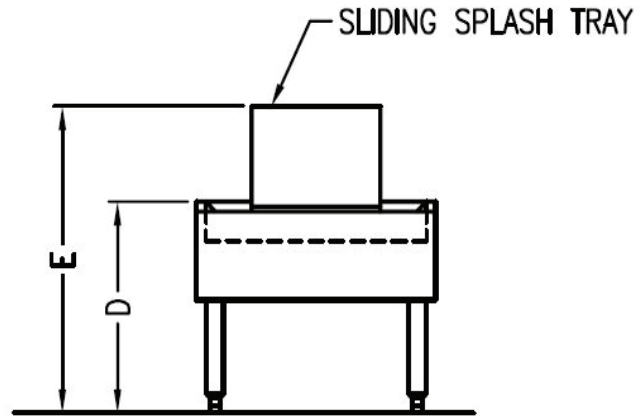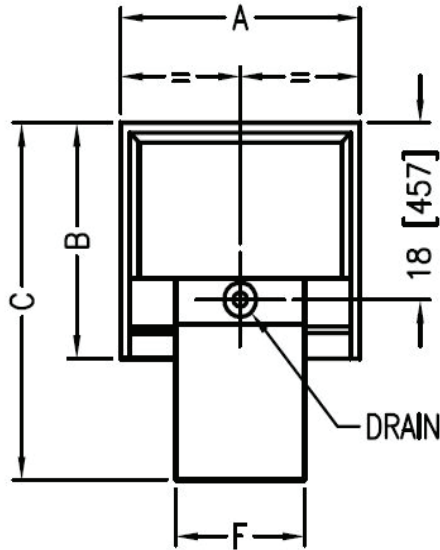

DIMENSIONS AND WEIGHT

MODEL	UNITS	A	B	C	D	E	F
KT-26	inches	26	24	36.375	21.5	32.25	14
	mm	(660)	(610)	(924)	(546)	(819)	(356)
KT-30	inches	30	24	38.375	20.5	31.25	18.5
	mm	(762)	(610)	(974)	(521)	(794)	(470)
KT-40	inches	40	24	36.375	21.5	32.25	14
	mm	(1016)	(610)	(924)	(546)	(819)	(356)
KT-50	inches	50	24	36.375	21.5	32.25	14
	mm	(1270)	(610)	(924)	(546)	(819)	(356)
KT-64	inches	64	24	36.375	21.5	32.25	14
	mm	(1626)	(610)	(924)	(546)	(819)	(356)
KT-80	inches	80	24	36.375	21.5	32.25	14
	mm	(2032)	(610)	(924)	(546)	(819)	(356)

MODEL	SHIPPING WEIGHT
KT-26	140 lbs. [63 kg]
KT-30	150 lbs. [68 kg]
KT-40	200 lbs. [91 kg]
KT-50	225 lbs. [102 kg]
KT-64	285 lbs. [129 kg]
KT-80	345 lbs. [156 kg]

**INTENDED FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.**

