

## INSULATED EXTRUDED SIDEWALL UTILITY CABINET MODEL 109-1840

### FEATURES AND BENEFITS:

- All purpose cabinet for transport and storage. Load with plastic food boxes filled with product to create your own food file.
- Insulated side and back walls prevent temperature loss.
- Same size top and base extend past sidewalls to act as natural bumpers for protection. Extruded frame fully welded.
- Body constructed of non-corrosive, Hi-Tensile aluminum for strength and ease of mobility.
- Reinforced, full length door swings 270° Card clip included.
- Gravity type latch secures door during transport.
- Interlocking extruded sidewalls hold 18" x 26" pans and plastic food boxes on 1-1/2" centers. Easy to clean.
- Interior pan stops on door allow proper air flow.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.

**Note:** Designed to hold standard 18 x 26" pans by the lip. Due to the variability of pan manufacturers/quality of pans being held/pan sizes, please contact manufacturer or provide a sample pan to ensure a proper fit.




109-1840

### ACCESSORIES and OPTIONS (Available at extra cost):

- Lock Hasp
- Various Caster Options
- Corner Bumpers
- Perimeter Bumper
- Plexiglas Door
- Push Handle
- Left-Hand Hinged Door
- Kold Keepers

See page A-20 for accessory details.

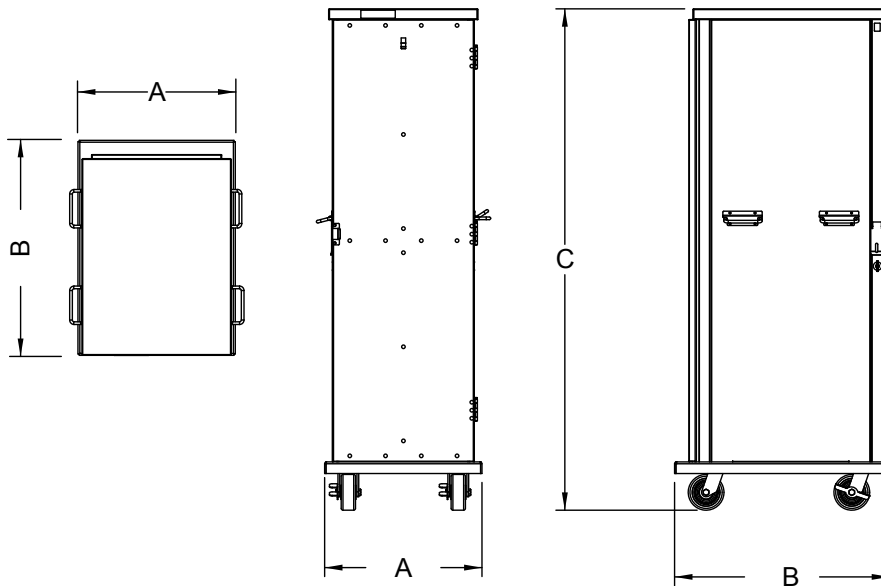

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
109-1840	40	18 x 26	IN	22	30-1/16	70-1/8	18-5/16	26	61-1/2	LBS	150
		460 x 660	MM	560	765	1780	465	660	1565	KG	68

When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

**CABINET:**

- Posts: Extruded channels, 7/8 x 2-1/4 x .102, welded to top and base, form a solid frame.
- Sides: Interlocking extruded 6" panels, smooth outer sides. Double wall with 1" insulation.
- Back panel: Fitted into posts, riveted to top and reinforced. Double wall with 1" insulation.
- Tie rod: Applied at front.
- Top: One piece .100 aluminum.
- Bail Handles (2): Mounted on each side.

**BASE:**

- One piece construction, .190 aluminum.
- Casters: 5" dia., swivel, modulus tires, 2" wide, load cap. 375 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

**DOOR:**

- Panel: Formed .100 aluminum.
- Reinforcement: 1/4 x 1-1/2 extruded bars riveted horizontally to top, center and bottom.
- Latch: Gravity type, nickel plated steel.
- Swings 270° on 3 butt hinges, riveted to posts and door.
- Pan stop channel.

**PAN SLIDES:**

- Extruded interlocking side walls act as pan slides on 1-1/2" centers.

**Note:** Designed to hold standard 18 x 26" pans by the lip. Due to the variability of pan manufacturers/quality of pans being held/pan sizes, please contact manufacturer or provide a sample pan to ensure a proper fit.

**SHORT FORM SPECIFICATIONS**

Cres Cor Insulated Utility Cabinet Model 109-1840. Formed and welded .100 aluminum top, .190 aluminum base. Interlocking extruded aluminum sidewalls for (40) 18" x 26" pans and plastic food boxes on 1-1/2" centers. Insulated side and back walls. Formed .100 aluminum reinforced door. 5" swivel modulus casters, Delrin bearings. Load capacity 375 lbs. each. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories:

\_\_\_\_\_



5925 Heisley Road • Mentor, OH 44060-1833  
 Phone: 877/CRESCOR • Fax: 440/350-7267  
 www.crescor.com

© Crescent Metal Products, Inc. 2017 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Made in America Since 1936