ēv	0.	20360 SW Tualatin 503-6	erica, LLC / Avery Ct. , OR 97062 26-1802 erica.com	Loco Item	ition: #:			_Qty:	AIA #	10-0020
Model#	10-0020)		Evo®	Profe	ssion	al T	ableto	C	0
The Evo Pro black sease inner and c range from to the outsi surrounds t food debris for any out	A SPECIFICATION Defessional Table oned steel coo buter gas tube of a 225°F to 550°F ide edge. A sto he underside of a coor display cor raal Gas or LP Pro-	NS: top has a 3 k surface his burners. Surf (121°C to 2 inless steel f the cook s sisional Tablo poking app	eated unde face tempe 88°C) from t drip pan co surface cato etop is an io	rneath by eratures the center mpletely ching all deal solution		Circular Fast Ten Heat Co • 30" stee • Two and • Var (12 • With • With • Kno bur • Elec • LP F Gas • LP F Gas • LP F Gas • LP F Gas • LP F Gas • Eas • Cooking • Eas • Au • Cooking • Eas • Eas • Cooking • Eas • Eas • Cooking • Cooking • Eas • Foo • Cooking • Stad • Stad	r Presei nperation (762m d outer iable to 1°C to h Natur bbs sep ners. ctronic Propan s option d For (g y setup at shiek maging a long gas tan ick rele d drip p ckable nsport. Deratio p d servi oking to an, to co sking to cha shi to sking to cha to sking to sking to sking to skin	ure Recovery m) circular blo ing surface. ar temperatur surface. emperatures 2 288°C). opane gas 48,000 barately contro push button ig e gas standar n. On and Off Pre b on folding bo d prevents here table top. gas hose allow k. cose removable ban. design for co n, Easy Mainte ce staff skill leve echniques: sar grilling, pan fr ast. urface is extre ean. teel burners ar ill overs. teel drip pan s	R Dp Designed For and Variable ack seasoned e zones: inner 225°F to 550°F 000 BTUs. BTUs. Di inner and oute gnition. d, and Natural emise Display anquet table. at from ws concealment e cook surface nvenient enance, Easy vel: Intermediate uté, braise, flatto y, roast, poach, mely durable an	p d
Data	Cook	Dime	nsions	BTU	Net	Sh	ip]		
Model	Surface	Н	W	Rate	Weigh					<u>.</u>

Due to ongoing product improvement, specifications are subject to change without notice.

Г





Approvals:

Available At:



Evo® Professional Tabletop

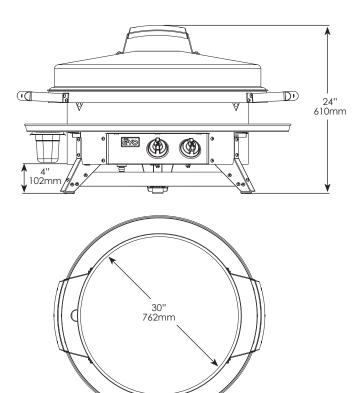

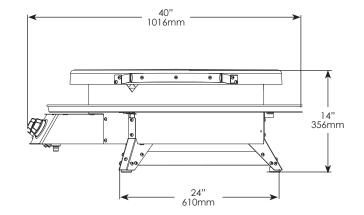



Regulator is set for an outlet pressure of 11" water column.

1/2" FNPT Inlet. 5' Hose & Regulator with QCC1 Supplied.

INSTALLATION REQUIREMENTS

Cooking surface must be installed level. Outdoor installation with minimum 12" (305mm) to adjacent combustible construction extended above the top of the appliance: 12" (305mm) from sides and 12" (305mm) from back. NATURAL GAS CONNECTION **OPERATING PRESSURE** No regulator, connect to an outlet pressure of 7" water column. INLET / SUPPLY CONNECTION

PP

1/2" FNPT. 12' Hose with 1/2" FNPT Quick Disconnect Supplied. 1/2" NPT to 3/8" Flare supplied. BTUs: CON

Unde

DIME

STAN

.

MAXI 24" x 14" x <u>COO</u> 30" d

<u>'Us:</u> 48,000 <u>ONNECTION LOCATION</u> nder Front Control Panel.	<u>BTUs:</u> 48,000 <u>CONNECTION LOCATION</u> Under Front Control Panel.
IMENSIONS	WEIGHT
<u>AXIMUM (H X W)</u> 4" x 40" with hood (610mm x 1016mm) 4" x 40" without hood (356mm x 1016mm) <u>OOK SURFACE</u> " diameter (762mm)	NET: 117 Ib EST. (53 kg) SHIP: 181 Ib EST (82 kg) CRATE DIMENSIONS: 45.5" x 45.5" x 34" (1156mm x 1156mm x 864mm)
ANDARD FEATURES	ACCESSORIES INCLUDED
30" circular black seasoned steel cook surface over dual independent manually controlled gas burners. Quick release removable cook surface and drip pan. Electronic push button ignition.	 Professional grill surface cleaning kit (3M brand) - Includes handle, cook surface cleaning pad and screen. 2 stainless steel spatulas and 1 stainless steel scraper. Owner's Manual & Use and Care Instructions.

LP PROPANE CONNECTION

INLET / SUPPLY CONNECTION

1/2" NPT to 3/8" Flare supplied.

OPERATING PRESSURE

Electronic push button ignition. . • Stainless steel lid.