

# Panel Thermometers



## Remote Vapor Tension Thermometers

With a temperature range of -40° to 60°F (-40° to 15°C), Models 6142-20, 6142-58, 6642-06 and 6742-19 are manufactured with refrigeration in mind. Use in dairy cases, floral displays, freezers and much more!

### Features

- Recalibrateable
- Dual scale dial
- 48" capillary (except where noted)
- Tin plated bulb and capillary
- Polycarbonate lens/bezel

See page 86 for mounting dimensions


MODELS: 6142-20, 6142-58, 6642-06, 6742-19	
<b>Specifications:</b>	
Instrument Range	-40° to 60°F/-40° to 15°C
Accuracy	±2°F to 40°F, ±3°F above 40°
Dial	2" diameter
Capillary Length	<b>6142-20, 6642-06, 6742-19</b> - 48" <b>6142-58</b> - 240"
Mounting	<b>6142-20 and 6142-58</b> - Front flange, back connect, flush mount. (3) .156" diameter mounting holes equally spaced on 2.625" diameter bolt circle. <b>6642-06</b> - Strap hanger, no flange, bottom connect. <b>6742-19</b> - U bracket, no flange, back connect.
Weight	<b>6142-20</b> - 5.5 oz <b>6142-58</b> - 8.5 oz <b>6642-06</b> - 5.5 oz <b>6742-19</b> - 8.0 oz

### Cooper Tips


Draft beer is not pasteurized and should be consumed within 30 days to maintain its fresh taste and aroma. It must be kept cold at approximately 38°F. If the temperature rises above 45°F it will cause the beer to turn sour and cloudy.

Wine bottles should be laid on their sides to keep the corks moist. The recommended storage temperature is 55°F. It is very important that the temperature range remains consistent between 50° to 60°F.


Model  
6142-20

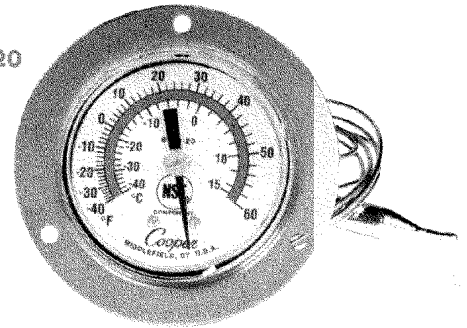

Model  
6142-58

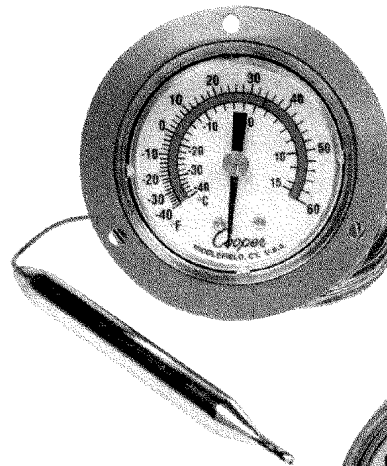

Model  
6642-06

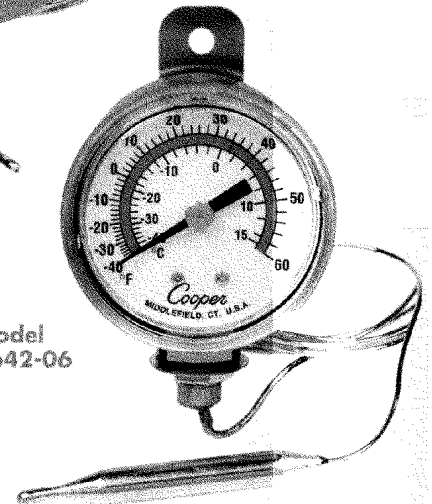

Model  
6742-19

