



ARTISAN 4 DECK OVEN



Artisan Stone Deck Oven, Individual Programmable Control per Chamber, Individual Shot Steam per Chamber, Standard One Piece Shipment, Single Electrical Connection, Single Water & Drain Connection, Stainless Steel Construction, Multiple Deck Heights (6", 8", 10", 12"), 1" Thick Refractory Stone Deck, 99 Hour Delay-Start Timer, Standard Heavy Duty Legs with Casters, Economy Mode for Energy Saving



PROJECT _____

ITEM NO. _____

NOTES _____

MODEL NUMBER: **4 T**

FEATURES

- Independent Baking Decks (up to 4) with Digital Control Panels
- Deck Capacity of 1, 2, 3 or 4 Pans
- Deck Heights
 - 6" (152mm)
 - 8" (204mm) STANDARD
 - 10" (254mm)
 - 12" (305mm)
- 600°F (316°C) Max Bake Temperature
- Independent Temperature Control for Upper & Lower Deck Elements, Plus Front Temperature Loss Control
- Independent Shot Steam Per Deck with Steam Box On/Off Control
- 99 Hour Delay Start Up Timer & Economy Mode

CONSTRUCTION

- Stainless Steel Construction
- 1" (25 mm) Refractory Stone Deck
- Single Point Connection for Electrical, Drain & Water
- Fully Insulated Illuminated
- Fully Retracting Doors (Save Space when Loading & Unloading)
- Legs with Swivel Casters (2 locking)
- One Piece Shipment

OPTIONS & ACCESSORIES

- Water Filter (50-1530)
- Standard Proofer for 1 - 2 Decks (ES4T)
- Low Profile Proofer for 3 Decks (ES4TP)
- Stainless Steel Deck
- Non-Functional Eyebrow Canopy (EH4T)
- Loaf Loader (LL)
- Single Phase Electrical
- 380-415V Electrical Configuration

CLEARANCES

- 1" (25mm) Sides & Back
- 6" (153 mm) Top

WARRANTY

- One Year Labor & Two Year Parts

PLEASE NOTE


- One Single Electrical Drain, Water Connection. Multiple Decks are inter-connected.
- Electrical Inlet located at the back on top right hand corner.
- For Steam Efficiency, use minimum water inlet pressure 50 PSI.
- To prevent steam system scale issues, install water softener rated for a minimum of 3 GPM.



*SHOWN IN 4T2 w/ OPTIONAL PROOFER



4T - Side Loaded

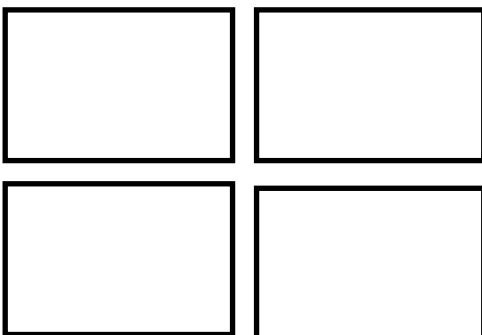



PROJECT _____

ITEM NO. _____

NOTES _____

MODEL NUMBER: **4 T**


DECK HEIGHT CONFIGURATOR

Optional Eyebrow Canopy



5"H (128mm) x 73"W (1854mm) x 52 1/4"D (1327mm)

Top Cover Plate



2 1/2"H (64mm) x 54 1/2"W (1384mm) x 46 1/2"D (1181mm)

Deck Choice #1 - 6" Internal Chamber Height



Exterior: 13 5/8"H (347mm) x 73"W (1854mm) x 52 1/4"D (1327mm)
Interior: 6"H (153mm) x 56"W (1420mm) x 37"D (939mm)
Crated Weight: 950 lbs (431 kg)

Deck Choice #2 - 8" Internal Chamber Height



Exterior: 15 5/8"H (397mm) x 73"W (1854mm) x 52 1/4"D (1327mm)
Interior: 8"H (203mm) x 56"W (1420mm) x 37"D (939mm)
Crated Weight: 950 lbs (431 kg)

Deck Choice #3 - 10" Internal Chamber Height




Exterior: 17 5/8"H (447mm) x 73"W (1854mm) x 52 1/4"D (1327mm)
Interior: 10"H (253mm) x 56"W (1420mm) x 37"D (939mm)
Crated Weight: 950 lbs (431 kg)

Deck Choice #4 - 12" Internal Chamber Height



Exterior: 19 5/8"H (497mm) x 73"W (1854mm) x 52 1/4"D (1327mm)
Interior: 12"H (303mm) x 56"W (1420mm) x 37"D (939mm)
Crated Weight: 950 lbs (431 kg)

Base Plate



2 1/2"H (64mm) x 73"W (1854mm) x 52 1/4"D (1327mm)

Standard Legs with Casters



Dimensions:
One Deck: 33"H (838mm) x 73"W (1854mm) x 44 1/4"D (1124mm)
Two Deck: 24"H (610mm) x 73"W (1854mm) x 44 1/4"D (1124mm)
Three Deck: 21"H (533mm) x 73"W (1854mm) x 44 1/4"D (1124mm)
Four Deck: 9"H (227mm) x 73"W (1854mm) x 44 1/4"D (1124mm)

Optional Proofer



Standard Proofer Dimensions (For 1 - 2 Chambers):
32 1/8"H (817mm) x 73"W (1854mm) x 44 1/2"D (1130mm)
Shipping Weight: 750 lbs (341 kg)

Low Profile Proofer Dimensions (For 3 Chambers):
24 5/8"H (651mm) x 73"W (1854mm) x 44 1/2"D (1130mm)
Shipping Weight: 750 lbs (341 kg)





PROJECT _____

ITEM NO. _____

NOTES _____

MODEL NUMBER: **4 T**

ELECTRICAL SYSTEM SINGLE PHASE

Model	Electrical System *ground wire not included						Water & Drain	Capacity (per deck)	
	Volts	Phase	Amps	kW	Hz	Wires		13"x18"	18"x26"
4T1	208	1	45	9.3	50/60	2	1/2" (12)	8	4
	240	1	39						
4T2	208	1	90	18.6	50/60	2	1/2" (12)	8	4
	240	1	78						
4T3	208	1	135	27.9	50/60	2	1/2" (12)	8	4
	240	1	117						
4T4	208	1	179	37.2	50/60	2	1/2" (12)	8	4
	240	1	155						

ELECTRICAL SYSTEM THREE PHASE

Model	Electrical System *ground wire not included						Water & Drain	Capacity (per deck)	
	Volts	Phase	Amps	kW	Hz	Wires		13"x18"	18"x26"
4T1	208	3	28	9.3	50/60	3	1/2" (12)	8	4
	240	3	24						
	480	3	12						
4T2	208	3	52	18.6	50/60	3	1/2" (12)	8	4
	240	3	48						
	480	3	24						
4T3	208	3	78	27.9	50/60	3	1/2" (12)	8	4
	240	3	72						
	480	3	36						
4T4	208	3	104	37.2	50/60	3	1/2" (12)	8	4
	240	3	96						
	480	3	48						

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL & REVIT DRAWINGS UPON REQUEST

REVISION B | 8/8/2023

Follow Us



Doyon

5600 13th Street, Menominee, MI 49858

906.863.4401 | 800.338.9886 | www.doyon.qc.ca

