U-LINE COMMERCIAL

Product Specifications

25 cu ft Freezers, Reach-In

- Improve the flow and function of your space by having frozen items where you need them most
- Comfortably fits 18" x 26" sheet pans (not included)
- 4 casters included (2 locking) for easy mobility
- LED lighting on glass door models





UCFZ527-SS31A

UCFZ527-SG31A

Model	Description	Voltage/Hz/Amps	Shipping Weight
UCFZ527-SS31A	25 cu ft Freezer Solid Door, Reach-In, Field Reversible Hinge	115v / 60hz / 6.2	297 lb
UCFZ527-SG31A	25 cu ft Freezer Glass Door, Reach-In, Field Reversible Hinge	115v / 60hz / 6.2	353 lb

Specifications

UCFZ527-SS31A dimensions: 82 $\%_{32}{''}$ H x 26 $^{57}\!/_{64}{''}$ W x 31 $1\!/_{2}{''}$ D

UCFZ527-SG31A dimensions: 82 9/32" H x 26 57/64" W x 31 1/2" D

AISI 304 Stainless steel interior and exterior with lock

Autodefrost

CFC-free high-density polyurethane insulated cabinet

Environmentally friendly R290 refrigerant: 3.9 oz (0.110 kg)

Electronic digital temperature control with alarms

Factory pre-wired for dedicated outlet, 11 ft. cord and plug included NEMA 5-15P

High efficiency evaporator coil & condenser

High efficiency top-mounted compressor

NSF/ANSI Standard 7 compliant

Removable magnetic gasket for easy cleaning

Self-lubricating, sealed cast iron evaporator fan motor with high volume air flow design

Temperature range: -13°F to 14°F

Volume of 25 cu ft


1 section, includes 3 epoxy coated wire shelves

Accessories	Description	Shipping Weight
ULAQ32-0002	(1) Epoxy coated wire shelf, 20 1/8" x 25 5/8" for reach-ins	7 lb
ULA4080584	(1) Stainless steel shelf guide for all reach-ins except UCRE553 & UCFZ553, 24 3/4"	.88 lb
ULA80110300	Interior LED lighting kit for solid door reach-ins	2.2 lb




Product Specifications • 25 cu ft Freezers, Reach-In


Front (Open)




Side

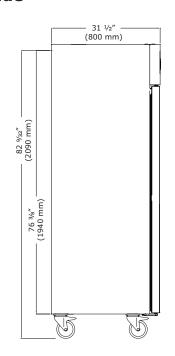


Front (Closed - Glass Door)



Top



Side



Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts) See complete warranty for details



