



FULL JACKET ELECTRIC STEAM PEDESTAL KETTLE



- EP-20F
- EP-30F
- EP-40F
- EP-60F

OPERATION SHALL BE BY:

Electrically, self-generating closed steam system equipped for operation on:

- 208 VAC, 1 phase, 50/60 Hz (12 to 18 kW only)
- 208 VAC, 3 phase, 50/60 Hz
- 220 VAC, 1 phase, 50/60 Hz (12 to 18 kW only)
- 220 VAC, 3 phase, 50/60 Hz
- 240 VAC, 1 phase, 50/60 Hz (12 to 18 kW only)
- 240 VAC, 3 phase, 50/60 Hz
- 380/220 VAC, 3 phase, 50/60 Hz 4 wire
- 415/240 VAC, 3 phase, 50/60 Hz 4 wire

OPTIONS & ACCESSORIES AT ADDITIONAL COST

- | | | |
|--|---|--|
| <input type="checkbox"/> 3" (76 mm) draw-off valve (TVS-3) with perforated strainer (TPS-) | <input type="checkbox"/> Etched gallon markings (GM-) | <input type="checkbox"/> Strainer hook (SH) |
| <input type="checkbox"/> 24 kw on 40, 60, 80 gallon | <input type="checkbox"/> Etched litre markings(LM-) | <input type="checkbox"/> Draw-off valve hose kit (DVHK-) |
| <input type="checkbox"/> 33 kw on 60, 80, 100 gallon | <input type="checkbox"/> Correctional package | <input type="checkbox"/> Calibrated thermostat dial "F" |
| <input type="checkbox"/> 380 VAC, 3 Phase, 50/60 Hz | <input type="checkbox"/> Single pantry faucet with swing spout (SF-12) | <input type="checkbox"/> Calibrated thermostat dial "C" |
| <input type="checkbox"/> 415 VAC, 3 Phase, 50/60 Hz | <input type="checkbox"/> Double pantry faucet with swing spout (DF-12) | <input type="checkbox"/> Single pantry kettle filler (SP-KF) |
| <input type="checkbox"/> 480 VAC, 3 Phase, 50/60 Hz | <input type="checkbox"/> One piece lift off cover (C-) | <input type="checkbox"/> Double pantry kettle filler (DP-KF) |
| <input type="checkbox"/> 600 VAC, 3 Phase, 50/60 Hz | <input type="checkbox"/> Triple basket assembly (TBA-) | <input type="checkbox"/> Kettle heat shield (KHS-) |
| <input type="checkbox"/> Two piece hinged stainless steel cover (2PHC-) | <input type="checkbox"/> Solid stainless steel disc for draw-off valve (TSS-) | |
| | <input type="checkbox"/> Graduated measuring strip (CMS-) | |

STANDARD CONSTRUCTION SPECIFICATIONS

Shall be a Crown Model EP-20F, EP-30F, EP-40F, EP-60F, self-generating, electric, full jacket, low height pedestal kettle.

A double wall kettle interior shall form a steam jacket around the full kettle.

The jacket enclosure shall contain distilled water which is factory sealed.

The bottom of the kettle shall be of hemispherical design for superior heat circulation.

The pedestal base shall have four, 7/16" holes evenly spaced for securing unit to the floor.

Construction shall be all welded #4 finish stainless steel, type 304.

The interior liner shall be standard with 316 stainless steel for high acid content cooking.

The controls shall be integrally mounted and shall include a power switch, thermostat, pilot light, low water light, vacuum/pressure gauge, safety relief valve, and low water shut off.

Faucet bracket standard.

The kettle shall be standard with removable elements.


Convenience features shall include a 2" (50 mm) draw-off valve and a spring assist hinged stainless steel domed cover.

The kettle shall be ASME Code stamped, National Board Registered, c-CSA-us and NSF certified.

The kettle shall operate in a temperature range of 165°F to 285°F (74°C to 140°C) at a maximum pressure of 50 psi (345 kPa).



Approval Notes: _____

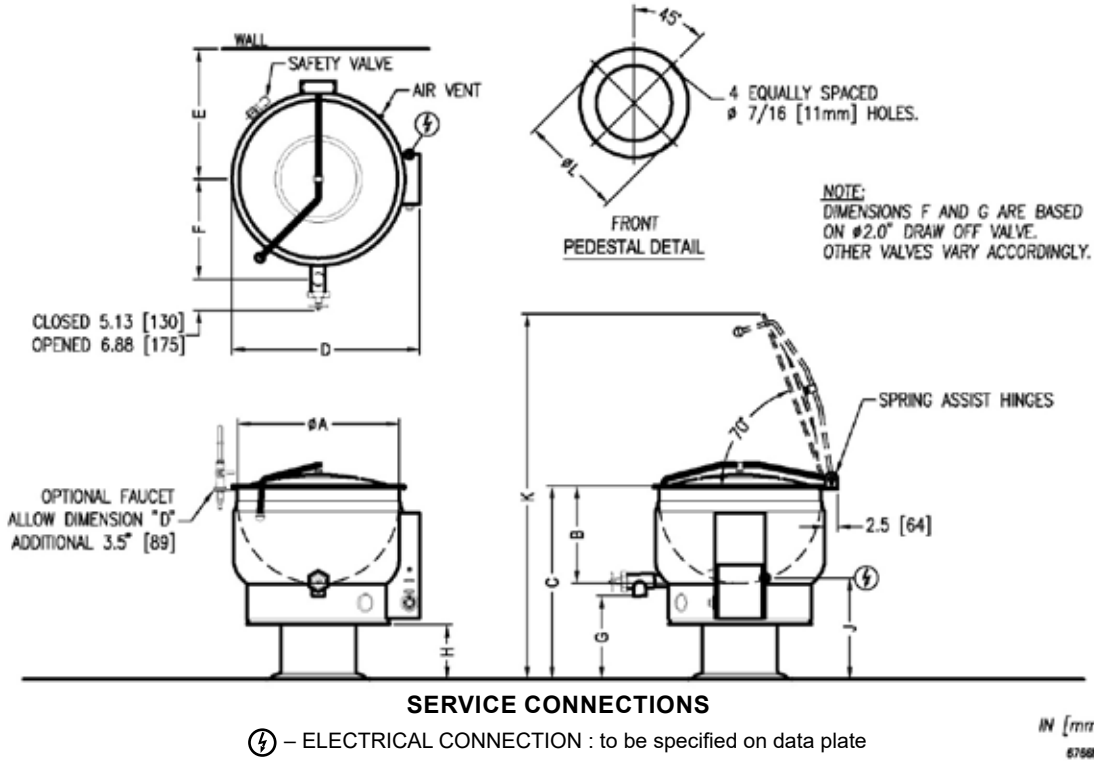

DIMENSIONS

| MODEL | CAPACITY | UNITS | A | B | C | D | E | F(2") | F(3") | G(2") | G(3") | H | J | K |
|--------|--------------------------|---------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|
| EP-20 | 20 gallons (76 liters) | in (mm) | 21" (533) | 18" (457) | 38" (965) | 25.25" (641) | 18.5" (470) | 14.75" (375) | 15.5" (394) | 18" (457) | 17.13" (435) | 13.38" (340) | 20.75" (527) | 60.5" (1537) |
| EP-25 | 25 gallons (95 liters) | in (mm) | 21" (533) | 21.25" (540) | 37.25" (946) | 25.25" (641) | 18.5" (470) | 14.75" (375) | 15.5" (394) | 14.12" (358) | 13.13" (333) | 9.5" (241) | 17" (432) | 58.75" (1492) |
| EP-30 | 30 gallons (114 liters) | in (mm) | 24" (610) | 20" (508) | 38" (965) | 28.25" (718) | 20" (508) | 16" (406) | 16.5" (419) | 15.75" (400) | 15" (381) | 11.25" (286) | 18.88" (479) | 63.5" (1613) |
| EP-40 | 40 gallons (152 liters) | in (mm) | 26" (660) | 22.5" (572) | 38" (965) | 30.25" (768) | 21" (533) | 17" (432) | 18" (457) | 13.5" (343) | 13.5" (343) | 8.88" (225) | 16.38" (416) | 65" (1651) |
| EP-60 | 60 gallons (227 liters) | in (mm) | 29.5" (749) | 26" (660) | 42" (1067) | 33.75" (857) | 20.63" (524) | 18" (457) | 19.25" (489) | 13.88" (352) | 12.88" (327) | 9.63" (244) | 17.13" (435) | 75" (1905) |
| EP-80 | 80 gallons (303 liters) | in (mm) | 33" (838) | 28" (711) | 45" (1143) | 37" (940) | 22.38" (568) | 19.5" (495) | 20.5" (521) | 14.88" (378) | 13.88" (352) | 11.25" (286) | 18.63" (473) | 81" (2058) |
| EP-100 | 100 gallons (379 liters) | in (mm) | 35.5" (902) | 30" (762) | 48" (1219) | 40" (1016) | 23.63" (600) | 21.5" (546) | 22.5" (572) | 15" (381) | 14.5" (368) | 13" (330) | 20.5" (521) | 87" (2210) |

ELECTRICAL CHARACTERISTIC

| AVAILABLE KW | | | AMPS PER LINE | | | | | | | | |
|--------------|----------|----------|---------------|-------|------|------|------|------|------|------|------|
| MODEL | STANDARD | OPTIONAL | kW | PHASE | 208V | 220V | 240V | 380V | 415V | 480V | 600V |
| EP-20F | 18 | 24 | 18 | 1 | 86.5 | 81.8 | 75.0 | N/A | N/A | N/A | N/A |
| EP-30F | 18 | 24 or 33 | | 3 | 50 | 47.2 | 43.3 | 27.3 | 25 | 21.6 | 17.3 |
| EP-40F | 18 | 24 or 33 | | 3 | 66.6 | 62.9 | 57.7 | 36.4 | 33.3 | 28.8 | 23.1 |
| EP-60F | 24 | 33 | | 3 | 91.6 | 86.6 | 79.4 | 50.1 | 45.9 | 39.7 | 31.7 |

SPECIFICATIONS

| MODEL | kW | CAPACITY | | MODEL | SHIPPING WEIGHT | MINIMUM CLEARANCE | |
|--------|----|-----------|-----------|--------|-------------------|-------------------|--------------------------|
| EP-20F | 18 | 20 Gallon | 76 Liter | EP-20F | 245 lbs. [111 kg] | SIDES BACK | 3" [76 mm] 3" [76 mm] |
| EP-30F | 18 | 30 Gallon | 114 Liter | EP-30F | 375 lbs. [170 kg] | | |
| EP-40F | 18 | 40 Gallon | 152 Liter | EP-40F | 420 lbs. [191 kg] | | |
| EP-60F | 24 | 60 Gallon | 227 Liter | EP-60F | 460 lbs. [209 kg] | | |

**INTENDED FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.**

