

# Cleveland

MODULAR CABINET BASE,  
ELECTRIC STEAM BOILER, 24, 36 OR 48 KW, 24" (600MM)  
WIDE BASE

Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
FCSI Section 11400 \_\_\_\_\_  
Approved \_\_\_\_\_  
Date \_\_\_\_\_

Modular Bases & Equipment Stands

## Models

- 24-EM-24



## Standard Features

- Type 304 Stainless Steel exterior enclosure; TableTop with #4 finish
- Hinged Cabinet Door
- 6" Stainless Steel Legs with level adjustment
- Solid State Steam Boiler Water Level Controls
- Low Water Power Cut-off
- Pressure Limit Controls with 15 psi Safety Valve
- Major components serviceable from the front of the unit
- Steam Boiler empties under pressure (blowdown) automatically upon each Shut-Down. Automatic Water Refill on Start-Up
- Separate "Start/Reset" illuminated switch controls, plus Pressure Gauge
- Steam Boiler Drain incorporates Water Cooling and "Jet Rinsing"
- Steam Boiler is complete with Access Hole/Cover Plate and Sight Glass Gauge
- Secondary Low Water Cut-Off, factory installed (CALE)  
(Required for AZ. AR. CA. CO. CT. DE. FL. GA. HI. IL. IA. KS. MD. MA. MI. MN. MT. NE. NV. NM. NC. OK. OR. PR. RI. TN. UT. VA. WA. WV., Buffalo, NY, Wash. DC)
- Standard voltage is 208/220 volt, 60 Hz, 3 Phase, 3 Wire
- Single cold water Connection (no hot water required)
- Stainless Steel Base Frame (FSS)

## Short Form Specifications

Shall be CLEVELAND Model \_\_\_\_\_ -Em \_\_\_\_\_ KW Electric Steam Boiler, Modular Cabinet Base, type 304 Stainless Steel exterior enclosure, Table Top and 6" Level Adjustable Legs. Console mounted Controls, Pressure Gauge and Illuminated "Start/Reset" Control Switches. Solid State Water Level Steam Boiler Controls. Steam Boiler drains under pressure (blowdown) after each Shut-Down, Automatic Water Fill on Start-Up. 15 psi Safety Valve.

## Options & Accessories

- Power Take-Off Kit (EPTO)

KE004046-116

# Cleveland


Modular Bases & Equipment Stands

### Steam Flow Rating of Cleveland Steam Generators

Electric KW Input	Steam Output lbs. per hour	Steam Generator H.P.
24 KW	70	2.0
36 KW	120	3.5
48 KW	150	4.3

### WATER QUALITY REQUIREMENTS (Boilers, Generators)

TTDS:	50-250 ppm
Hardness:	50 - 200 mm (3 - 12 gpg)
pH value:	7.0 - 8.5
CL (Chloride):	max 50 ppm
Cl <sub>2</sub> (free chlorine):	max 0.1 ppm
SiO <sub>2</sub> (silica):	max 13 ppm
NH <sub>2</sub> Cl: (mono-chloramine)	max 0.1 ppm
Total Alkalinity:	50 - 100 ppm

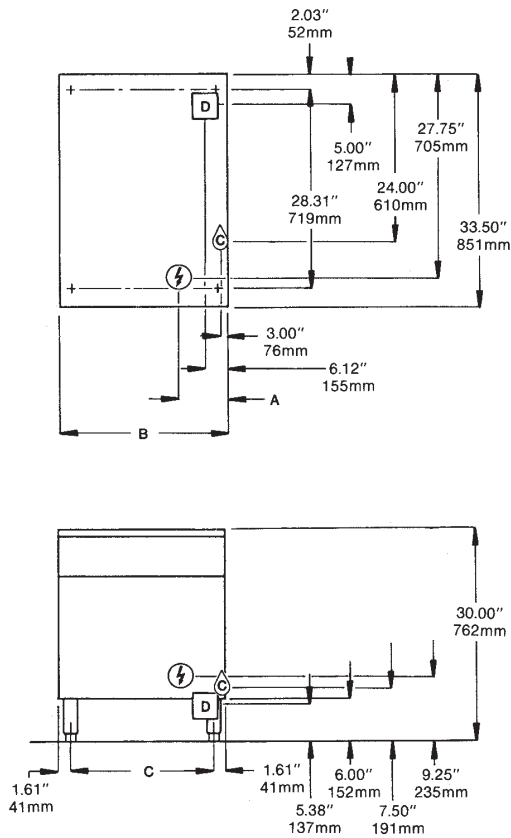

		A	B	C
24-EM	IN	7.69	23.62	20.40
	mm	195	600	518

ELECTRIC ⚡					WATER 💧	DRAINAGE □	CLEARANCE
KW		208V	220V	240V			
24	3 PHASE	AMPS PER LINE	57	63	52	26	Right - 3", Left - 3", Rear - 3" (12" on control side if adjoining wall or equipment is over 30" high for service access) Contact factory for variances to clearances.
	1 PHASE		99	N/A	89	45	
36	3 PHASE	100	80	87	44		
48	3 PHASE	119	127	107	53		

For Power Supply, use copper wire only

#### NOTES:

Cleveland Range reserves right of design improvement or modification, as warranted.  
 Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes.  
 Cleveland Range equipment is built to comply with applicable standards for manufacturers. Included among those approval agencies are U.L./NSF#4 and CSA (AGA, CGA).

(NOT TO SCALE)

760 Beta Drive, Unit D  
 Mayfield Village, Ohio 44143

Tel 1.216.481.4900  
 Fax 1.216.481.3782  
 Email [steam@clevelandrange.com](mailto:steam@clevelandrange.com)

[www.clevelandrange.com](http://www.clevelandrange.com)  
 Section 4, Page 22  
 06 / 2021

Timeless Quality, Trusted For Life®