

Refrigeration Equipment 4-Drawer Mega Top Prep Table 61" Long 24-1/6 Pan

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738288 (KCHMT60.24.4D)

4-Drawer Mega Top Prep
Table 61" Long 24-1/6 Pan

Short Form Specification

Item No. _____

4-drawer mega top refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and interior bottom panels in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 61x9x0,5 in. Control panel, and removable drawer gaskets. Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty.

Main Features

- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.


Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Pre-wired heavy duty power cord.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

APPROVAL: _____

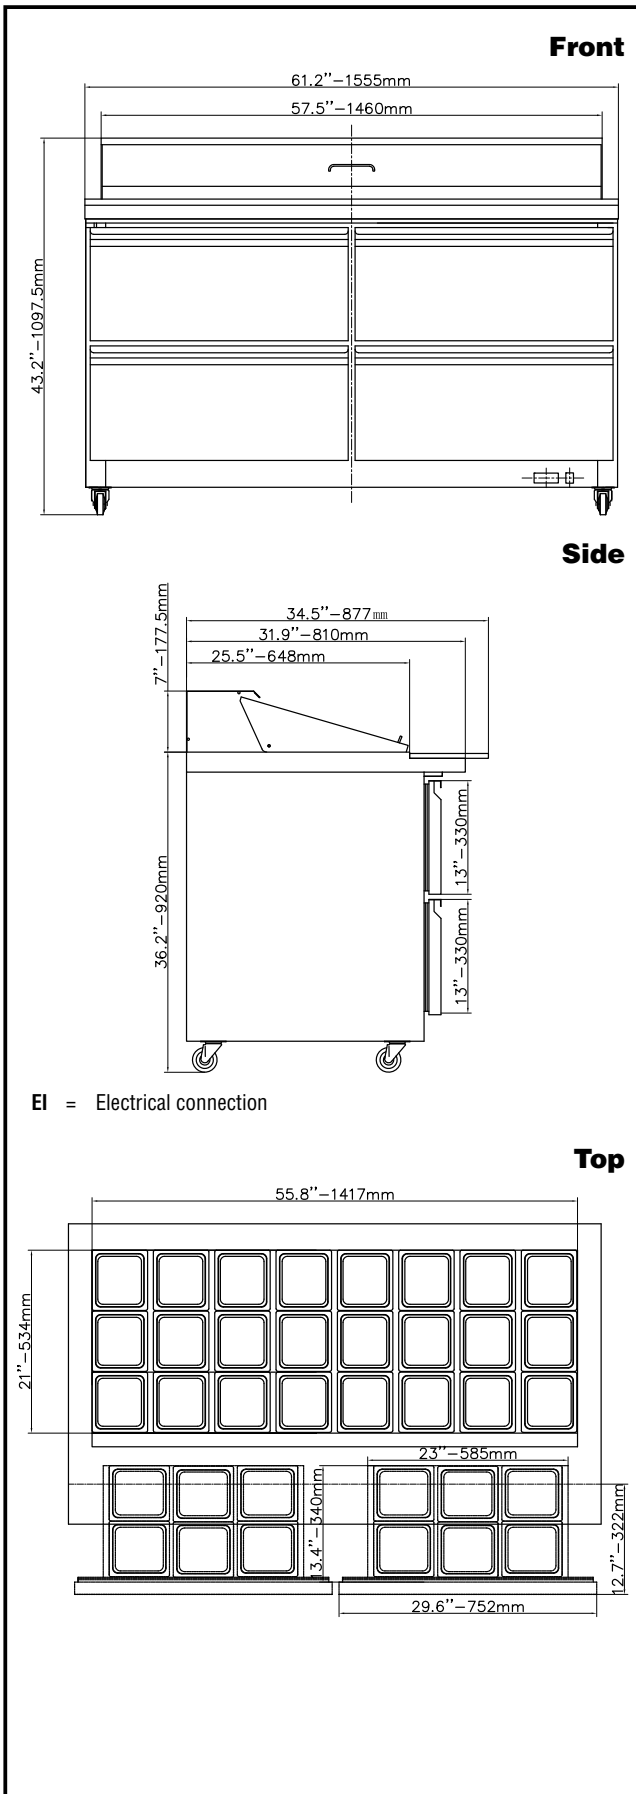

Electric

| | | |
|------------------------|------------------------|------------------|
| Supply voltage: | 738288 (KCHMT60.24.4D) | 115 V/1 ph/60 Hz |
| Electrical power, max: | | 0.78 kW |
| Plug type: | | USA NEMA 5-15P |

Capacity:

| | |
|-----------------|--------------|
| Gross capacity: | 15.5 cu.feet |
|-----------------|--------------|

Key Information:

| | |
|-------------------------------|---|
| Capacity: | 15.5 cu.ft. |
| External dimensions, Width: | 61 1/4" (1555 mm) |
| External dimensions, Depth: | 34 1/2" (877 mm) |
| External dimensions, Height: | 43 3/16" (1097.5 mm) |
| Internal Dimensions (depth): | 23 13/16" / (605 mm) |
| Internal Dimensions (height): | 23 1/2" / (597 mm) |
| Internal Dimensions (width): | 56 1/4" / (1429 mm) |
| Shipping height: | 47 1/4" (1200 mm) |
| Shipping weight: | 518 lbs (235 kg) |
| Shipping volume: | 61.5 ft ³ (1.74 m ³) |
| Type of external material: | Stainless Steel |
| Type of internal material: | Polystyrene |
| Warranty: | 3 / 5 years |
| Approvals | ETL C&US;ETL SANITATION |
| N° of drawers: | 4 |

Refrigeration Data

| | |
|-----------------------------|--------------|
| Compressor power: | 1/3 hp |
| Operating temperature min.: | 32 °F |
| Operating temperature max.: | 41 °F |
| Condenser type: | Fin & tube |
| Defrost type: | Auto Defrost |

Sustainability

| | |
|----------------------|----------|
| Current consumption: | 7.5 Amps |
| Refrigerant type: | R290 |
| GWP Index: | 3 |
| Refrigerant weight: | 90 g |