




# DIRECT DRAW DISPENSER - LESS TOWERS

PRO-LINE™ 69" - 3 KEG

- Designed by beer-industry experts for performance and value.
- Front breathing for cooling and exhaust.
- Integrated glass rinser: condition the glass before pouring.
- Full-size drain tray – larger work area and improved hygiene.



**MDD68-E-LT**  
Black



Integrated water glass rinser



*Adjustable Digital Thermostat!*  
*Easy to read exterior mounted*



**MDD68S-E-LT**  
Stainless Steel



Listed by Edison Testing Laboratories.  
Conforms to UL & NSF Standards.

[www.micromatic.com](http://www.micromatic.com) • 1 (866) 327-4159

PRO-LINE™ 69" - 3 KEG

Job Number: \_\_\_\_\_ Location: \_\_\_\_\_


Part No.	Finish	Doors	Shipping Weight
☐ MDD68-E-LT	Black with Solid Doors	2	163 kg
			359 lbs
☐ MDD68S-E-LT	Stainless Steel with Solid Doors	2	163 kg
			359 lbs

**Operating Performance**

Capacity of 1/2 Kegs	3	Voltage	115/60/1
Cubic Feet (liters)	28 (793)	Plug Type	NEMA-5-15P
Approval	ETL Listed	Cord Length	8'
Compressor HP	1/3	Refrigerant	R290
Running Amps	3.0	Charge oz	4.9

Exterior	All Models: 18 gauge 201 grade stainless steel (s/s) top, 22 gauge solid doors, 24 gauge steel front, sides and back. Black Models: Front, sides, back and doors black vinyl over steel. S/S Models: Front, sides, back and doors are s/s.
Interior	20 gauge stainless steel floor and walls, rugged false floor, reinforced frame
Ventilation	Front breathing for cooling and exhaust
Plumbing	Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing.
Glass Rinser	15-20 psi water connection. It is recommended a licensed plumber connect the glass rinser to the water supply line. Always use an in-line shut-off and water pressure regulator. Micro Matic shall not be held liable for damage caused by improper installation.
Insulation	Foamed-in-place using high density, CFC-free polyurethane; 2" top, walls and floor
Accessories	Casters or 6" fixed legs (order separately)

**Dimensions**

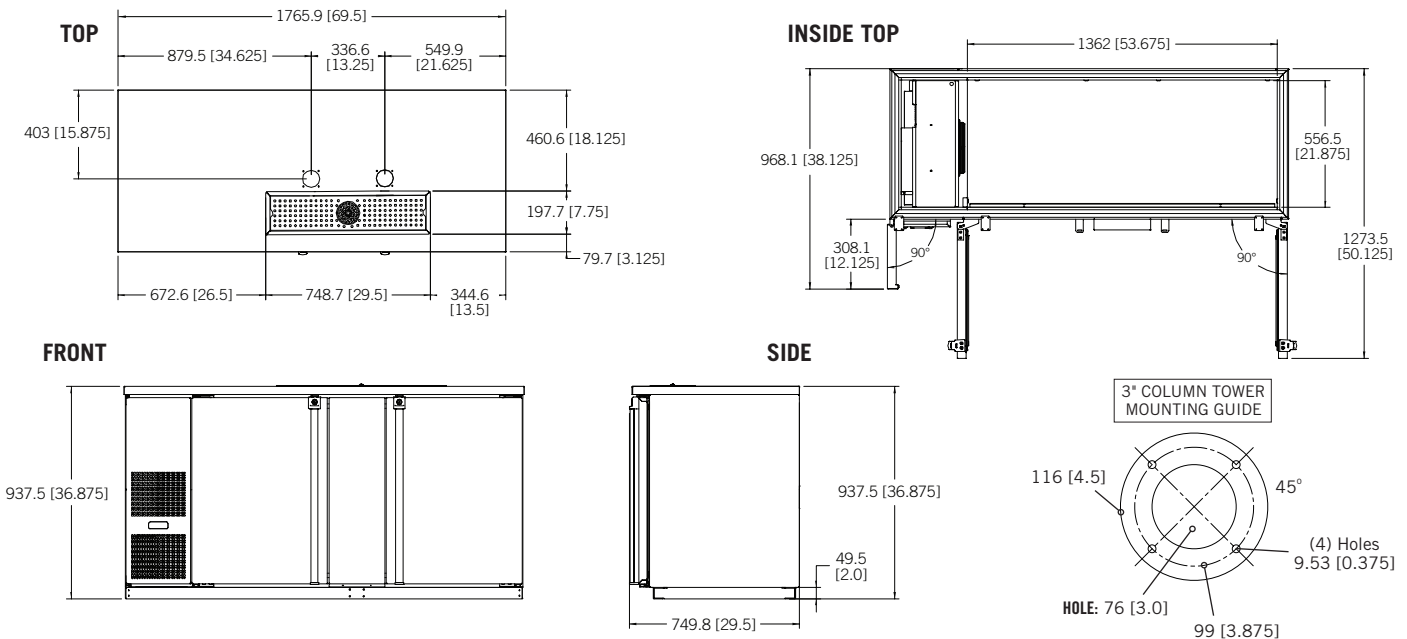

 **MICRO MATIC**  
 Toll-Free: 1-866-327-4159  
[www.micromatic.com](http://www.micromatic.com)

**West**  
 19791 Bahama St.  
 Northridge, CA 91324  
 Tel. (818) 701-9765  
 Fax. (818) 701-9844

**Central**  
 10726 North Second St.  
 Machesney Park, IL 61115  
 Tel. (815) 968-7557

**Southeast**  
 2386 Simon Ct.  
 Brooksville, FL 34604  
 Tel. (352) 799-6331

**Northeast**  
 4601 Saucon Creek Rd.  
 Center Valley, PA 18034  
 Tel. (610) 625-4464  
 Fax. (610) 625-4466