



RESOURCES

888-310-4393 | [www.bk-resources.com](http://www.bk-resources.com)

# MOBILE HAND SINK

## INSTALLATION AND OPERATING MANUAL

Models:

MHS-V3030-C-DM	MHS-V3030-H-DM
MHS-V3030-C-BKD	MHS-V3030-CH-BKD
MHS-2424-C-DM	MHS-2424-H-DM
MHS-2424-C-BKD	MHS-2424-CH-BKD



RESOURCES  
888-310-4393 | www.bk-resources.com

## MOBILE HAND SINK OPERATING MANUAL

**DM Spout Style:** This Deck Mount Spout allows the foot switch to control the water flow.




**BKD Faucet Style:** This faucet allows for Hot and Cold water valve control. The foot switch must still be depressed to activate the water pump.





The foot switch turns on the water pump when it is depressed. This protects the pump if the tank runs out of water.

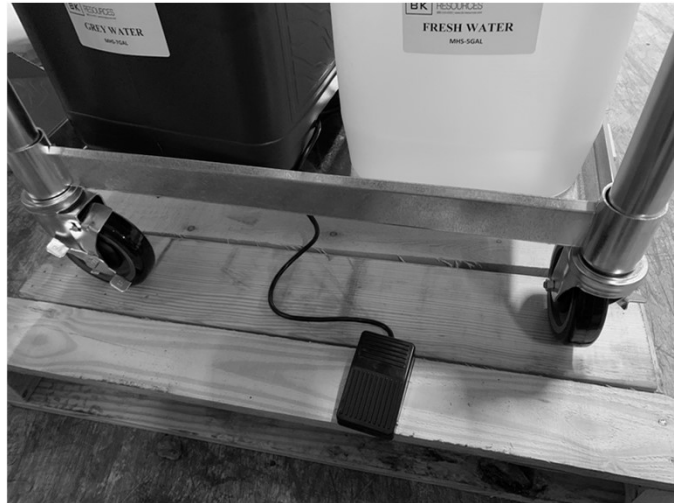

To fill the fresh water tank add water by removing the cap as shown.



To drain the grey water tank pull the drain hose out as shown. And dump the grey water container in a suitable drain location.





The 15 ft. GFCI power cord is supplied for connecting to a 15A 120 volt power supply. This will need to be energized for the water pump to operate. You may need to reset the GFCI by pushing the red button.



The sink drain is equipped with a male garden hose connection for drain hose connection. Please make sure the drain location is lower than the bottom of the sink.





The MHS-2424 units are supplied with a vertical towel holder for mounting behind the sink.



The paper towel holder and miscellaneous accessories are included in the box with each unit.



This is the optional water heater used on the H and CH units. The water temperature going to the faucet is controlled by the temperature adjustment dial in the top center.

