

# Deep Undercounters/Worktops with Drawers

## SUR D / SWR D Series



- |                  |                                      |  |
|------------------|--------------------------------------|--|
| <b>SUR-46-D2</b> | <b>SUR-67-D2</b><br><b>SUR-67-D4</b> | <b>SUR-93-D2</b><br><b>SUR-93-D4</b><br><b>SUR-93-D6</b> |
| <b>SWR-46-D2</b> | <b>SWR-67-D2</b><br><b>SWR-67-D4</b> | <b>SWR-93-D2</b><br><b>SWR-93-D4</b><br><b>SWR-93-D6</b> |

Item # \_\_\_\_\_

### Standard Features

- Our deep undercounter and worktop units are designed with durability and strength that you will not find in any other products in its class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- Drawers: Heavy duty drawer slides, full length recessed drawer handles; accommodates (2) 12" x 20" x 6" deep pans per drawer (pans sold separately).
- Doors: Heavy duty stainless steel doors with full length recessed door handles and gentle self closing mechanism; interior instep design for added insulation and protection of door gaskets.
- With innovative and eco-friendly technology, Fagor utilizes R-290 Hydrocarbon designed to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).
- Refrigerators maintain product temperatures from 33° to 38 °F.
- Side breathing refrigeration system for built-in applications.



SUR-46-D2



SUR-67-D4



SWR-93-D2

### Options & Accessories

- 6" adjustable legs (set of 4)
- 3" casters (set of 4, front 2 w/ clips)
- Additional epoxy coated shelves
- Universal tray slides
- 220 Voltss / 50 cycles / 1 phase



\*Conforms to UL & NSF-7 standards

	Model	Doors	Drawers	Capacity Cu. Ft.	Amps	HP	Volts	Cabinet Dimensions W / D / H			Shipping (Wt. Cubes)	
	<b>Undercounters/Worktops - Drawers</b>	<b>Undercounters with Drawers</b>										
<b>SUR-46-D2</b>		0	2	9.9	3.0	1/3	115	46"	32-1/2"	30"	289	43
<b>SUR-67-D2</b>		1	2	18.6	3.0	1/3	115	67-1/4"	32-1/2"	30"	363	62
<b>SUR-67-D4</b>		0	4	18.6	3.0	1/3	115	67-1/4"	32-1/2"	30"	403	62
<b>SUR-93-D2</b>		2	2	26.5	3.0	1/3	115	93"	32-1/2"	30"	440	91
<b>SUR-93-D4</b>		1	4	26.5	3.0	1/3	115	93"	32-1/2"	30"	480	91
<b>SUR-93-D6</b>		0	6	26.5	3.0	1/3	115	93"	32-1/2"	30"	520	91
<b>Worktops with Drawers</b>												
<b>SWR-46-D2</b>		0	2	9.9	3.0	1/3	115	46"	32-1/2"	34"	289	43
<b>SWR-67-D2</b>		1	2	18.6	3.0	1/3	115	67-1/4"	32-1/2"	34"	363	62
<b>SWR-67-D4</b>		0	4	18.6	3.0	1/3	115	67-1/4"	32-1/2"	34"	403	62
<b>SWR-93-D2</b>		2	2	26.5	3.0	1/3	115	93"	32-1/2"	34"	440	91
<b>SWR-93-D4</b>	1	4	26.5	3.0	1/3	115	93"	32-1/2"	34"	480	91	
<b>SWR-93-D6</b>	0	6	26.5	3.0	1/3	115	93"	32-1/2"	34"	520	91	

\* Depth does not include 1" bumper. \*\* Height does not include 5" casters (6" overall) or 6" optional legs.

# Deep Undercounters/Worktops with Drawers

## SUR D / SWR D Series



### Specifications

#### Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor.

Doors: heavy duty stainless steel exterior and interior, in-step design with hinged solid doors and positive seal. Self closing mechanism and 120° stay open feature.

Drawers: heavy duty stainless steel with heavy duty drawer slides. Full extension drawers accommodate: 27" & 60" models (1) 12" x 20" x 6" deep pan per drawer / 48" x 72" models (1) 12" x 18" x 6" deep box or (1)-1/2 & (1)-1/3rd pan (pans and box sold separately).

Doors and Drawers: openings have a plastic breaker strips to retard condensate formation. Provided with magnetic door/drawer gaskets, removable without tools. Recessed full length handles.

Units come complete with a 2" Ecomate CFC. Free polyurethane insulation, foamed in place.

#### Refrigeration system

Self-contained capillary tube system using environmentally friendly (CFC Free) R-290 refrigerant. Side mounted compressor on right side for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow. Refrigerators are designed to maintain temperatures between 33 °F to 38 °F.

#### Shelving


(2) Epoxy coated shelving per door with channel slides for supports. Adjustable in 2" increments per shelf. Drawers come standard with (2) pan dividers.

#### Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p). Standard with 5" diameter casters, front two with brakes.

#### Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

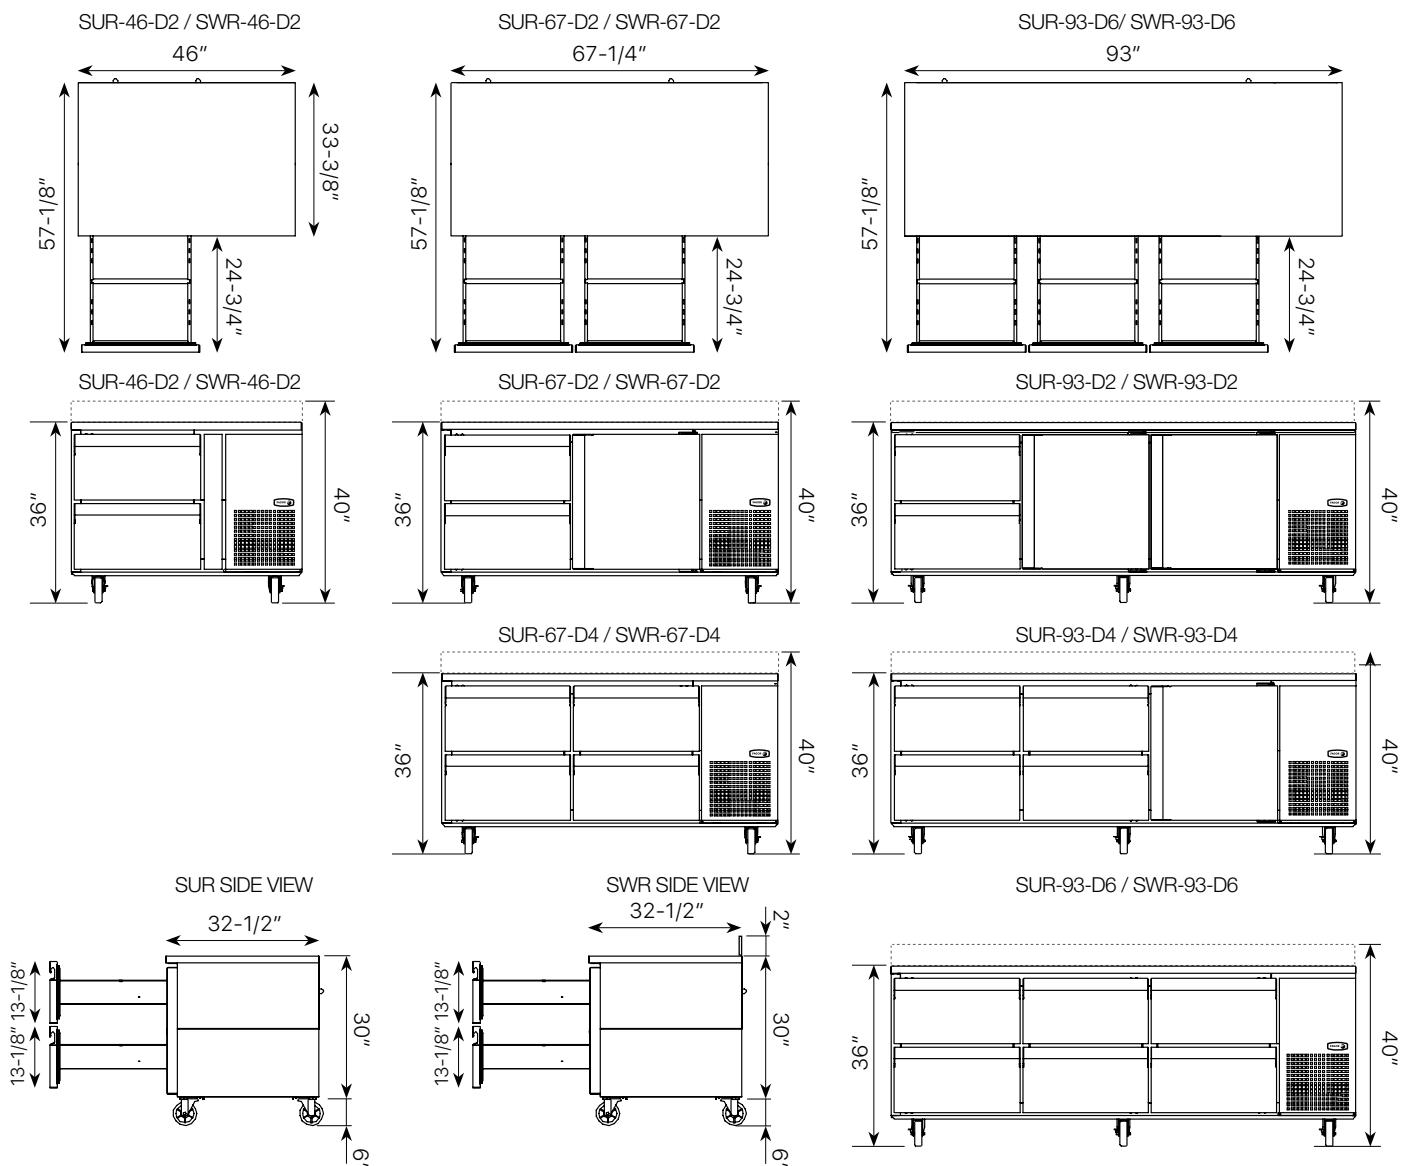

The manufacturer reserves the rights to modify materials and specifications without notice.