ICB TF 1.5 Gal PE, 120/240V SST

Height: 34.0" Width: 12.1" Depth: 23.8" (86.4cm) (30.7cm) (60.5cm)





- Produce fresh cold brew in minutes with the new Cold Brew mode, enabling operators to brew an on-demand batch of concentrate or ready-to-drink cold brew quickly and consistently with operational ease
- Add Bubble Tea to the menu with the new Bubble Tea Kit (54165.1018)
- Intuitive 4.3" touchscreen with user interface provides an enhanced experience when operating and programming the brewers
- The Infusion Series® Platinum Edition relies on the powerful duo of the Peak Extraction Sprayhead and SmartWAVE® technology to further enhance the uniformity of extraction and resistance to limescale buildup.
- Platinum Edition SmartWave technology delivers a timed air purge at the end of the brew cycle, removing residual water from the sprayhead, reducing lime build up and ultimately extending the life of the equipment
- Digital readout displays in English, Spanish, or French ---for easier programming and control
- Energy-saver mode reduces tank temperature during idle periods
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- ICB TF 54300.0101 is compatible with new TF 1.5-gallon ThermoFresh® Servers (with Base), all previous generations of TF 1.5-gallon TF Servers (with Base), Titan® 1.5-gallon servers, and Airpots
- Optional BUNNlink® remote monitoring support (kit required)

Agency:





Specifications

Product #: 54300.0101 Funnel: Smart Funnel

Water Access: Plumbed Faucet: Side

Interface: Wireless Legs: 4" Satin Nickel Legs

Finish: Stainless

Additional Features

Funnel Locks

Electrical & Capacity

12				Yes/						
V	olts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI		kPa	Fitting Supplied	Water Flow Required (GPM)				
	20-90	138-621	3/8" Male Flare Fitting	1.00				


CAD Drawings


2D	Revit	KLC
•	•	•


MARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.



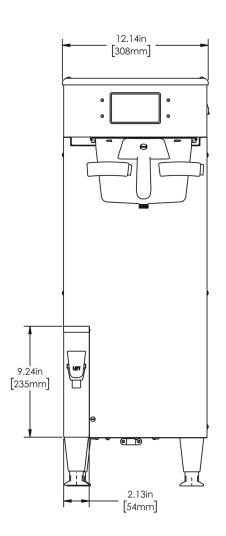

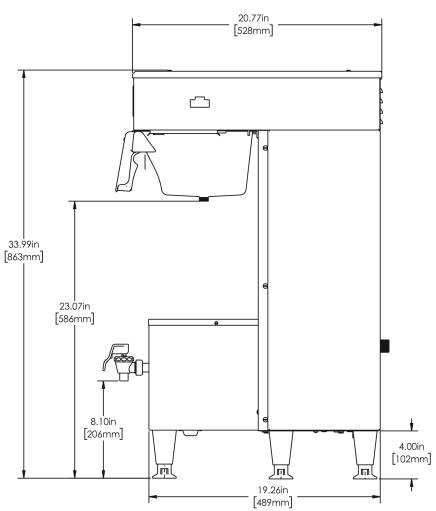

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	34.0 in.	12.1 in.	23.8 in.	36.5 in.	16.9 in.	29.5 in.	66.000 lbs	10.518 ft ³	
Metric	86.4 cm	30.7 cm	60.5 cm	92.7 cm	42.9 cm	74.9 cm	29.938 kgs	0.298 m³	



Related Products & Accessories: ICB TF 1.5 Gal PE, 120/240V SST(54300.0101)



























Serving & Holding Options: ICB TF 1.5 Gal PE, 120/240V SST(54300.0101)



TF SERVER, 1G DSG GEN3

Product #:42700.0200



TF SERVER, 1G DSG GEN3 NOBASE

Product #:42700.0250



TF SERVER, 1.5G DSG GEN3

Product #:42750.0200



TF SERVER, 1.5G DSG GEN3 NOBASE

Product #:42750.0250



TF SERVER, 1G MECH GEN3

Product #:44000.0200



TF SERVER, 1G MECH GEN3 NOBASE

Product #:44000.0250



TF SERVER, 1.5G MECH GEN3

Product #:44050.0200



TF SERVER, 1.5G MECH NOBASE GEN3

Product #:44050.0250

