BACK BAR EQUIPMENT

Model: **BB69NSSGDPT**

Natural Refrigerant R-290 Model

69" Back Bar Display Pass-Thru Cooler with Hinged Glass Doors

Stainless steel exterior, countertop, interior back and side panels with reinforced stainless steel floor.



Options and Accessories

(upcharge and lead times may apply)	
Additional epoxy coated shelves	Condensing unit on right
Stainless steel shelves	Wine rack
Food storage rated stainless steel interior (NSF-7)	Casters or legs
Riser base* (field installed)	Shallow depth
Solid doors (consult factory)	
Sliding glass doors (consult factory)	

Consult factory for other model configurations, options and accessories. * Adding a Riser Base increases overall height 2"

* Adding a Riser Base increases overall height 2"



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance rated front breathing refrigeration system Natural, environmentally safe,

high efficiency R-290 refrigerant¹ Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation Front, rear and side venting louvered grills Double pane, tempered low emissivity hinged glass doors Magnetic snap in door gaskets Cylinder keyed security lock in each door Stainless steel reinforced threshold

MODEL FEATURES

Low profile cabinet design
Electronic controller with digital display & hi-low alarm
LED interior lighting
Off-cycle defrost
Easily accessible and serviceable slide-out condensing unit

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

Model Plan Views

DIMENSIONAL DATA	
Net Capacity (cubic feet)	26 (736 cu l)
Width, Overall (inches)	69 (1753 mm)
Depth, Overall (inches) (including handles)	30 ¼ (768 mm)
Depth, Body Only (inches) (less doors)	25 (635 mm)
Height, Overall (inches)	34 ¾ (883 mm)
Capacity: # Barrel Kegs	3
Capacity: # Straight Wall Kegs	3
Capacity : # 1/6 Size Kegs	12
Number of Doors	4
Number of Shelves	4

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4
Capacity (BTU per hour)*	2250

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	3.7 (3.4)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Weight (pounds)	445 (202 kg)
Height - Crated (inches)	46 (1168 mm)
Width - Crated (inches)	78 (1981 mm)
Depth - Crated (inches)	42 (1067 mm)

* Rating @ +25°F evaporator, 90°F ambient


Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Toll-Free: 800-523-7138 Phone: 215-244-1400

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

esigned and

Fax: 215-244-9579






Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

69" (1753 mm) 0000000 53 7/16" (1357 mm) 34 3/4" 28 11/16" (883 mm) 19 3/16' ſG I) (729 mm) (487 mm)]000000000 000000000

FRONT VIEW

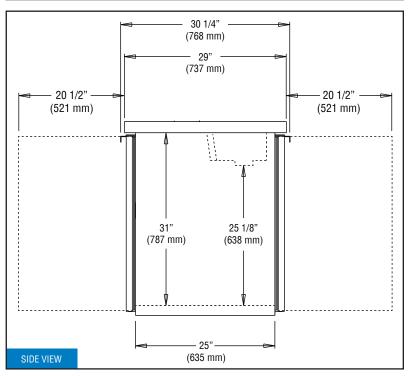

IMPORTANT NOTE: Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front and back of the cabinet **must** not be obstructed in any way. A clearance of 3" on the sides is recommended.