



**LEGEND™**

# Heavy Duty Refrigerated Glycol Batter Holding Prep Table

Item No. \_\_\_\_\_

Project \_\_\_\_\_

Quantity \_\_\_\_\_



Model PC-18-SC shown with optional casters

**SHORT/BID SPECIFICATION**

Batter Holding Prep Table shall be a Montague Legend Refrigerated Glycol Holding table:

- PC-18-\_\_** [Specify: **R** = Remote Refrigeration (condensing unit by others) or **SC** = Self Contained Refrigeration Package]
- PC-36-\_\_** [Specify: **R** = Remote Refrigeration (condensing unit by others) or **SC** = Self Contained Refrigeration Package]

...heavy-duty high performance refrigerator base with a glycol cooled rail, comprised of 304 S/S wrapped refrigeration lines immersed in glycol reservoir cooling for efficient proximity cooling and temperature transfer, 304 Stainless steel front, sides, bottom back, and top rail, Digital Thermometer, with 2" (51mm) thick foamed in place, environmentally friendly, Non GWP, Non ODP, Kyoto Protocol compliant, polyurethane foam and 6" (152mm) high stainless steel height-adjustable legs standard; plus all the features listed and options/accessories checked:

**BATTER HOLDING PREP TABLE PACKAGE FEATURES:**

- SC Self-Contained Model:**
  - Energy efficient hermetic compressor/condenser system
  - Coated evaporator coil powered by Turbo Coil
  - Condenser coil screen- Removable and washable
  - Digital thermostat temperature controlled
  - 6' (1829mm) power cord with grounded NEMA plug
  - Five year parts and labor warranty on Turbo-Coil coated evaporated coil
  - Three year standard parts and labor warranty
  - Five year parts and labor warranty on Compressor
- R Remote Model:**
  - Fully assembled, expansion valve, solenoid and thermostat
  - Digital thermostat temperature controlled
  - Three Year standard parts and labor warranty
  - 6" (153mm) power leads with field access junction box
  - Refrigeration, and electric connection will be stubbed out as specified:  **LE** left-end,  **RE** right-end,  **BL** back-left,

Self-Contained MODEL GUIDE				
Model Number	Unit Width Inches (mm)	Holding Cups		
		7"DIA x 9"deep	5 1/4"DIA. X 9"deep	
PC-18-SC	18" (457)	2	1	
PC-36-SC	36" (914)	4	2	

Remote Refrigeration MODEL GUIDE				
Model Number	Unit Width Inches (mm)	Holding Cups		
		7"DIA x 9"deep	5 1/4"DIA. X 9"deep	
PC-18-R	18" (457)	2	1	
PC-36-R	36" (914)	4	2	

**COLD RAIL SYSTEM FEATURES:**

- 304 Stainless Steel Exterior Top, Sides and Front.
- 304 S/S wrapped refrigeration lines immersed in glycol reservoir cooling for efficient proximity cooling and temperature transfer

**STANDARD BASE CONSTRUCTION:**

- All welded construction
- 304 Stainless Steel front, top & sides, back & bottom
- Digital thermometer
- 2" (51mm) thick environmentally friendly, Non Ozone Depletion Potential, Non Global Warming Potential, high density polyurethane foam insulation
- 6" (152mm) height-adjustable stainless steel legs standard

**AGENCY APPROVALS**

- UL Classified EPH-STD NSF-7
- UL Listed



RF-8 [Rev.1/18]

# LEGEND™ Heavy Duty Refrigerated Glycol Batter Holding Prep Table


Item No. \_\_\_\_\_

Project \_\_\_\_\_

Quantity \_\_\_\_\_

## Batter Holding Prep Tables

Dimensions in brackets are millimeters

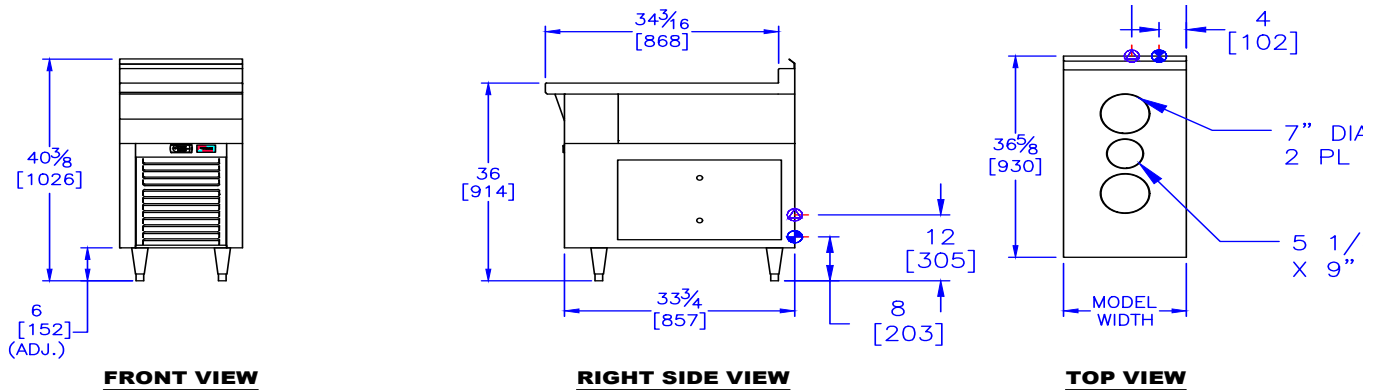

### OPTIONS GUIDE:

- 6" (152mm) diameter casters
- Curb mounting [Consult Factory]

### Custom Options (Consult Factory):

- Custom sizes & configurations
- Drop-in batter cup kit
- Left and right side heat shields
- Drop-in-place insulated night cover

### Remote Refrigerants:

- R-404A
- Other, consult factory

### INSTALLATION REQUIREMENTS & SHIPPING INFORMATION

1. Install in accordance to local codes

Minimum Clearances	Always Follow clearances of mounted equipment
From Back Wall	4" (101mm)
Right Side of SC Models	0"***

\*\*\*Consult Factory for custom installations and specific model configurations

Product to be pre-chilled to a minimum of 38°F. prior to use in this supplemental-cooking-equipment holding cabinet.  
 Full depth pan inserts recommended for optimal performance

Model:	Electrical Requirements							Shipping Weight	Shipping Class	Cube (Crated) ft <sup>3</sup> /m <sup>3</sup>
	Length Inches (mm)	HP*	Voltage	Phase	Amps	NEMA Plug	BTU's			
PC-18-R	18" (457)	—	115	1	1.2	N/A	1000	200 lbs (91 kg)	85	15/.4
PC-36-R	18" (457)	—	115	1	1.2	N/A	1420	250 lbs (113 kg)	85	32/.9
PC-18-SC	36" (914)	1/3	115	1	6.8	5-15P	840	300 lbs (136 kg)	85	17/.5
PC-36-SC	36" (914)	1/3	115	1	6.8	5-15P	1240	390lbs (177kg)	85	32/.9

\*HP = Motor Horsepower

Due to continuous product improvements, specifications are subject to change without notice.



## THE MONTAGUE COMPANY

1830 Stearman Avenue, Hayward, CA 94545  
 800 345-1830 · Fax: 510 785-3342  
 www.montaguecompany.com



RF-8 [Rev. 1/18]