 REFRIGERATOR MANUFACTURER Turbo air more durable, efficient, beautiful	4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com	Project:	
		Model #:	
		Item #:	
		Available W/H:	Qty:
		Approval:	
		AIA #:	SIS #:
		CSI Section 11400	

Roll-Through Glass Door Heated Cabinet Roll-Through PRO Series

Model : PRO-50H-G-RT

≡ FEATURES & BENEFITS ≡

- **Digital temperature control & monitor system**

 - Keeps food products safe by maintaining constant temperatures
 - Alarm beeps when doors are not sealed
 - Early warning alarm program detects issues before malfunction occurs
 - Digital display allows for easy monitoring
 - Sensitive touch display

- **Ducted fan air distribution system**

Maintains temperature within the food zone

- **On/Off switch**

ON/OFF switch is located on control panel

- **All stainless steel cabinet construction**

The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

- **High-density polyurethane insulation**

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- **LED interior lighting**

Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.

- **Full length stainless steel solid doors with glass window**

- **Self-closing doors with stay open feature at 120 degrees**

- **Heated cabinet holds 140°F ~ 180°F for the best in food preservation**

- **Lifetime guaranteed heavy duty hinges and handles**



Model	Swing Door	CU./FT.	#of Rack Accepted	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D [†] x H [†] (inches)
PRO-50H-G-RT	2	80.82	2	3000	15	876	667/8 x 401/8 x 841/4


Ver.20230608 Printed in U.S.A.

[†] Depth does not include 2-5/8" for door handles. Depth does not include 6-7/8" for ramps.

Roll-Through Glass Door Heated Cabinet

Roll-Through
PRO Series

Model : PRO-50H-G-RT

ELECTRICAL DATA	
Voltage	208~230V/115V/60Hz/1Ph
Plug Type	 NEMA L14-20P
Full Load Amperes	15
Wattage (W)	3000
Feed Wires with Ground	4
Cord Length (ft.)	8
DIMENSIONAL DATA	
# of Doors	2
# of Racks Accepted	2
Net Capacity (cu. ft.)	80.82
Ext. Length Overall (in.)	66 ⁷ / ₈ (1700mm)
Ext. Depth Overall (in.)	40 ¹ / ₈ (1020mm)
Ext. Height Overall (in.)*	84 ¹ / ₄ (2140mm)
Int. Length Overall (in.)	58 (1474mm)
Int. Depth Overall (in.)	35 ³ / ₈ (900mm)
Int. Height Overall (in.)	66 ⁷ / ₈ (1699mm)
Rack Size (L x D x H) (in.)	27 x 29 x 66
Net Weight (lbs.)	818
Gross Weight (lbs.)	876

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2-5/8" for door handles. Depth does not include 6-7/8" for ramps.


■ WARRANTY : 3 Year Parts and Labor Warranty

■ STANDARD FEATURES


- Door locks standard
- Solid and sturdy grille design
- Heavy duty stainless steel ramp standard

PLAN VIEW

(unit : inch)

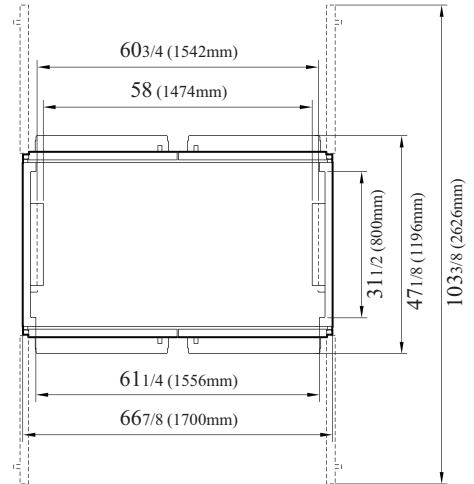

TOP VIEW

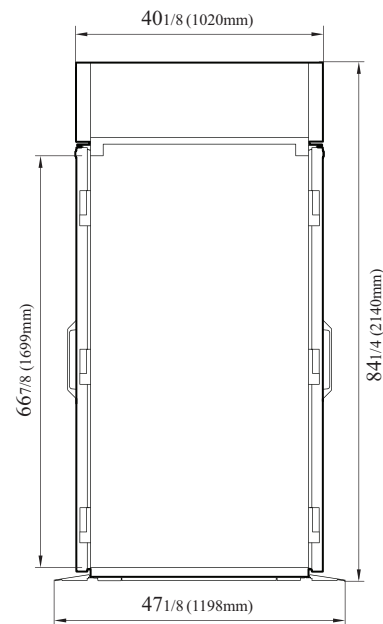

SIDE VIEW

Ver.20230608



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

REFRIGERATOR MANUFACTURER
Turbo air

GERMAN
KNIFE

||| **RADIANCE**

REFRIGERATION SYSTEM
Turbo air

TEXAKING

Continued product development may necessitate specification changes without notice.