

## Refrigeration Equipment 3-Solid Door Back Bar Refrigerator Black 73" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738271 (KCHBB72S)

3-Solid Door Back Bar  
Refrigerator Black 73" Long

### Short Form Specification

**Item No.** \_\_\_\_\_

3-door Back bar refrigerator. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.  
ETL Safety and Sanitation certified.  
3/5 Years warranty.

### Main Features

- External digital temperature display.
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

### Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


### Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

### Optional Accessories

- Three Shelves for 72" Back Bar PNC 880610   
(1 Right, 1 Left, & 1 Middle)
- Shelf clips (4-pack) PNC 880611
- Middle Shelf for 72 back Bar PNC 880620   
(Solid & Glass Door)

APPROVAL: \_\_\_\_\_

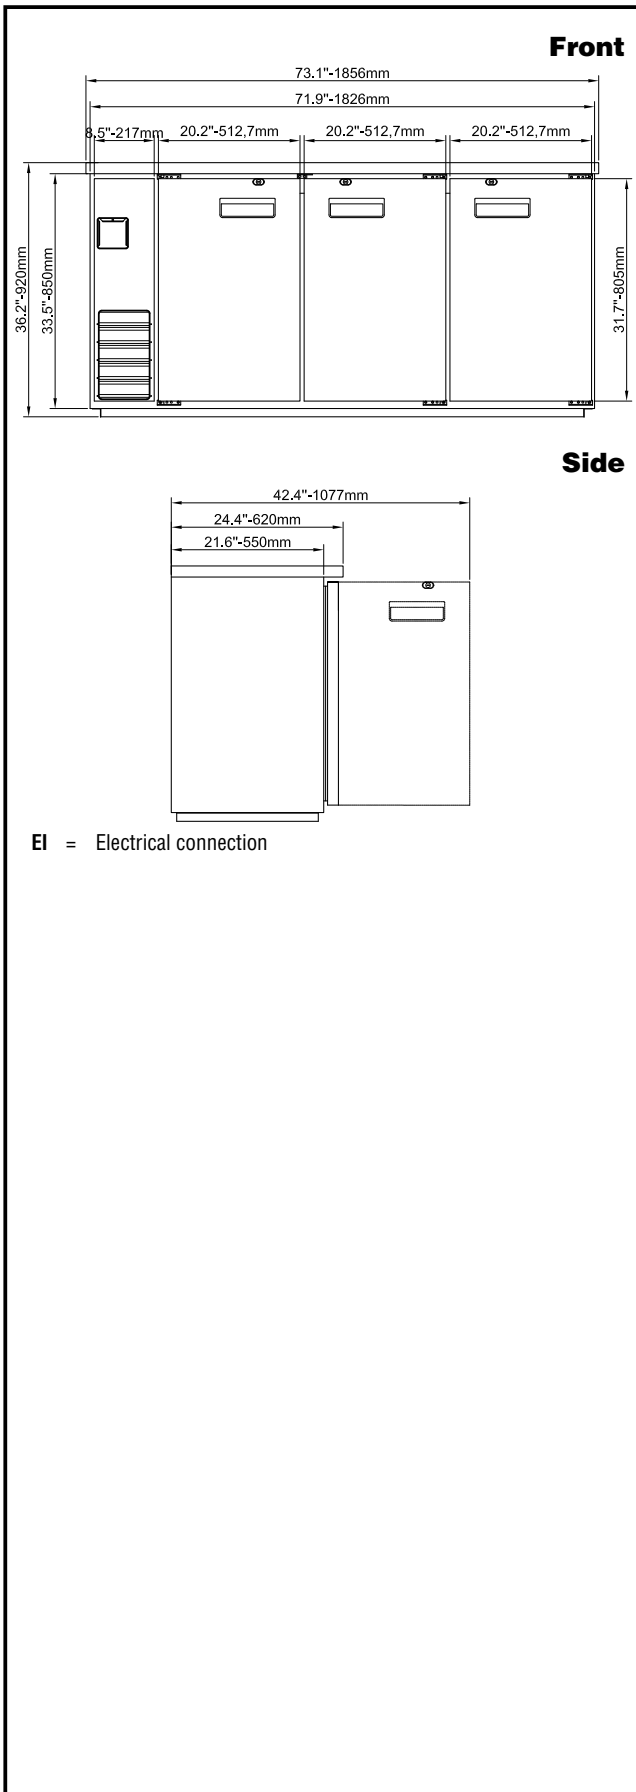

## Electric

<b>Supply voltage:</b>	115 V/1 ph/60 Hz
<b>738271 (KCHBB72S)</b>	
<b>Electrical power, max:</b>	0.31 kW
<b>Plug type:</b>	USA NEMA 5-15P

## Capacity:

<b>Gross capacity:</b>	20.8 cu.feet
------------------------	--------------

## Key Information:

<b>Door hinges:</b>	1 Left+2 Right
<b>External dimensions, Width:</b>	73 1/16" (1856 mm)
<b>External dimensions, Depth:</b>	24 7/16" (620 mm)
<b>External dimensions, Height:</b>	36 3/16" (919.48 mm)
<b>Number and type of doors:</b>	3 Full
<b>Internal Dimensions (depth):</b>	20 " / (508 mm)
<b>Internal Dimensions (height):</b>	28 " / (711.2 mm)
<b>Internal Dimensions (width):</b>	60 " / (1524 mm)
<b>Shipping height:</b>	41 5/16" (1050 mm)
<b>Shipping weight:</b>	337 lbs (153 kg)
<b>Shipping volume:</b>	47.8 ft <sup>3</sup> (1.35 m <sup>3</sup> )
<b>Number and type of grids (included):</b>	6 - Vinyl-Coated Steel
<b>Type of external material:</b>	Black Prepainted Steel
<b>Type of internal material:</b>	Stainless Steel
<b>Warranty:</b>	3 / 5 years
<b>Approvals</b>	ETL C&US;ETL SANITATION

## Refrigeration Data

<b>Compressor power:</b>	1/5 hp
<b>Operating temperature min.:</b>	32 °F
<b>Operating temperature max.:</b>	41 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost

## Sustainability

<b>Current consumption:</b>	3 Amps
<b>Refrigerant type:</b>	R290
<b>GWP Index:</b>	3
<b>Refrigerant weight:</b>	130 g



### Refrigeration Equipment 3-Solid Door Back Bar Refrigerator Black 73" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.