

Champion®

The Dishwashing Machine Specialists

PROJECT: _____

ITEM # _____ QTY: _____

MODEL # _____

AIA # _____ SIS # _____

UL 130

UNDERCOUNTER LOW TEMPERATURE



Rendered image is for general visual representation only. Please refer to specifications for the latest detailed product information.

OPTIONS & ACCESSORIES

- Additional Dish Racks
 - Peg
 - Flat
- 17" Stand Stainless Steel
- 8" Leg Stand
- 1" Roller Kits available (includes 4 casters)
- NEW Champion ION scale prevention system
- Chemical alarm kit (mounted)

STANDARD FEATURES

- **Wash Refresh™**
Automatically drains the water for the next cycle, ensuring heavily soiled items are always sanitized with new wash water
- **Pumped Drain**
- **Stemsure™**
Soft start to protect glasses and dishes from chipping and breaking
- **Door Safety Switch**
- **Low-Water Tank Heat Protection**
- **Built-In Detergent, Rinse-Aid, And Sanitizer Dispensing Pumps**
- **Wash Pump, 1 HP Motor**
- **Electric Tank Heater**
- **Upper & Lower Interchangeable Wash/Rinse Spray Arms**
- **316 Stainless Steel Tank**
for improved corrosion resistance, an industry exclusive, all 130, 230 and 330 tanks are stainless steel
- **Top Mounted Controls**
- **Stainless Steel Top And Side Panels**
- **Single Phase Connection**
- **Stainless Steel Construction**
- **115v Power Cord**

UNDERCOUNTER LOW TEMPERATURE

SPECIFIER STATEMENT

Specified unit will be Champion model UL-130 undercounter low temperature dishwashing machine with built-in detergent, rinse-aid, and sanitizer dispensing pumps. Features 141 second total cycle, 1 Hp pump motor, fill and dump, pumped drain. Constructed of stainless steel.

1 year parts and labor warranty.

Note: Vent hood is not recommended, as unit does not produce excessive steam.

Note: Always follow local building code guidelines.



In the USA:

3765 Champion Blvd, Winston-Salem, NC 27105
Tel: (336) 661-1556 Fax: (336) 661-1979
www.championindustries.com

In Canada:

2674 N. Service Rd., Jordan Station, Ontario, Canada LORISO
Tel: (905) 562-4195 Fax: (905) 562-4618
www.championindustries.com/1canada

SPECIFICATIONS

Capacities

Racks per hr. 25

Motor Horsepower

Wash 1

Water Consumption

U.S. Gal per hr. (max. use) 32

U.S. Gal. per rack 1.5

Temperature °F

Wash 120°F Min (140°F recommended)

Rinse 120°F Min (140°F recommended)

Heating

Tank heat, electric, (kW) .75

Time Cycle in seconds

Wash 90

Rinse 25

Drain/fill 27

Total Cycle 142

Standard 20" x 20" Rack Complement

Dish 1

Open 1

	Uncrated	Crated
Height*	33-3/4"	39-1/2"
Width	24"	25"
Depth	25"	25-1/2"
Ship Wt. LBS.	153	173

* Front leveling feet provided

Utilities

1 Electrical

115/60/1; 12-amp draw; to be fused at 15 amp. 4 ft. plug-in cord supplied.

2 Water Connection

120°F minimum hot water connection (140°F recommended) 6 ft. long, 1/2" I.D. flexible fill hose with 3/4" garden hose connector. Flow pressure: 25-95 psi.


3 Pumped Drain

5/8" I.D. flexible reinforced hose, 6 ft. long.

Max. drain flow 15 US gpm.

Max. drain height 3 ft.

Complies with ANSI/ASSE 1440 Sections 1.4.3 & 1.4.4

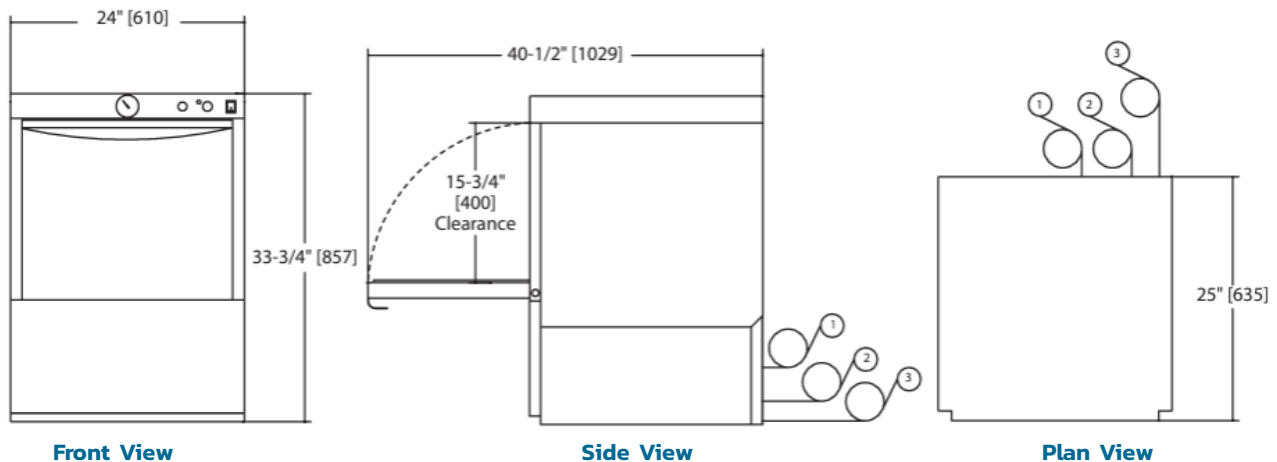

In the USA: 3765 Champion Blvd, Winston-Salem, NC 27105 | Tel: (336) 661-1556 Fax: (336) 661-1979 | www.championindustries.com

In Canada: 2674 N. Service Rd., Jordan Station, Ontario, Canada LORISO | Tel: (905) 562-4195 Fax: (905) 562-4618 | www.championindustries.com/1canada