

SERVING STATIONS

1/4" thickness. Provided with 3" x 1.25" surface mount flanges.

SERVING LINE BREATH GUARD BENT MODELS RSB-DTSSNA

SHORT FORM SPEC: Randell designer series breath guard with bent corners. Double-tier, single sided, non-adjustable design for self service. Framework is constructed of 1" diameter stainless steel tubing with #4 "satin" finish. All glass panels shall be tempered with 1" radius corners and polished edges. Front and top panels utilize 3/8" thickness, end panels utilize

Designer series bent-corner breath guard: Double-tier, Single-sided, Non-adjustable front. Designed for self-service applications.

	\sim
	PROJECT NAME:
	LOCATION:
	ITEM NO:
	QTY:
	MODEL NO:
	AIA NO:
	SIS NO:
11400	CSI SECTION:

Certifications:



AVAILABLE MODELS:

RSB-DTSSNA-24 RSB-DTSSNA-30 RSB-DTSSNA-36 RSB-DTSSNA-48 RSB-DTSSNA-60 RSB-DTSSNA-72 RSB-DTSSNA-86

NSF LISTED FINISH:

- Stainless steel #4 finish
- Other finishes available (contact factory)

GLASS:

- Standard side glass is 1/4" tempered
- Standard top and front glass is 3/8" tempered (additional leg set required after reaching 66" maximum top glass length)

ORIGIN OF MANUFACTURE:

Designed and manufactured in the United States.

BREATH GUARD LENGTH GUIDE:

Unit Length	Center Line Length	Overall Length
24"	21.25"	23.75"
30"	27.25"	29.75"
36"	33.25"	35.75"
48"	45.25"	47.75"
60"	57.25"	59.75"
72"	69.25"	71.75"
86"	83.25"	85.75"

OPTIONS/ACCESSORIES:

LED lighting

Heatlamp

Combination: LED lighting and heatlamp

Dimension modification (Consult factory)

Alternative tubing finish (Consult factory)

ADDITIONAL RESOURCES:

Request A Quote

Sales Tools


Find A Rep

Serving Stations SP SHT1743 RevB 06/23



47.75"

28.125" -

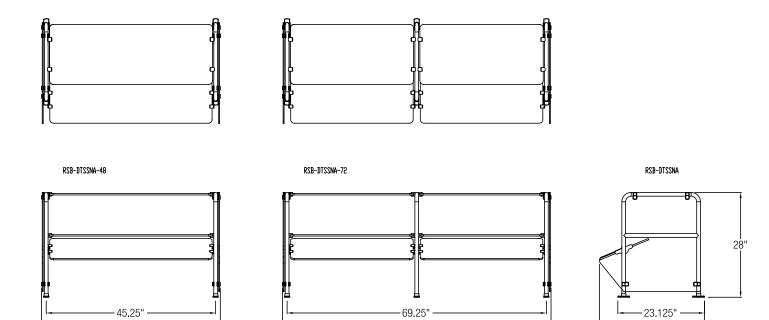

-71.75"



888-994-7636, unifiedbrands.net