
TAG:



Easy Install Pre-Rinse Unit

Architect/Engineering Specifications:

8" deck mount mixing faucet with polished chrome plated brass body, 24" riser, 44" flexible stainless steel hose with heat resistant handle, 1.07 GPM spray valve, compression cartridges with spring checks, lever handles, 1/2" NPT female inlets, 6" adjustable wall bracket, spray valve holder, and overhead spring. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 & NSF 372. EPAct 2005 compliant.

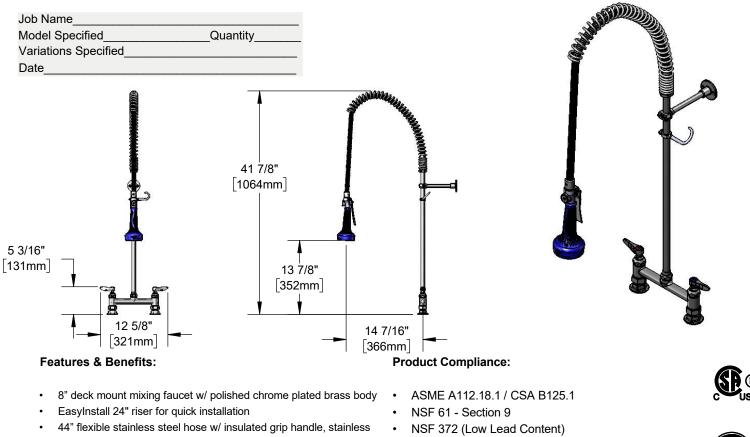

- steel trigger and trigger lock 1.07 GPM JeTSpray spray valve w/ insulated grip handle,
- stainless steel trigger and trigger lock Quarter-turn Eterna compression cartridges with spring
- checks to prevent cross flow of water Lever handles w/ color coded indexes
- 1/2" NPT female eccentric inlets with Ø 2" flanges
- Adjustable centers from 7 3/4" to 8 1/4"
- 6" adjustable wall bracket
- Material: Polished chrome plated brass body, riser & spray valve body, stainless steel hose, and chrome plated metal handles

EPAct 2005 (PRSV)

Warranty: Three Year (Limited)

Performance Data:

- Pressure: 20 125 psi
- Temperature: 40 °F 140 °F
- Flow Rate: 1.07 GPM @ 60 psi

Optional Handles

Optional Cartridges With Checks

□ 4" Wrist Action □ Lever (Standard) □ 4-Arm

□ Quarter-Turn Cerama w/ Check Valve □ Quarter-Turn Eterna w/ Spring Check (Standard)

Optional Pre-Rinse Spray Valves

□ B-0107 (1.42 GPM) □ B-0107-C (0.65 GPM) □ B-0107-J (1.07 GPM) □ B-0108 (1.07 GPM) (Standard) □ B-0108-C (0.65 GPM)







