
TAG:	

Easy Install Pre-Rinse Unit

Architect/Engineering Specifications:

8" wall mount mixing faucet with polished chrome plated brass body, add-on faucet with ceramic cartridge and lever handle, 12" swing nozzle with 2.2 GPM VR aerator, 18" riser, 44" flexible stainless steel hose with swivel, 1.07 GPM spray valve with insulated grip handle, ceramic cartridges with check valves, lever handles, accessory fitting tee, 1/2" NPT female inlets, 6" adjustable wall bracket, spray valve holder and overhead spring. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. EPAct 2005 compliant.

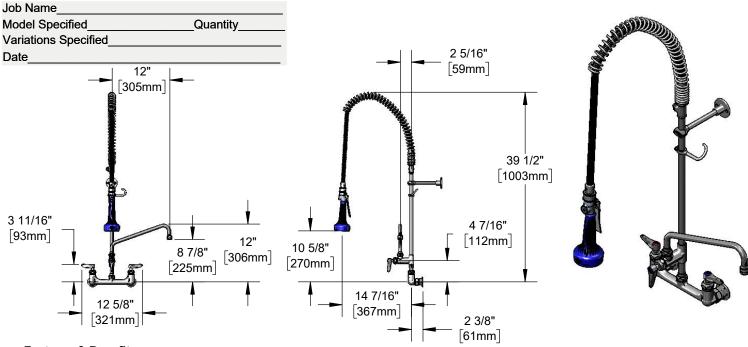

Features & Benefits:

- 8" wall mount mixing faucet w/ polished chrome plated brass body
- EasyInstall add-on faucet w/ polished chrome plated
- 12" swing nozzle w/ 2.2 GPM VR aerator, Series 6 (B-0199-06)
- 18" rigid riser
- 44" flexible stainless steel hose
- 1.07 GPM JeTSpray spray valve w/ insulated grip handle, stainless steel trigger and trigger lock
- Quarter-turn Cerama cartridges w/ check valves to prevent cross flow of water
- Pre-rinse swivel
- Lever handles w/ color coded indexes
- Accessory fitting tee
- 1/2" NPT female inlets with \emptyset 2" flanges
- 6" adjustable wall bracket
- Material: Polished chrome plated brass body, tubular nozzle, add-on faucet, riser & spray valve body, stainless steel hose and chrome plated metal handles

Optional Add-On Faucet Outlets (Series 1 / VR Series 6)

GPM	Aerated	VR Aerated (VR Laminar)
1.0	□ B-0199-01-F10	□ B-0199-06-F10
1.5	□ B-0199-01-WS	□ B-0199-06-WS
2.2	□ B-0199-01	Standard

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- EPAct 2005 (PRSV)

Warranty: Three Year (Limited)

Cerama Cartridge: Lifetime (Limited)

Performance Data:

- Pressure: 20 125 psi
- Temperature: 40 °F 140 °F
- Flow Rate:

Spray Valve: 1.07 GPM @ 60 psi Add-On Faucet: 2.2 GPM @ 60 psi

Optional Cartridges With Checks

- □ Quarter-Turn Cerama w/ Check Valve (Standard)
- □ Quarter-Turn Eterna w/ Spring Check

Optional Pre-Rinse Spray Valves Optional Handles □ B-0107 (1.42 GPM) ☐ 4" Wrist Action □ B-0107-C (0.65 GPM) □ Lever (Standard) □ B-0107-J (1.07 GPM) □ 4-Arm □ B-0108 (1.07 GPM) (Standard) □ B-0108-C (0.65 GPM)









