



# Water Appliance Connectors

## HW-4C-48VB



TAG:

SAFET-LINK Water Appliance Connector

### Architect/Engineering Specifications:

48" coated water connector hose (blue) with 1/2" NPT male outlet, 1/2" NPT female inlet, vacuum breaker and quick-disconnect. Certified to ASME A112.18.1 / CSA B125.1, NSF 61- Section 9 and NSF 372.

Job Name \_\_\_\_\_  
 Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_  
 Variations Specified \_\_\_\_\_  
 Date \_\_\_\_\_

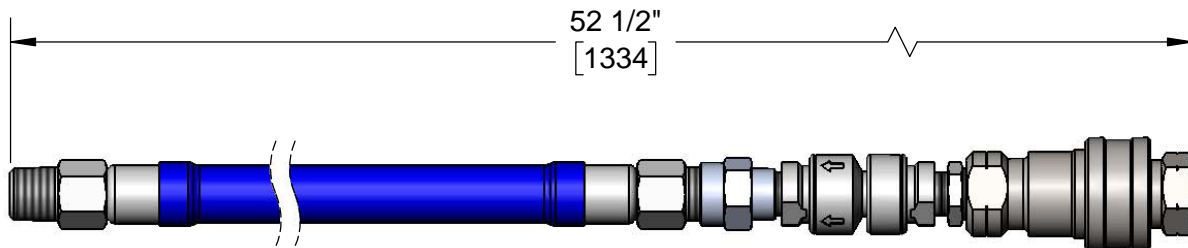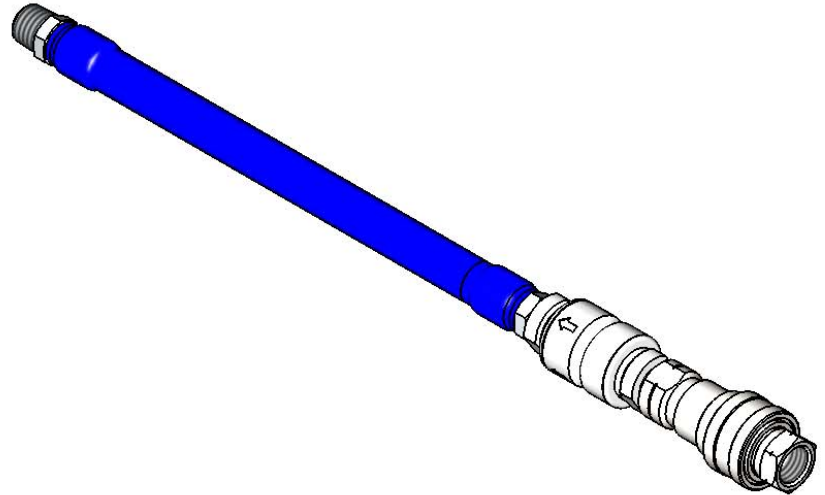

### Features & Benefits:

- 48" coated water connector hose (blue)
- 1/2" NPT male welded fitting ends
- 3/8" NPT vacuum breaker
- 1/2" NPT female quick disconnect
- 1/2" NPT male outlet
- 1/2" NPT female inlet
- Extruded coating
- Stainless steel braided hose
- Material: Extruded coated stainless steel braids

### Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- CSA B64.8 (VB)

**Warranty:** Five Year (Limited)

### Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 175 °F
- Flow Rate: 10.77 GPM @ 60 psi



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690  
 Ph 800-476-4103 • Fax 864-834-3518  
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 06/23/17