

KL10 MODEL WALK-INS WITH





Now with Capsule Pak ECO™ refrigeration system options

Features**

- Indoor models only
- Cooler and freezer models
- Freezer equipped with pressure relief port
- 7'4"H coolers and 7'7"H coolers and freezers
- With-floor models (coolers and freezers) and less-floor models (coolers)
- 26", 30" or 36" wide door (left or righthand)
- Matching Capsule Pak™ or Capsule Pak ECO™ refrigeration systems in 1/2, 3/4 and 1HP.
 1-1/2HP available for Capsule Pak systems only.
- Qualifies for flat rate freight program


To take advantage of 10-day lead time, please mention "KL10" when ordering. All orders are for immediate shipment.

See next page for available floor plans

- * 10-day lead time does not include shipping time.
- **Please note that KL10 models are offered only as noted above.

 Any deviation from these parameters will result in extended lead times. Other options offered on standard Kold Locker™ models do not apply.

Floor Plan Layouts

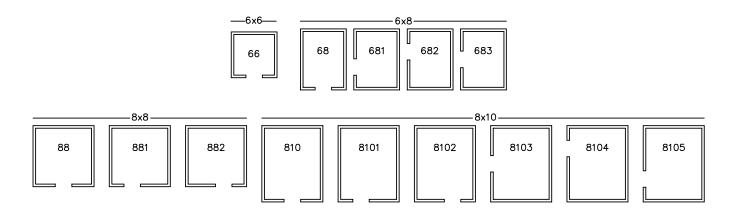

Matching Capsule Pak™ & Capsule Pak ECO™ Refrigeration Systems



- Designed for simple and fast installation, each system consists of a condensing unit and evaporator coil contained in a single housing
- Conveniently located on top of the walk-in to maximize available storage space
- Standard LogiTemp™ electronic controller for increased reliability
- Capsule Pak ECO systems built for maximum sustainability and energy efficiency with a significantly reduced Global Warming Potential of 3

| | -10°F FREEZER, 90°F AMBIENT | | | | +37°F to +38°F COOLER, 90°F AMBIENT | | | |
|-------------------------------------|-----------------------------|-------|---------------------------|-------|-------------------------------------|-------|---------------------------|-------|
| KL10 | MATCHING CAPSULE PAK™ | | MATCHING CAPSULE PAK ECO™ | | MATCHING CAPSULE PAK™ | | MATCHING CAPSULE PAK ECO™ | |
| MODEL | MODEL | BTUH* | MODEL | BTUH* | MODEL | BTUH* | MODEL | BTUH* |
| | | | | | | | | |
| 7' 4" HIGH | LESS FLOOR – INDOOR ONLY | | | | | | | |
| KL7466 | N/A | N/A | N/A | N/A | CPB050JC-S-O-EV | 4400 | CPB050PC-S-0 | 4100 |
| KL7468 | N/A | N/A | N/A | N/A | CPB050JC-S-0-EV | 4400 | CPB050PC-S-0 | 4100 |
| KL7488 | N/A | N/A | N/A | N/A | CPB075JC-S-4-EV | 6250 | CPB075PC-S-0 | 6700 |
| KL74810 | N/A | N/A | N/A | N/A | CPB075JC-S-4-EV | 6250 | CPB075PC-S-0 | 6700 |
| 7' 7" HIGH WITH FLOOR – INDOOR ONLY | | | | | | | | |
| KL7766 | CPF100JC-S-4-EV | 3500 | CPF075PC-S-0 | 2900 | CPB050JC-S-O-EV | 4400 | CPB050PC-S-0 | 4100 |
| KL7768 | CPF100JC-S-4-EV | 3500 | CPF100PC-S-0 | 4000 | CPB050JC-S-4-EV | 4400 | CPB050PC-S-0 | 4100 |
| KL7788 | CPF150JC-S-4-EV | 4509 | CPF100PC-S-0 | 2900 | CPB075JC-S-4-EV | 6366 | CPB075PC-S-0 | 6700 |
| KL77810 | CPF150JC-S-4-EV | 4509 | CPF150JC-S-4-EV** | 4509 | CPB075JC-S-4-EV | 6366 | CPB075PC-S-0 | 6700 |

^{*}BTUH calculated using 16 hour design runtimes on coolers and 20 hour design runtimes on freezers

^{**}CPF150JC-S-4-EV Capsule Pak model with R449A refrigerant used for this KL10 freezer size.



891 County Road U • Hudson, WI 54016 800-955-5253 • www.norlake.com









