

Soda Gun Jetter Installation Guide

1 to 4 gun unit

Installation of Soda Gun Jetter LLC products must meet all applicable codes and regulations Included in this kit:


- | | |
|--|---|
| (1) Soda Gun Jetter control box | (1) 3/8" Water Supply Shut Off Valve |
| (2) Soda Gun Jetter Tri-Mount holsters (4) for SGT-200 | (1) Push to Connect Tee (2) for SGT-200 |
| (25') Blue Water Supply Tubing (50') for SGT-200 | (1) Beverage Tubing Adapter |
| (20') Anti-Microbial Drain Tubing (40') for SGT-200 | (2) Splash Guards (4) for SGT-200 |

1. Mount control unit under the bar in close proximity of GFCI protected outlet and near center of soda guns.
2. Replace soda gun holsters and drain tubing with the new supplied Soda Gun Jetter Tri Mount Holsters.
3. Install supplied 3/8" drain tubing allow for ¼ inch fall for every foot of drain tubing. Use tie wraps to secure drain minimum 3" above the floor drain. Use water from soda gun to test drainage.
***Without proper drainage the system will not function as designed.**
4. Connect supplied ¼ inch blue tubing to the fitting on the bottom of the box. You must insure the tubing is firmly pushed into the connector to avoid possible leakage.
5. Install the tubing to the first soda gun holster area, (Preferably alongside the soda lines) if you are only installing 1 soda gun cut tubing and install to connector on bottom of holster (insure tubing is firmly pushed into connector) and proceed to step 7.
6. If two guns are used, install the supplied tee and cut a piece of tubing long enough to reach first holster from tee and connect tee to holster. (insure tubing is firmly pushed into connector)
7. Connect tubing to tee and run the tubing alongside the soda lines to the next holster and connect. Insure tubing is firmly pushed into connector.
8. Secure the tubing and drain hose using cable ties. Cable wall mounts may be used however they are not provided.
9. For 3 to 4 gun systems repeat steps 2 through 7 using the second fitting on the bottom of the box.

10. Connect beverage tubing from the filtered soda gun water supply.
For best results we recommend 3/8 beverage tubing.
11. Install supplied water shutoff valve in close proximity of the control box.
12. Install beverage tubing to stem adapter and plug into supply quick connect fitting located on the bottom left of the control box. Insure the adapter is firmly pressed into the connector.
13. Turn on water supply and check for any leaks in the control box and all the connection points.
14. Test system (see operation guide)
15. This unit comes preprogrammed with time set. (see operation guide to change)

Soda Gun Jetter LLC
137 Gaither Drive
Suite C
Mt. Laurel, NJ 08054

NEMA RATED
WATERPROOF
PANEL ENCLOSURE

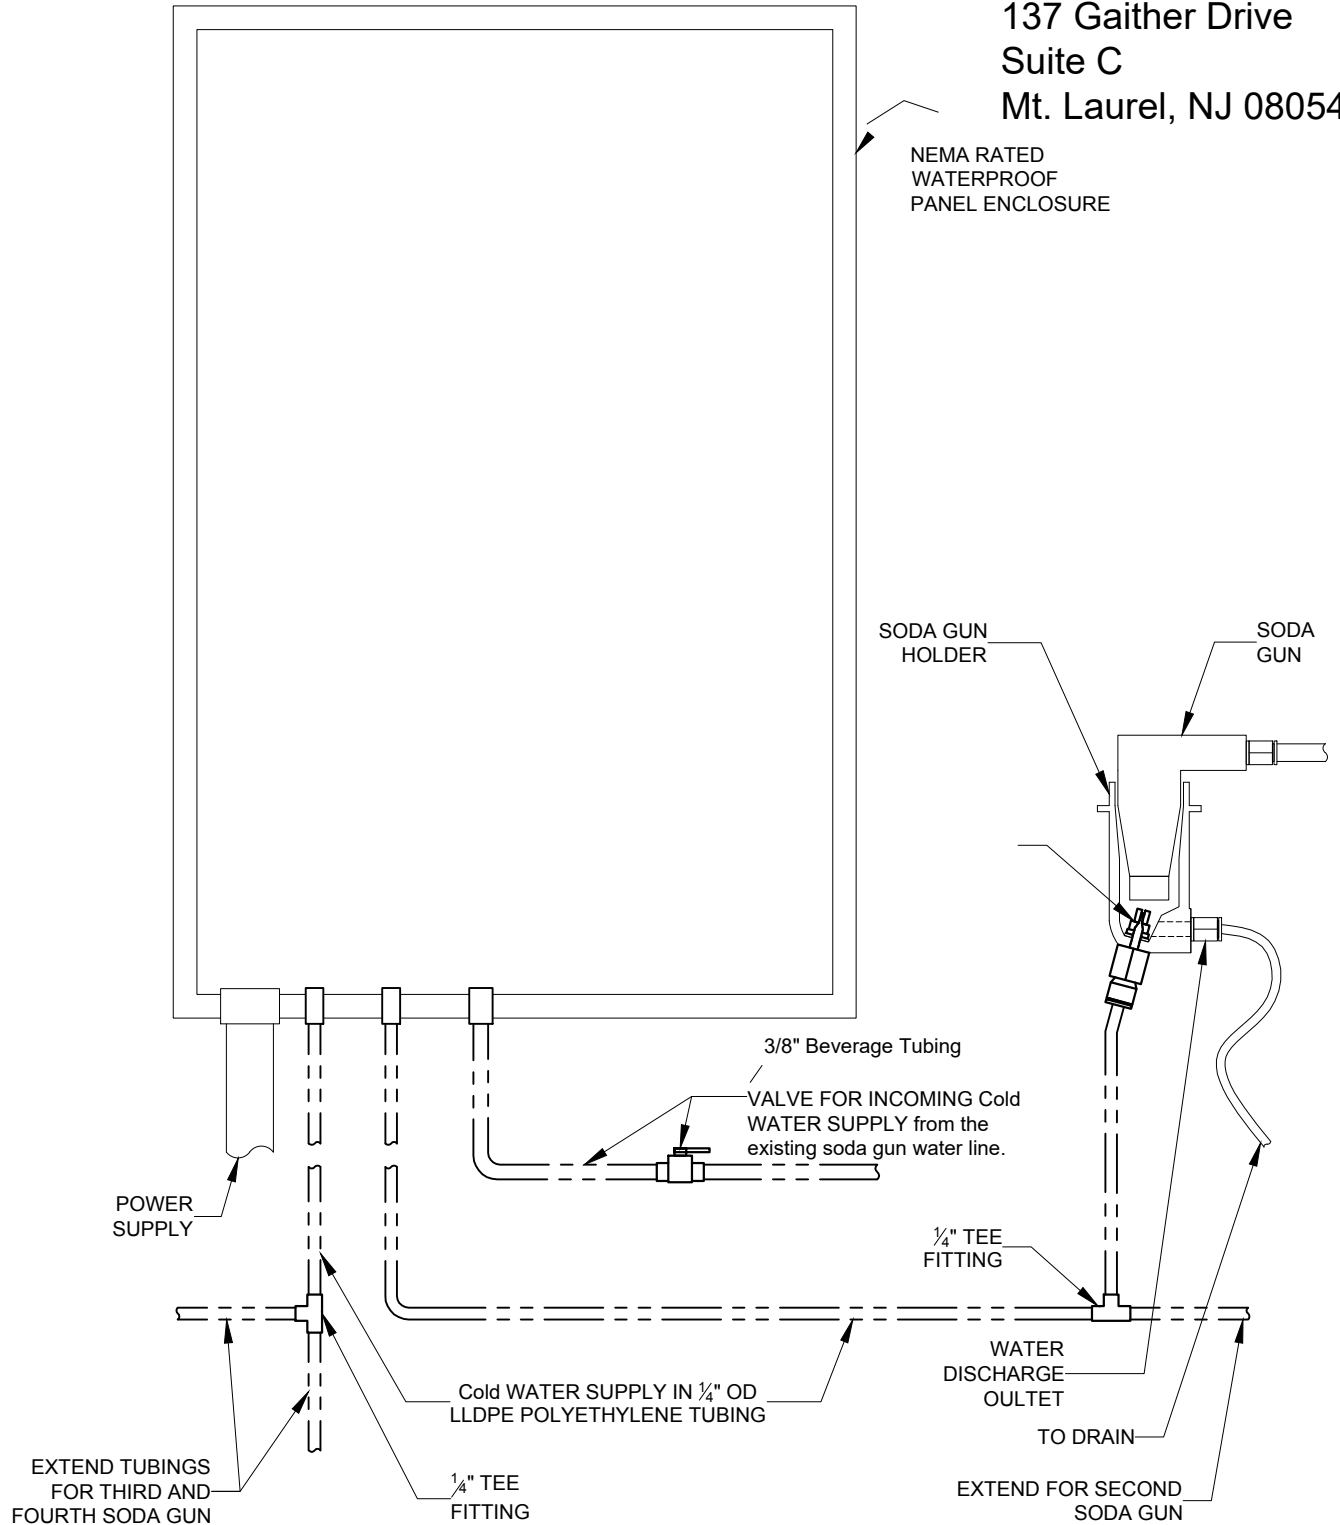

PLUMBING SCHEMATIC DIAGRAM - SODA/BAR GUN CLEANER
(TYP FOR 4 SODA GUNS)

NO SCALE