



The Legacy Companies
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331
 Sales: (954) 202-7419 • Sales@TheLegacyCompanies.com

Project Name: _____
 Location: _____
 Item #: _____ Qty: _____
 Model: _____

XC-30 / XC-30-T

POTATO & VEGETABLE PEELER- FLOOR TYPE

Blakeslee "No-Gear" peeler with 30-33lb capacity removes the thin outer skin of vegetables and saves all of the food value and flavor. Hand peeling wastes 20% of the vegetable and adds to your produce bills and labor cost. Includes a Stainless Steel Peel Trap. * The T in the model number indicates a TIMER is included with this model.

FEATURES

- Easy to clean
- Adjustable 5-minute
- Cast aluminum discharge chute
- Dual V-belt
- Motor and Drive unit sealed off against moisture to assure trouble free performance
- Stainless steel strainer basket
- Discharge can be directly in sink

CAPACITY

- 30lbs(14kg) - 33lbs(15kg) in 1-3mins
- Serves 90-100 people per cycle when potatoes are mashed in Blakeslee food mixer

CONSTRUCTION & FINISH

- Stainless steel unit
- Easy to clean aluminum hinged door
- Light weight molded polystyrene removable cover
- Adjustable peeling chamber for ease of use

DISCHARGE CHUTE

- Rust-proof and easy-to-clean aluminum
- Hinged door, no gasket, for fingertips is all that is required to open and close door
- Trough is in the discharge chute to catch seepage returning it to the machine
- Trough and door without a gasket eliminates problems of a gasket wearing out and water seeping past the door
- Self-closing door when released from open position
- Discharge chute is 37"(940mm) to 39.5"(1050mm) from floor based on adjustment of feet

MOTORS

- 3/4 HP
- 115-230v/60/1 or 208-220v/60/3
- Greased packed, ball bearing ventilated motor
- Cord and plug included



SWITCH & TIMER

- Moveable flush mounted toggle switch (3-ph)
- Timer range from 0 to 5 mins

DRIVE

- Dual V-Belt drive provides speed reduction between motor and abrasive peeling disc for efficient peeling action
- Standard size V-belt for easy replacement
- Adjustment and replacing of belt without dismantling machine
- Stainless steel drive shaft
- Design and construction machine and seal system insures water-tight drive area

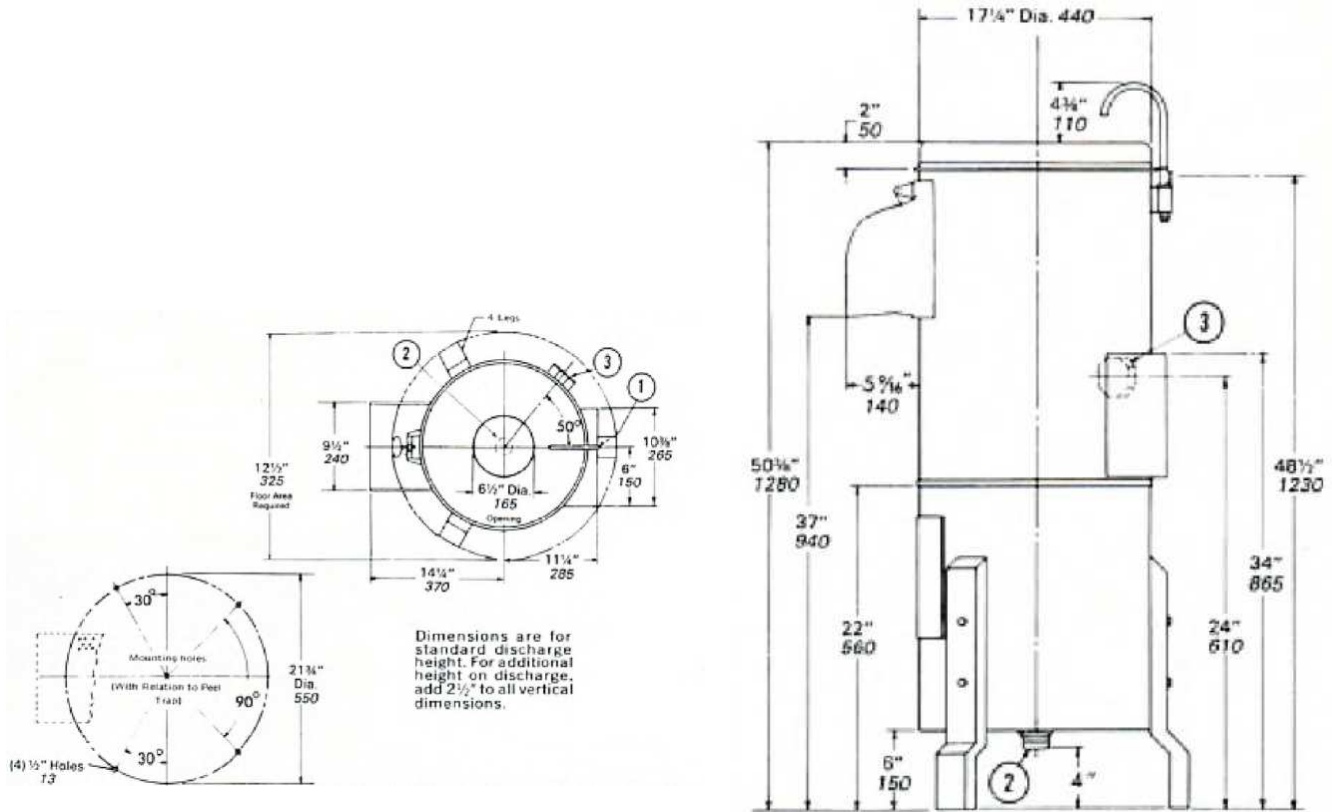
ABRASIVE DISC

- Rustproof cast aluminum abrasive peeling disc are included
- Abrasive carborundum is permanently cast into disc
- Light in weight for easy removal

PEEL TRAP

- Stainless steel peel trap strainer basket

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

POTATO & VEGETABLE PEELER- FLOOR TYPE


NO.	CONNECTION	FITTING	FUNCTION
1	Cold Water	1/2" (13mm) I.P.S	Peel Flushing Spray
2	Waste-Sewer	2" (50mm) N.P.T.	Cylinder Drain
3	Electrical	3/4 HP Motor	3- wire 3" (76mm) Electrical Box

General Notes

Model XC-30T- Furnished with 0 to 5 minute adjustable timer and a "hold" for continuous operation. (Single phase only)

Model XC-30- Furnished with "on and off" switch in lieu of timer (Single or 3 phase).

APPROXIMATE SHIPPING SPECIFICATIONS

MODEL	Domestic Crated	Export Boxed	Weight	Dimensions
XC-30	190lbs / 86kg	238lbs / 108kg	186lbs / 84kg	32"(813mm) x 29"(736mm) x 62" (1575mm)