ICB TF 1.0 Gal PE, 120/240V SST

Height: 25.2" Width: 12.1" Depth: 24.3" (64.0cm) (61.7cm) (30.7cm)



Server(s) sold separately

Specifications

Product #: 54300.0100 Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Funnel: Smart Funnel Faucet: Side Legs: 4" Satin Nickel Legs

 Produce fresh cold brew in minutes with the new Cold Brew mode, enabling operators to brew an on-demand batch of concentrate or ready-to-drink cold brew quickly and consistently with operational ease

- Add Bubble Tea to the menu with the new Bubble Tea Kit (54165.1018)
- Intuitive 4.3" touchscreen with user interface provides an enhanced experience when operating and programming the brewers
- The Infusion Series® Platinum Edition relies on the powerful duo of the Peak Extraction Sprayhead and SmartWAVE® technology to further enhance the uniformity of extraction and resistance to limescale buildup.
- Platinum Edition SmartWave technology delivers a timed air purge at the end of the brew cycle, removing residual water from the sprayhead, reducing lime build up and ultimately extending the life of the equipment
- Digital readout displays in English, Spanish, or French --- for easier programming and control
- · Energy-saver mode reduces tank temperature during idle periods
- · Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- Compatible with new TF 1.0-gallon Baseless ThermoFresh® Servers, all previous generations of TF 1.0-gallon Baseless TF Servers, and Airpots
- Optional BUNNlink® remote monitoring support (kit required)

Agency:





Additional Features

BrewWISE

Electrical & Capacity

| Volts* | Amps | Watts | Cord Attached | Plug Type | 8oz cups/hr 236ml cups/hr | Input H ² O Temp. | Phase | # Wires plus Ground | Hertz |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|------------------|-----------|------------------------------|---------------------------------|-------|------------------------|-------|
| 120/240 | 14.6 | 3500 | Yes/ | - | 163 | 60°F (15.5°C) | 1 | 3 | 60 |
| "When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings. | | | | | | | | | |

Plumbing Requirements

CAD Drawings

| | v | | U | | | |
|-------|------------------------------------------------|-------------------------|---------------------------|----|-------|-----|
| PSI | kPa Fitting Supplied Water Flow Required (GPM) | | Water Flow Required (GPM) | 2D | Revit | KLC |
| 20-90 | 138-621 | 3/8" Male Flare Fitting | 1.00 | • | • | • |


WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle



the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.



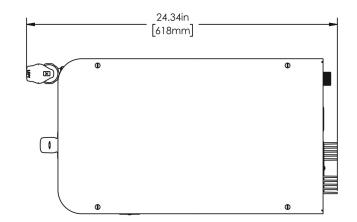

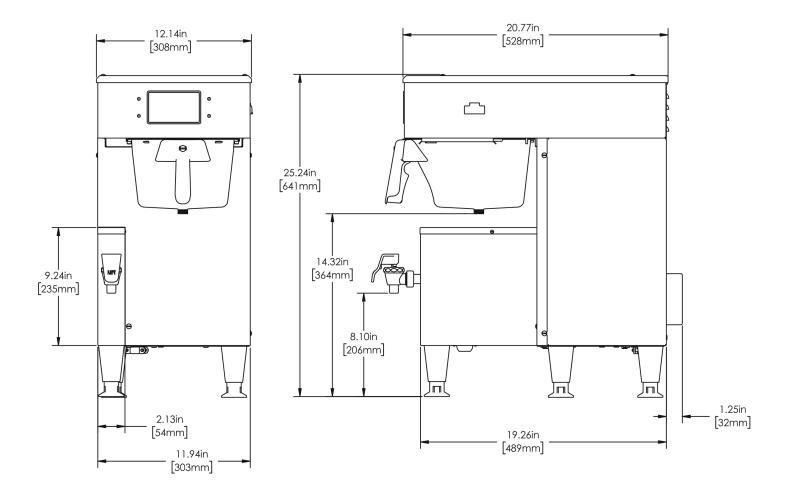

| | | Unit | | Shipping | | | | |
|---------|----------|----------|----------|----------|----------|----------|------------|-----------------------|
| | Height | Width | Depth | Height | Width | Depth | Weight | Volume |
| English | 25.2 in. | 12.1 in. | 24.3 in. | 30.8 in. | 17.5 in. | 26.7 in. | 63.000 lbs | 8.311 ft ³ |
| Metric | 64.0 cm | 30.7 cm | 61.7 cm | 78.1 cm | 44.5 cm | 67.8 cm | 28.577 kgs | 0.235 m³ |



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 04/07/2023

 For most current specifications and other info visit bunn.com.
 04/07/2023

Related Products & Accessories: ICB TF 1.0 Gal PE, 120/240V SST(54300.0100)





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Serving & Holding Options: ICB TF 1.0 Gal PE, 120/240V SST(54300.0100)

| TF SERVER, 1G DSG GEN3 | TF SERVER, 1G DSG GEN3 NOBASE | TF SERVER, 1.5G DSG GEN3 | TF SERVER, 1.5G DSG GEN3 NOBASE | TF SERVER, 1G MECH GEN3 |
|-----------------------------------|----------------------------------|-------------------------------------|------------------------------------|----------------------------|
| Product #:42700.0200 | Product #:42700.0250 | Product #:42750.0200 | Product #:42750.0250 | Product #:44000.0200 |
| | | | | |
| TF SERVER, 1G MECH GEN3 NOBASE | TF SERVER, 1.5G MECH GEN3 | TF SERVER, 1.5G MECH NOBASE GEN3 | | |
| Product #:44000.0250 | Product #:44050.0200 | Product #:44050.0250 | | |

