



PROJECT: _____
 ITEM # _____ QTY: _____
 MODEL # _____
 AIA # _____ SIS # _____

SELF-CONTAINED BLAST CHILLING / SHOCK FREEZING / THAWING

SELF-CONTAINED ROLL-IN BLAST CHILLING / SHOCK FREEZING / THAWING

VBCFT-20-200PU-XL

EXCLUSIVE WARRANTY

- ▶ 3 Year Parts & Labor Warranty
- ▶ 5 Year Compressor Warranty
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets



Note: Shown With Optional Ramp

CABINET CONSTRUCTION

- Stainless Steel Exterior And Interior (with rounded interior corners)
- Stainless Steel Door Liner
- Die-Formed Leak-Proof Floor
- High Density, Polyurethane Insulation
- Anti-Condensation Resistance, Placed On The Door Under The Gasket
- Hinged Door With Gasket And Closing Ramp System
- Ergonomic Vertical Door Handle
- Thick Stainless Steel Internal Bumper To Avoid Damage Caused By The Cart
- Circuit Breaker For Compressor Protection

FEATURES

- 5" High-Definition, Easy-To-Use Touch Display
- Blast Chilling, Shock Freezing And Thawing Modes
- Photo Identifiable Mode Settings
- Customized Blast Chilling, Blast Freezing And Thawing Cycles (320 cycles can be memorized)
- USB Connection For Uploading And Downloading Data And Recipes
- Heated Core Probe, With 4 Measuring Points
- Pre-Cooling Function
- Maximum Interior Dimensions For Carts: 35"W x 40"D x 71"H (not included)
- Ramp Dimension: 43.2"W x 31.9"D (ramp not included)

REFRIGERATION

- Self-Contained Refrigeration System Uses R404 Refrigerant
- Copper-Aluminum Evaporator With Anti-Corrosion Treatment
- High-Ventilation Evaporator To Ensure The Highest Efficiency Of The Cooling System
- Evaporator Installed On The Back With Accessible Cover And Adjustment Of The Speed Of The Evaporator Fans



Please Verify Qualifying Units By Visiting:
www.energystar.gov/cfs

OPTIONS & ACCESSORIES

- Single Sensor Probe
- Ramp (not included)

3779 Champion Blvd, Winston-Salem, NC 27105
 ph: (888) 845-9800 | fax: (800) 253-5168
 Sales@VictoryRefrigeration.com | VictoryRefrigeration.com


Rev. 7/1/24 Printed in U.S.A.

APPROVAL: _____ DATE: _____



SELF-CONTAINED ROLL-IN BLAST CHILLING / SHOCK FREEZING / THAWING

VBCFT-20-200PU-XL

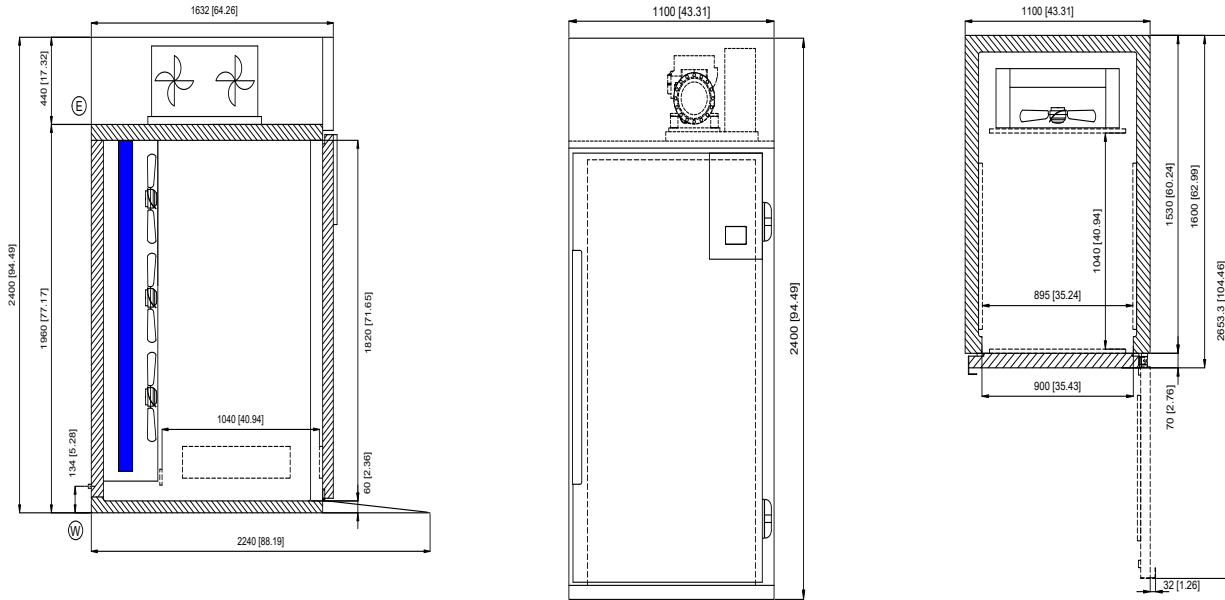

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top And 3" Rear Clearance Is Required

CHARACTERISTICS		REFRIGERATION DATA		SHIPPING DETAILS	
Width, Overall (in.)	43.31"	Condensing Unit Size, HP	2.8	Height	102"
Depth, Overall (with handle) (in.)	64.26"	Refrigerant	R404	Width	50"
Height Overall (in.)	94.49"	Capacity (BTU/HR) (113°F/-13°F)	10,857	Depth	70"
Width, Door Opening 90° (in.)	104.46"	Heat Rejection (W) (14°F/95°F)	9,850	Crated Weight	1570 lbs
Door Opening (in.)	35.43" x 71.65"	Refrigerant Amount (lbs)	6.4		
Carts (not included)	1 GN 2/1	PAN COUNT & PERFORMANCE			
Doors	1	Chilling Capacity In 90 Min	187 lbs		
ELECTRICAL DATA		Freezing Capacity In 240 Min	88 lbs		
Cabinet Voltage	208-240/60/3	Climate Class	4		
Total Amperes	23.8				
NEMA Plug (8' cord)	15-30P				

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 7/1/24 Printed in U.S.A.

