

Job: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

## Tray Drying Rack -- Correctional Duty

These racks conveniently stack pans and trays for drying without contact, allowing air to circulate freely for faster drying and to reduce pan-to-pan contamination.

- Framework is constructed out of 1½" x 1¾" x .070" wall tubing.
- Angle tray guides are .090" thick and are spaced on 1½" and 2¾" centers.
- Racks come equipped with four 6" x 2" platform type swivel casters.
- **Lifetime Guarantee** against rust and corrosion.
- **Five-Year Guarantee** against workmanship and material defects.
- NSF Certified.



#96704

Model No	Size ** W-H-D	Tray Levels	Guide Clearance	Tray Cap.	Ship Lbs.
96704	28½" x 64" x 58¼"	3	2.65"	120*	203
96705	28½" x 82" x 58¼"	4	2.65"	160*	249
96706	28½" x 64" x 69¼"	3	2.65"	144*	229
96707	28½" x 82" x 69¼"	4	2.65"	192*	283
96708	28½" x 64" x 63½"	3	1.4"	240*	228
96709	28½" x 82" x 63½"	4	1.4"	320*	282
96710	28½" x 64" x 75½"	3	1.4"	288*	263
96711	28½" x 82" x 75½"	4	1.4"	384*	325

Four 6" x 2" heavy duty platform type swivel casters (#C490) with tamper proof fasteners.

\* Note: Tray Capacity is based on two, compartmented or insulated trays per slot.

\*\* Height varies, based on tray size, confirm with factory when ordering.

Above height is based on a 16" tray.


**Options:**

**Caster Locks (2)** -- Add "CL" suffix to model #.

**Perimeter Bumper** -- Add "PB" suffix to model #.


**Vertical Bumpers (4)** -- Add "VB" suffix to model #.

**Note:** The bottom drainage channel is removed when perimeter and corner bumpers are used.

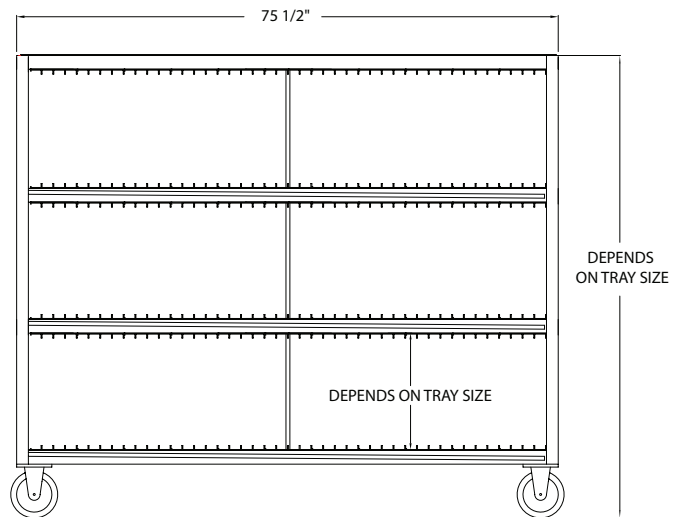

#96710

*This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.*



Distributed by: