



DUAL-TEMPERATURE BEVERAGE CENTER™

PRO-LINE™ 78" - 12 KEG / 12 FAUCET

- Designed by beverage dispensing experts for performance and value.
- Two dedicated temperature zones: beer, cocktails, white and red wine.
- Maximum beverage choice – limited footprint.
- Front breathing for cooling and exhaust.



MBB78BC-E-A

Black



Beer




Cocktail



White Wine



Red Wine

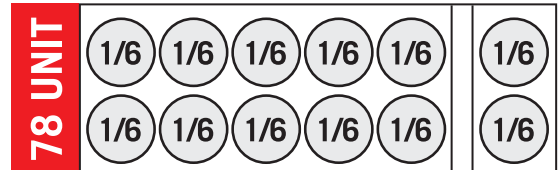

EXAMPLE:

6 Beers, 4 Wines, 2 Cocktails

Dual-Temperature: Built In Digital Thermostats



Listed by Edison Testing Laboratories.
Conforms to UL & NSF Standards.

Tap handles not included
Tapping hardware not included

www.micromatic.com • 1 (866) 327-4159

PRO-LINE™ 78" - 12 KEG

Job Number: _____ Location: _____

Part No.	Finish	Faucets	Doors	Shipping Weight
<input type="checkbox"/> MBB78BC-E-A	Black	12	3	TBD
				TBD

Operating Performance

Capacity of 20 Liter Kegs	12 (10 and 2 per zone)	Running Amps	3.0
Cubic Feet (liters)	TBD	Compressor HP	1/3
Holes for Towers	2	Voltage	115/60/1
Hole Diameter	3"	Plug Type	NEMA-5-15P
Color-coded Digital Thermostats	2 (Blue LED-Cold & Red LED-Cool)	Cord Length	8'
Temperature Range - Whites	42-48° F (5.5 - 8.8° C)	Refrigerant	R290
Temperature Range - Reds	55-65° F (12.7 - 18.3° C)	Charge oz	4.9
Approval	ETL Listed	Working High/Low Pressure	300 psig / 150 psig

Exterior	18 gauge stainless steel top, 22 gauge solid doors, 24 gauge steel front, sides and back
Interior	20 gauge stainless steel floor and walls
Ventilation	Front ventilated
Plumbing	Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing
Insulation	Foamed-in-place using high density, CFC-free polyurethane; 2" top, walls and floor
Accessories	Casters or 6" fixed legs

Dimensions

