



JET AIR OVEN PROOFER



Jet Air Oven/Proofer Combination, Electric, Capacity (3) 18"x26" Pans, Steam Injection, Reversing Fan System, Digital Temperature Control and Timer, (9) Pan Proofer with Auto Water Fill, Glass Doors, Stainless Steel Construction, Casters, cETLus, NSF



PROJECT _____

ITEM NO. _____

NOTES _____

MODEL NUMBER: **JAOP3**



FEATURES

- Digital Temperature Control up to 500°F (260°C)
 - Fast Preheat (reaches temperature in 15 minutes)
- Manual Controls for Proofer (separate heat & humidity)
- Digital Reminder Timer
- Jet Air Reversing Fan System
- Door Switch Cutoff for Fan Blower
- Shot Steam Injection System
- Available in Energy Efficient Gas or Electric

CONSTRUCTION

- Stainless Steel Construction
- Full View Heat Reflective Thermal Glass Doors with Magnetic Latches
- Brightly Lit Interior
- Fully Insulated and Completely Sealed
- 4 Swivel Casters (2 locking)

CLEARANCES

Minimum Clearance from Combustible Materials:

- 1" (25mm) Sides & Back
- 4" (102mm) on Non-Combustible Floor
- 12" (305mm) Top

OPTIONS & ACCESSORIES

- Water Filter (PLF240) [Recommended]
- High Temperature Gasket (HTG001) [Recommended for Temperatures above 400°F/205°C]
- Humidified Warmer/Proofer (temp. up to 180°F) (HW001)
- Perforated Nickel Plated Pizza Decks (GRPIZ3)

WARRANTY

- One Year Labor & Two Year Parts



Model	Crated Weight	Overall Dimensions			Interior Dimensions						Pan Capacity (18"x26")		Shelf Spacing	
					Oven			Proofer						
		W	D	H	W	D	H	W	D	H	Oven	Proofer	Oven	Proofer
JAOP3	750 lbs (341 kg)	32 1/2" (826)	37" (940)	71" (1805)	27 1/2" (699)	20" (508)	17 1/2" (445)	26" (660)	22 1/2" (572)	28 3/4" (730)	3	9	5" (127)	3" (76)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL & REVIT DRAWINGS UPON REQUEST

REVISION A | 5/11/2021

Follow Us



Doyon

5600 13th Street, Menominee, MI 49858

906.863.4401 | 800.338.9886 | www.doyon.qc.ca






PROJECT _____

ITEM NO. _____

NOTES _____

MODEL NUMBER: **JAOP3**

DRAWINGS

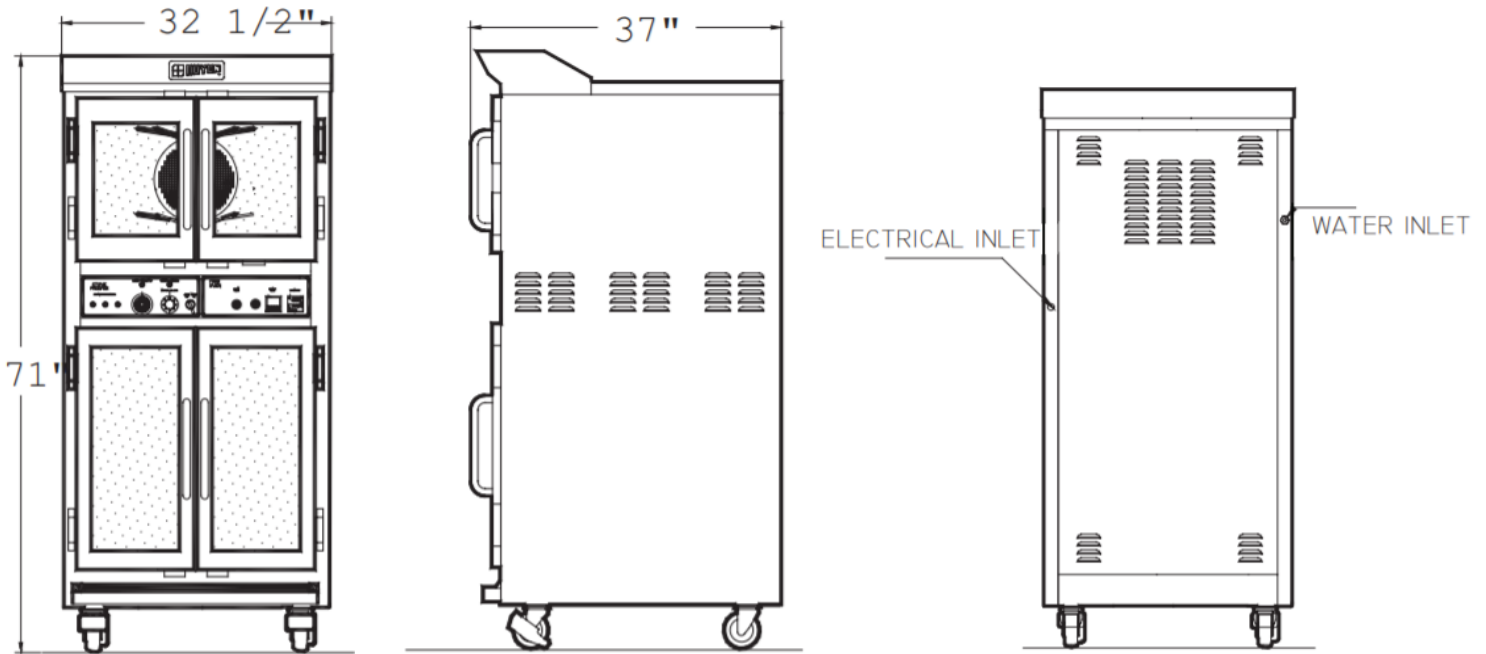

Model	Water Inlet	Electrical System *ground wire not included					
		Volts	Phases	Amps	kW	Wires*	Hz
JAOP3	1/4"	120/208	1/3	52/36	11.5	3/4	60
	(6)	120/240	1/3	48/32	11.5	3/4	60

