JDF®-4S

Height: 33.4" Width: 15.7" Depth: 27.5" (84.8cm) (39.9cm) (69.9cm)



- Patented High Intensity Mixing System delivers consistent quality beverages in the cup - cup after cup, from the top of the cup to the bottom of the cup
- 7" (17.8cm) cup clearance accommodates most juice containers
- Both push and hold dispense and optional single size portion control dispense available in the same dispenser
- Quick dispense with 1.0 to 1.5oz (29.6 to 44.4ml) per second flow rate
- One dispenser delivers both frozen and ambient concentrate products to maximize profitability by providing greater flexibility in product offerings
- Door lock standard
- · Service friendly design makes set up and maintenance simple
- Burst Capacity: At rate of three 12 oz drink/min, 145 drinks before exceeding 41°F (75°F ambient and 75°F incoming water temp)
- Pumps and Mixes most 2+1 to 11+1 concentrates accurately and consistently, including 4+1 and 5+1 high viscosity concentrates

Agency:



Additional Features

Specifications

Product #: 37300.0000

Flavors: 4 Flavors

Finish: Black

Door: Un-Lit

Refrigerant: R-134A Ice Bank: 18.00 lbs (8.165 kgs) Dispense: Push Button

Legs: 4" Black Legs

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	6	720	Yes	NEMA 5-15P	-	60°F (15.5°C)	1	2	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

CAD Drawings

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-100	138-689	3/8" Male Flare Fitting	-	•		


WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle



ntitle Last Updated: ment. 04/26/2024

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

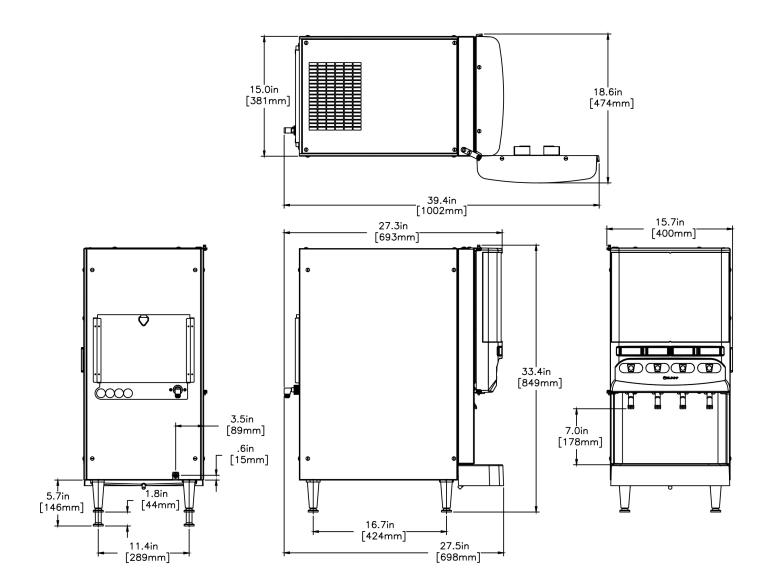


Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	33.4 in.	15.7 in.	27.5 in.	43.7 in.	22.8 in.	30.5 in.	142.750 lbs	17.543 ft ³	
Metric	84.8 cm	39.9 cm	69.9 cm	111.0 cm	57.8 cm	77.5 cm	64.751 kgs	0.497 m³	



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 04/26/2024

Related Products & Accessories: JDF®-4S(37300.0000)

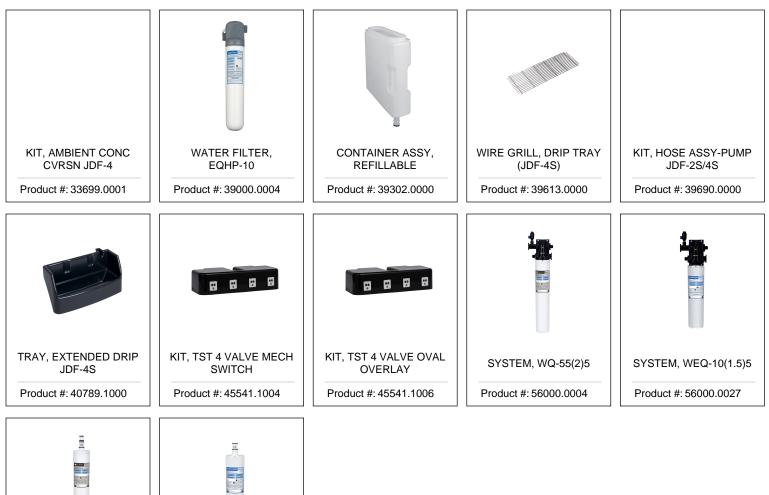

CARTRIDGE, WQ-55(2)5 Product #: 56000.0104

CARTRIDGE, WEQ-10 (1.5)5Product #: 56000.0122



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last Updated: the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last Updated: the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. 04/26/2024 For most current specifications and other info visit bunn.com.