

| Project:  | AIA# |
|-----------|------|
| Item:     |      |
| Location: | SIS# |
| Approved: |      |

## **BAR EQUIPMENT- BACK BAR REFRIGERATOR**

BB72HC Glass Door Pass-Thru With Stainless Steel Top Hydrocarbon Series

MODEL: BB72HC-1-G-PT-S-27



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Exterior is stainless steel front and sides
- Interior construction utilizes galvanized steel on walls and ceiling, heavy duty stainless steel floor
- Full electronic control
- 2" Stainless steel top
- · Magnetic door gaskets provide positive door sealing
- Self-closing doors
- Stay-open door feature & locks standard
- LED lighting
- · Packaged products only
- Six (6) epoxy coated wire shelves
- Balanced, forced air refrigeration system provides rapid chilling of product

## **OPTIONS & ACCESSORIES**

- For stainless steel interior (refer to -F models)
- Galvanized sub-top
- Wine model (40°-60° models)
- Wire shelf divider
- Additional shelves
- Additional shelf clips
- 3" or 6" Casters
- 6" Black legs
- Remote option\* (see note on back on page)

## **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Maintains product temperature between 36°F and 38°F










| MODEL                        | BB72HC-1-G-PT-S-27 |  |
|------------------------------|--------------------|--|
| EXTERNAL DIMENSIONAL DATA    |                    |  |
| Width Overall                | 72"                |  |
| Depth Overall                | 27 %"              |  |
| Height Overall               | 36"                |  |
| Number of Doors              | 6                  |  |
| Depth with Door Open 90°     | 63 ¾"              |  |
| Door Openings (in)           | 17 ¾" x 29 ¼"      |  |
| INTERNAL DIMENSIONAL DATA    |                    |  |
| NET Capacity (cubic ft.)     | 22.1               |  |
| Internal Width Useable (in)  | 60 ¼"              |  |
| Internal Depth Overall (in)  | 19 ¾"              |  |
| Internal Height Overall (in) | 29 ½"              |  |
| Number of Shelves            | 6                  |  |
| Number of 1/2 Kegs           | 3                  |  |
| ELECTRICAL DATA              |                    |  |
| Full Load Amperes            | 3.1                |  |
| REFRIGERATION DATA           |                    |  |
| Horsepower                   | 1/3                |  |
| Capacity (BTU/Hr)            | 1942               |  |
| Heat Rejection (BTU/Hr)      | 2913               |  |
| Charge (lbs/grams/ounces)    | 0.3086 / 140 / 4.9 |  |
| SHIPPING DATA                |                    |  |
| Gross Weight - Crated        | 425 lbs            |  |
| Height - Crated              | 43"                |  |
| Width - Crated               | 75"                |  |
| Depth - Crated               | 29"                |  |

<sup>\*</sup>NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4\*. Metric dimensions (MM).

# Bar Equipment-Back Bar Refrigerator Model: BB72HC-1-G-PT-S-27

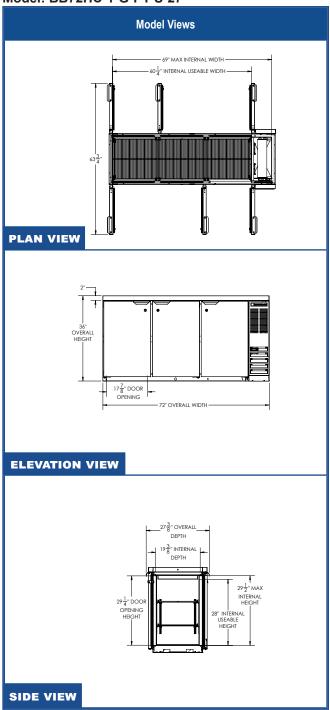





#### **ELECTRICAL CONNECTION**

115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

