

{13.74}



RT Aluminum “Knock-Down” Racks

Economical storage & transport for all areas like freezers, coolers, bakeries. Pass-thru design affords maximum convenience.

Features & Benefits:


- **Rugged:** Aluminum tubular frame with aircraft-riveted slide assemblies.
- **Economical:** Shipped “knocked down” for reduced freight rate. Easily assembled with 12 bolts.
- **Sanitary:** Removable slides for easy cleaning.
- **Stable:** Rubber, NSF-listed casters, corner-mounted for maximum stability. 2 with brakes.
- **Lightweight:** Easy to handle.

Specifications:

- **Material:** Natural finish, high-strength, extruded aluminum (6063-T6 alloy).
- **Construction:** Aircraft-riveted construction on slide assemblies, Tensilok fasteners for frame assembly.
- **End Frames:** 1" (25mm) square x .093" (2.4mm) wall extruded aluminum tubing.
- **Tie Bars:** Left to right and front to back tie bars of 1" (25mm) diameter aluminum bar stock, drilled and tapped at each end.
- **L Channel Slides:** 3" (76mm) & 5" (127mm) Spacing: .060" x 1.25" x 1.5" (1.5 x 32 x 38mm) profile, bulb-tipped extruded angle-riveted to .060" x 1" x 1" (1.5 x 25 x 25mm) angle uprights. (RT115N, RT183N, RT3318N, RT3311N)
- **C Channel Slides:** 1.5" (38mm) Spacing: .060" x .5" x 1.5" (1.5 x 13 x 38mm) profile, bulb-tipped extruded channel-riveted to .060" x 1" x 1" (1.5 x 25 x 25mm) angle uprights. (RT1334N)
- **Casters:** Two swivel / Two Brake – 5" (127mm) diameter ball bearing swivel stem casters with self-lubricating axle.



End-Load
(RT183N)

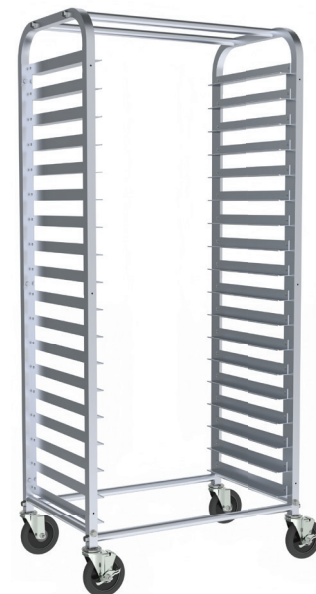

Side-Load
(RT3318N)

No. of Pans	Pan Capacity (in.)	(mm)	Approx. Pkd. Wt. (lbs.) (kg)		Load	Cat. No.
18	18x26	457x660	53	23.8	End-Load	RT183N
or 36	14x18	355x457				
11	18x26	457x660	50	22.5	End-Load	RT115N
or 22	14x18	355x457				
34	18x26	457x660	55	24.7	End-Load	RT1334N
18	18x26	457x660	40	18	Side-Load	RT3318N
11	18x26	457x660	38	17.1	Side-Load	RT3311N

Note: 5" (127mm) swivel casters, two with brakes, are standard on units listed above.
Weight Load Capacity: 20 lbs. (9kg) per slide level; 300 lbs. (136kg) per rack. Allowable temperature range: -30°F (-34°C) to 160°F (71°C).




{13.74}




RT Aluminum "Knock-Down" Racks

End-Load Units



RT115N - 5" SLIDE SPACING
11 SETS OF SLIDES

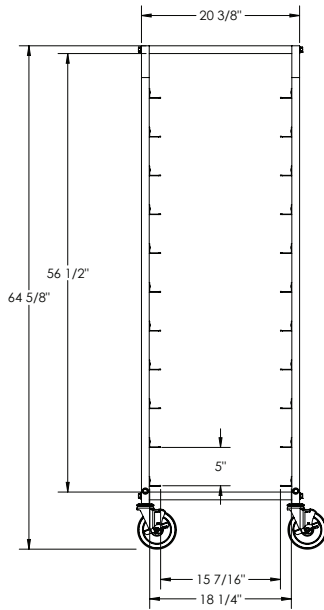

RT183N - 3" SLIDE SPACING
18 SETS OF SLIDES

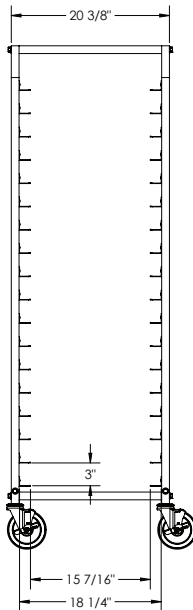


RT1334N - 1-1/2" SLIDE SPACING
34 SETS OF SLIDES

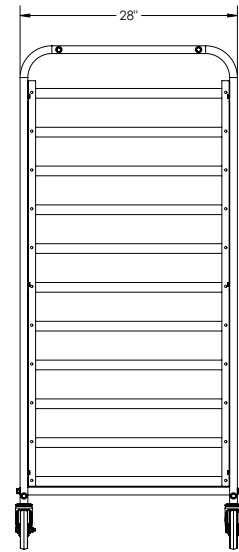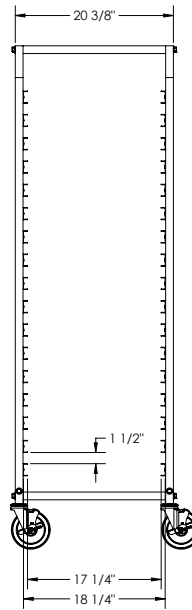

Side-Load Units

RT3318N - 3" SLIDE SPACING
18 SETS OF SLIDES

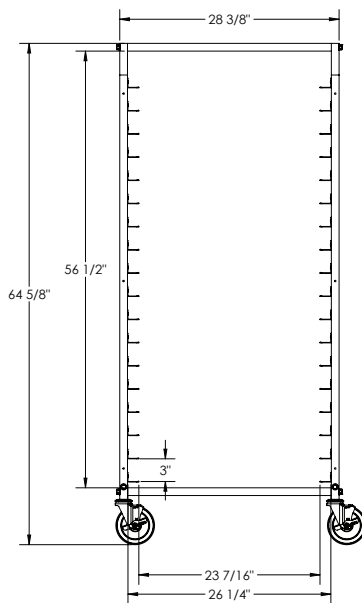

RT3511N - 5" SLIDE SPACING
11 SETS OF SLIDES

