

# 4C<sup>2</sup> FILTER CARTRIDGE

DELIVERS PREMIUM QUALITY WATER FOR COLD CUP VENDING APPLICATIONS

4C<sup>2</sup> Replacement Cartridge:  
EV9605-50 (1-pack)  
EV9605-56 (6-pack)



## APPLICATIONS

- ◆ Cold Cup Vending
- ◆ Small Fountain Applications

## FEATURES • BENEFITS

- ◆ Provides clear, fresh, premium quality ingredient water for great tasting cold beverages
- ◆ Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination
- ◆ Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear
- ◆ Exclusive precoat filtration provides superior chlorine taste & odor reduction and micro-filters dirt and particles as small as 0.2\* micron in size by mechanical means
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means
- ◆ Improves the taste of fountain beverages and helps retain the drink's carbonation
- ◆ Proprietary Everpure Micro-Pure® II filtration media effectively inhibits the growth of bacteria on the filter media that can decrease product life
- ◆ Does not remove fluoride
- ◆ NSF® Certified under NSF/ANSI Standards 42 and 53

\* Validated by ISO 17025 accredited lab for 99.999% reduction of *Pseudomonas diminuta* following the ASTM F838-05 protocol for the validation of 0.2 µm sterilizing grade filters.

## INSTALLATION TIPS

- ◆ Never use saddle valve for connection.
- ◆ Use 3/8" water line.
- ◆ Install vertically with cartridge hanging down.
- ◆ Allow 2½" (6.35 cm) clearance below the cartridge for easy cartridge replacement.
- ◆ Flush 4C<sup>2</sup> cartridge by running water through filter for five (5) minutes at full flow.

## OPERATION TIPS

- ◆ Replace cartridge when flow rate becomes inconveniently slow or before rated capacity is reached. It is recommended to replace cartridge at least once per year.
- ◆ Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).
- ◆ Service flow rate must not exceed 0.5 gpm (1.9 Lpm).
- ◆ Always flush the filter cartridge at time of installation and cartridge change.


## SIZING

- ◆ Service Flow Rate:  
Maximum 0.5 gpm (1.9 Lpm)
- ◆ Rated Capacity:  
3,950 gallons (14,952 L)

# 4C<sup>2</sup> FILTER CARTRIDGE

EV9605-50

4C2 Replacement Cartridge:  
EV9605-50 (1-pack)  
EV9605-56 (6-pack)

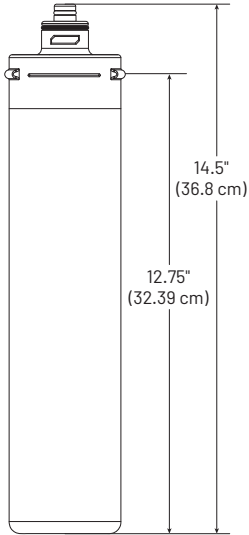

## SPECIFICATIONS

- ◆ **Rated Capacity**  
3,950 gallons (14,952)
- ◆ **Service Flow Rate**  
Maximum 0.5 gpm (1.9 Lpm)
- ◆ **Pressure Requirements**  
10 - 125 psi (0.7 - 8.6 bar), non-shock
- ◆ **Temperature**  
35 - 100°F (2 - 38°C)
- ◆ **Overall Dimensions**  
14.5" L x 3.25" D (36.8 cm x 8.2 cm)



System Tested and Certified by NSF International against NSF/ANSI Standards 42 and 53 for the reduction of:

STANDARD NO. 42 – AESTHETIC EFFECTS Bacteriostatic Effects Chemical Reduction Taste & Odor Chlorine	STANDARD NO. 53 – HEALTH EFFECTS Mechanical Filtration Cyst
--	--

EPA Est. No. 002623-IL-002

## WARRANTY

Everpure water treatment systems by Pentair (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Pentair will provide a copy of the warranty upon request.

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.



**World Headquarters**  
1040 Muirfield Drive  
Hanover Park, IL 60133  
United States  
800.942.1153 (US Only)  
630.307.3000 Main  
cseverpure@pentair.com

**Australia**  
1-21 Monash Drive  
Dandenong South, Vic 3175  
Australia  
011.1300 576 190 Tel  
au.everpure@pentair.com

**China**  
21F Cloud 9 Plaza, NO 1118  
Shanghai, 200052  
China  
86.21.3211.4588 Tel  
china.water@pentair.com

**India**  
Boulevard, B-9/A,  
7th Floor - Tower B Sector 62  
Noida - 201301  
91.120.419.9444 Tel  
indiacustomer@pentair.com

**Europe**  
Pentair Water Belgium BVBA  
Industriepark Wolfstee,  
Toekomstlaan 30,  
B-2200 Herentals  
Belgium  
+32.(0).14.283.504 Tel  
sales@everpure-europe.com

**Japan Inc.**  
Hashimoto MN Bldg. 7F,  
3-25-1 Hashimoto, Midori-ku,  
Sagamihara-shi  
Kanagawa 252-0143  
Japan  
81.(0)42.775.3011 Tel  
info@everpure.co.jp

**Southeast Asia**  
390 Havelock Road,  
#04-01 King's Centre  
Singapore 169662  
65.6768.5800 Tel  
cseverpure@pentair.com

§ Pentair trademarks and logos are owned by Pentair plc or its affiliates. For a detailed list of where Pentair trademarks are registered, please visit [www.pentair.com/en/registrations.html](http://www.pentair.com/en/registrations.html). Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

EV9605-50 N019 ©2019 Pentair Filtration Solutions, LLC. All Rights Reserved.