

Madalı	16-405L

Project: \_\_\_\_\_

\_\_\_ Item #: \_\_\_\_\_ Date: \_\_

\_\_\_ Qty: \_\_\_\_\_\_ Approved By: \_\_

## Thermostatic Mixing Valve with Built-in Check Valves

**Royal Series** 



## **DESCRIPTION**

 Thermostatic Mixing Valve with Built-in Check Valves, 1/2" Male NPS Outlets and Inlets, and Locking Temperature Adjustment Knob


## STANDARD FEATURES

- Built-in Check Valves
- Check Valve Filter Screens
- Locking Adjustment Knob to Set Max Temperature
- Preset to 100°F (38°C) Max Temperature

SPECIFICATIONS	
Water Inlets	1/2" NPS Male
Water Outlet	1/2" NPS Male
Temp. Range	40°F - 180°F
Outlet Adjustment Range	80°F - 120°F
Default Outlet Temperature	100°F
Pressure	20-120 PSI
Weight	1 lbs.

## **PRODUCT COMPLIANCE**

ASSE 1070 Certified

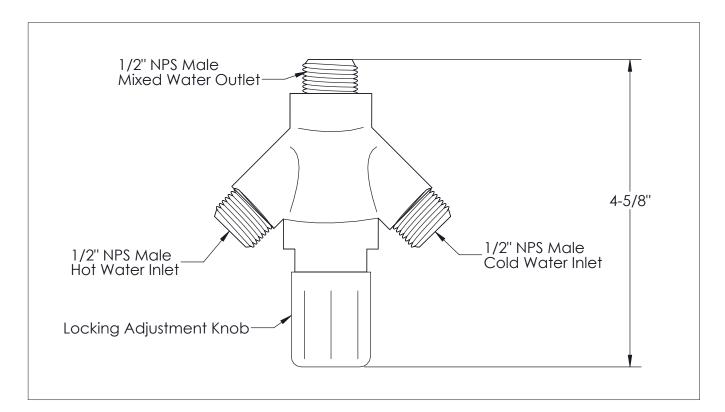

WARNING: Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes. California Proposition 65 Warning