

Project: _____

Item: _____

Quantity: _____

Tray Drying Rack - Correctional



These racks conveniently stack pans and trays for drying without contact, allowing air to circulate freely for faster drying and to reduce pan-to-pan contamination.

- Constructed of Primary Grade aluminum.
- Framework is constructed out of 1½" x 1¾" x .070" wall tubing.
- Angle tray guides are .090" thick and are spaced on 1½" and 2¾" centers.
- Racks come equipped with four 6" x 2" plate type swivel casters.
- **Five-Year Guarantee** against workmanship and material defects.
- **Lifetime Guarantee** against rust and corrosion.
- NSF Certified.

▶ Correctional Duty Tray Drying Rack

Model No	Size ** W-H-L	Tray Levels	Guide Clearance	Tray Capacity	Ship Lbs.
96704	28½" x 64" x 58¼"	3	2.65"	120*	245
96705	28½" x 82" x 58¼"	4	2.65"	160*	239
96706	28½" x 64" x 69¼"	3	2.65"	144*	282
96707	28½" x 82" x 69¼"	4	2.65"	192*	343
96708	28½" x 64" x 63½"	3	1.4"	240*	290
96709	28½" x 82" x 63½"	4	1.4"	320*	318
96710	28½" x 64" x 75½"	3	1.4"	288*	318
96711	28½" x 82" x 75½"	4	1.4"	384*	395

Four 6" x 2" heavy duty plate type swivel casters with **tamper proof fasteners**.

* Note: Tray Capacity is based on two, compartmented or insulated trays per slot.

** Height varies, based on tray size, confirm with factory when ordering. Above height is based on a 16" tray.


Options: Options may not be NSF Certified. Contact the factory.

- Caster Locks (2)** - Add "CL" suffix to model #.
- Perimeter Bumper** - Add "PB" suffix to model #.
- Vertical Bumper (4)** - Add "VB" suffix to model #.

Note: The bottom drainage channel is removed when perimeter and vertical bumpers are used.



These Tray Drying Racks are built-to-order and cannot be returned.

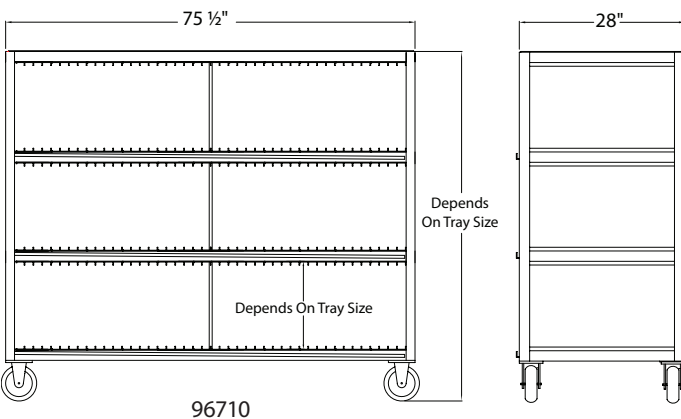

New Age Industrial Corp., Inc. || NewAgeIndustrial.com || Made in the USA

PO Box 520 • 16788 US Hwy 36 • Norton, Kansas 67654 || Phone: (800) 255-0104 • (785) 877-5121 || Fax: (877)-877-7687 • (785) 877-2616

This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time, without notice, to materials and specifications.