

"S16MS-S" MACHINE STANDS

16GA S.S. Top w/Stainless Steel Base

FEATURES:

- 16GA Type 300 Stainless Steel Top With #4 Polish, Satin Finish
- Reinforced With A 1/2" Channel Running Entire Length Of Table
- Bracing Adjustable To Desired Height
- Adjustable Bullet Feet
- Shipped Knocked-Down, Easy-To-Assemble

SPECIFICATIONS:

- Top: Stainless Steel Tops Are TIG Welded, Exposed Welds Are Polished To Match Adjacent Surface
- Base: MIG Welded Stainless Frame
- Top: 16GA Stainless Steel Type 300 Stainless Steel With #4 Polish, Satin Finish
- Bracing: 1-1/4" Round O.D. 18GA Tubular Stainless Steel
- Gussets: Stainless Steel
- Feet: 1" Adjustable Bullet Feet

CERTIFICATIONS:






"S16MS-S" MACHINE STANDS

LENGTH	20" WIDE	WT. (LBS)	24" WIDE	WT. (LBS)	30" WIDE	WT. (LBS)
24"	S16MS06	31	S16MS07	34	-	-
30"	S16MS08	36	S16MS09	38	S16MS10	42

ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

DETAILED SPECIFICATIONS

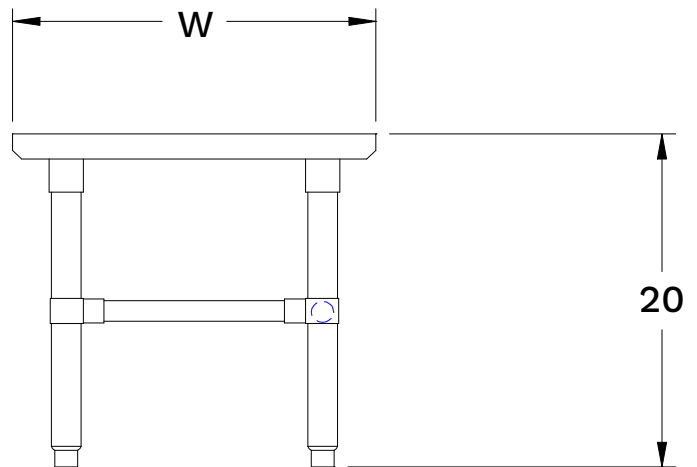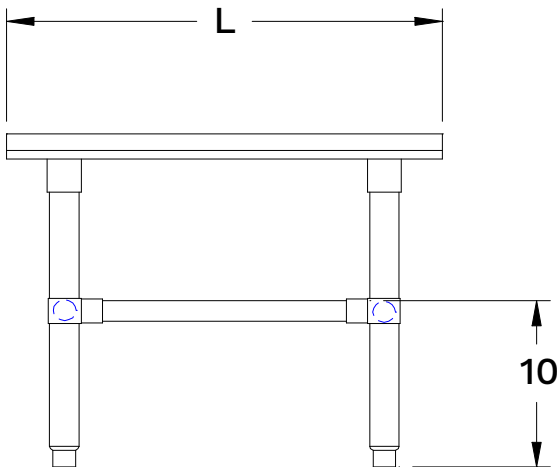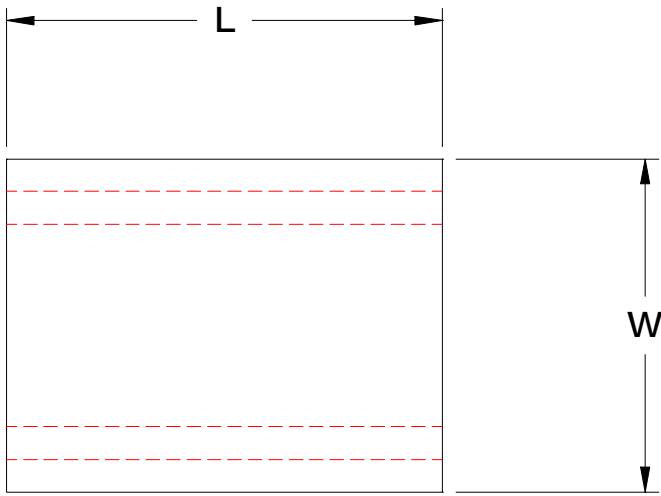

"S16MS-S" MACHINE STANDS

LENGTH	20" WIDE	WT. (LBS)	24" WIDE	WT. (LBS)	30" WIDE	WT. (LBS)
24"	S16MS06	31	S16MS07	34	-	-
30"	S16MS08	36	S16MS09	38	S16MS10	42

ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.