Specification/Data sheet Stand UG XS for XS model 6 2/3 - standard



Item number: 60.31.029

Description

- Standard version
- For higher installation of the SelfCookingCenter® XS onto a working surface (variable elevation by 19,5 cm (7 5/8"))
- Elevation of the unit drain so that it can go over an overflow edge on the working surface of up to 16 cm
- Levelling of the SelfCookingCenter® XS by compensating for uneven surfaces or inclinations of up to 2°
- Can be fixed onto the working surface (welded or screwed onto the working surface with threaded bolts)
- · Weight: 4.5 kg
- 629 (24 3/4) mm (inch) W x 438 (17 1/4) mm (inch) D x 148 (5 7/8) mm (inch) H
- Max. fixed power: 270 kg
- consisting of frames, 4 x feet 12.01.172 and 4 x rubber slide protection

Special feature/equipment


- · Height-adjustable feet adjustable to up to 4.5 cm
- The rubber slide protection included prevents the unit from slipping during operation

Material

Rust-free stainless steel (CNS 1.4301)


Note

- For the installation of a SelfCookingCenter® XS onto a working surface. If there is no worktop, higher oven stands are also available.
- Installation must only be undertaken by qualified specialists who are familiar with the installation, start-up and operation of the appliance.



Tel.: 888-320-7274 Fax.: 847-755-9583



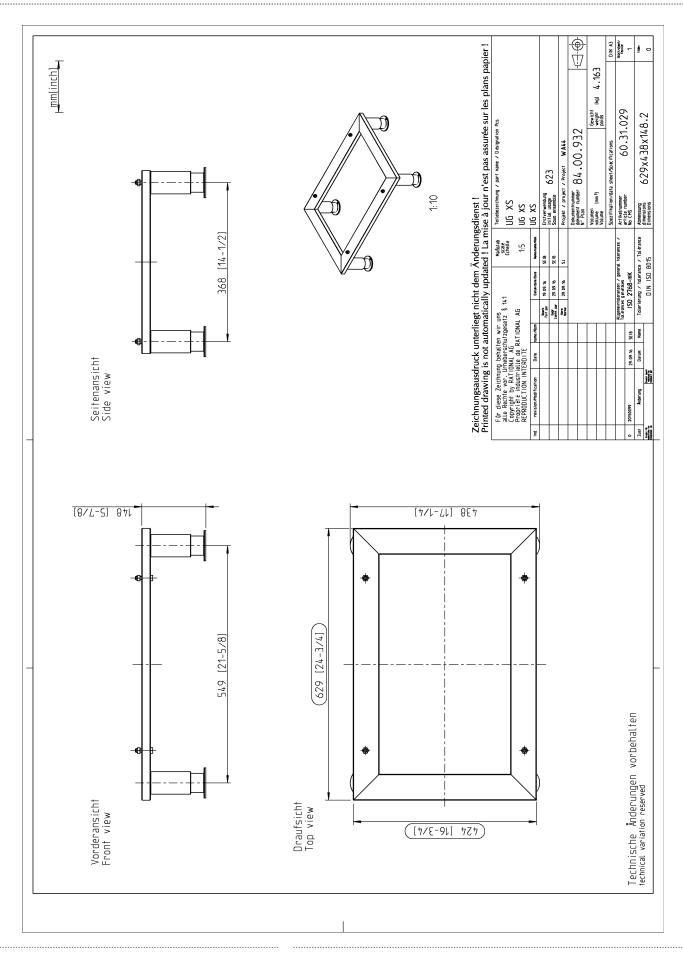

1701 Golf Road, Suite C-120, Commercium Rolling Meadows,

IL 60008

Tel.: 888-320-7274 Fax.: 847-755-9583 Visit us on the internet: www.rationalusa.com

We reserve the right to make technical improvements