## JDF®-4S, 120V LIT PC W/ 4 SEG GFX

Height: 33.1" Width: 15.7" Depth: 27.5" (84.1cm) (39.9cm) (69.9cm)



- Patented High Intensity Mixing System delivers consistent quality beverages in the cup --- cup after cup, from the top of the cup to the bottom of the cup
- Four Segment Graphic Door makes graphics changes easy. Includes variety-pack
  of eight displays: Apple Juice; Cranberry Juice; Grape Juice; Lemonade; Orange
  Juice; Pineapple Juice; Prune Juice; Iced Tea
- LED lighted door graphics bring high visibility to front-of-house applications
- One dispenser delivers both frozen and ambient concentrate products, to maximize
  profitability by providing greater flexibility in product offerings
- 18lb (8.2 kg) ice bank provides superior cold drink capacity
- Portion Control dispense model: 3 dispense sizes can be set
- 7" (17.8cm) cup clearance accommodates most juice containers
- Quick dispense with 1.0 to 1.5oz (29.6 to 44.4ml) per second flow rate
- · Door lock standard
- · Service friendly design makes set up and maintenance simple
- Pumps and Mixes most 2+1 to 11+1 concentrates accurately and consistently, including 4+1 and 5+1 high viscosity concentrates

#### Agency:





#### **Specifications**

Product #: 37300.0080 Refrigerant: R-134A

Flavors: 4 Flavors Ice Bank: 18.00 lbs (8.165 kgs)

Finish: Black Dispense: Push Button

**Door:** Lit **Dispense:** Single Size Portion Control

### **Electrical & Capacity**

Volts	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120	6	720	Yes	NEMA 5-15P	-	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

### Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-100	138-689	3/8" Male Flare Fitting	-


#### **CAD Drawings**

Additional Features

2D	Revit	KLC
•		

MARNING:



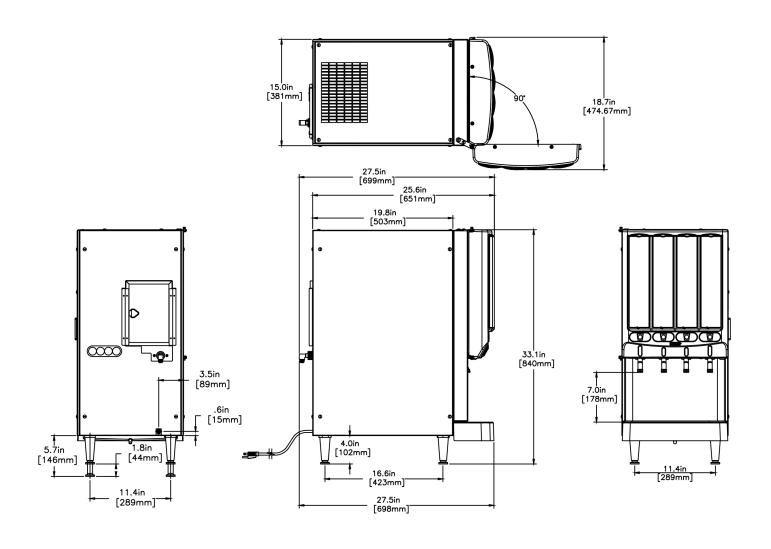

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	33.1 in.	15.7 in.	27.5 in.	43.7 in.	22.8 in.	30.5 in.	144.000 lbs	17.543 ft³
Metric	84.1 cm	39.9 cm	69.9 cm	111.0 cm	57.8 cm	77.5 cm	65.318 kgs	0.497 m³




# Related Products & Accessories: JDF®-4S, 120V LIT PC W/ 4 SEG GFX(37300.0080)











Product #: 40789.1000











Serving & Holding	Options: JDF®-4S,	, 120V LIT PC W/ 4 SEG GFX(37	300.0080)
-------------------	-------------------	-------------------------------	-----------

\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*

