

Specification/Datasheet

UltraVent Plus Type XS



Article number

60.74.407

Description

The UltraVent Plus XS gets rid of the steam emitted with its condensation technology. No connection to the outside or extension of an existing exhaust system is necessary with this air recirculation hood.

It is also equipped with special filter technology which reduces lingering smoke, which can be created with fatty/oily products at high temperature.

Intended use

This product is intended exclusively for professional use, such as in restaurant kitchens or catering operations for schools, hospitals, or delis. Any other use runs counter to its intended purpose, and could be dangerous. RATIONAL AG assumes no liability for consequences of improper use.

Features

- Special filter technology with a replaceable HEPA H11 main filter to reduce smoke
- Reduces linger steam and vapors. These are captured and condensed in the hood
- Easy to clean prefilter and stainless steel grease baffles
- Automatically boosts extraction rate when cooking cabinet door is opened
- Wastewater discharged by the device - no additional discharge line needed
- Easy to install and retrofit
- LED light informs operator when filters need replacing

Technical specifications

Supplied with an 8 ft 2 in (2.5 m) power cable with 5-15 P-connector

Connection:	120 V - 1 ph
Frequency:	60 Hz
Connected load:	180 W
Running Amps (A):	1.6 A
Extraction capacity:	165-333 ft ³ /min
Operating noise level:	52-67 db(A)

Dimensions and weights

Width (W):	25 7/8 in
Height (H):	13 3/8 in
Depth (D):	23 in
Weight:	66.1 lb

Material

Stainless steel (CNS 1.4301/AISI 304)

Equipment/Scope of delivery

- An installation option for left- and right-hinged units is included in the scope of delivery
- The condensation hood includes an adapter kit for optional installation on a Combi-Duo XS

Specification/Datasheet

UltraVent Plus Type XS



Note

- The local standards and regulations for ventilation systems must be adhered to
- The condensation hood can be used for right-sided units as well as for left-sided units
- Not to be used with VarioSmokers
- We recommend maintaining an overhead clearance of at least 18" (450 mm) for all cooking systems and Combi-Duos using an UltraVent or an UltraVent Plus
- In individual cases involving Model 10-half size or smaller tabletop cooking systems, this clearance can be reduced to a minimum of 10" (250 mm) following expert evaluation of local framework conditions
- To install an UltraVent or UltraVent Plus on a iCombi Pro XS (from 04/2023) a corresponding adapter kit is required

Approvals




Specification/Datasheet


UltraVent Plus Type XS




Vorderansicht
Front view
Vue de face

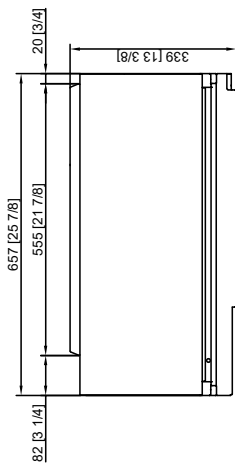


Seitenansicht
Side view
Vue de côté

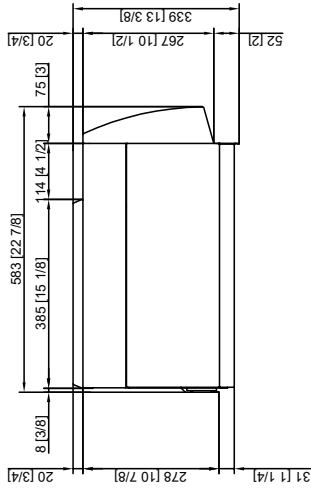

Rückansicht
Back view
Vue arrière

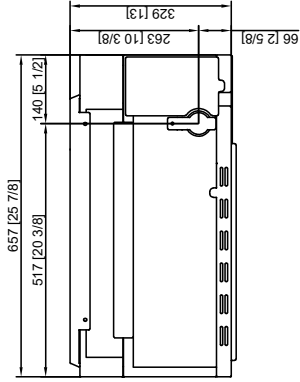

Draufsicht
Top view
Vue de dessus

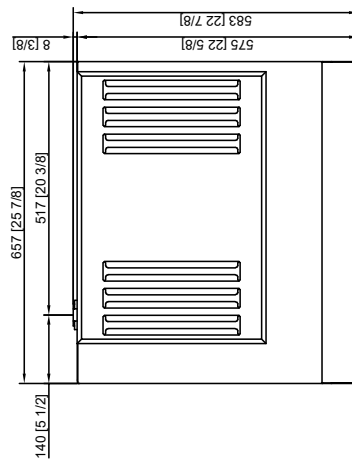

Informations/Informations/Informations		Beschreibung/Description/description	
Zehnjahresdruck unterliegt nicht dem Papierpreisrisiko Printed drawing is not automatically updated! La mise à jour n'est pas assurée sur les plans papier!		UltraVent Plus (CP-CP) XS 6-23	
Revizija/Revision/Revisión	Project/Projekt/Projet	Estimator/Estimateur/Estimateur	30.09.2019
1	1	1	RATIONAL AG 2019
2	1	1	mm [inch]
3	1	1	
4	1	1	
5	1	1	
6	1	1	
7	1	1	
8	1	1	