

EDH HIGH TEMPERATURE Door Type Dish Machine



SPECIFIER STATEMENT

Specified unit will be NSF rated, **Ecoline™ by Hobart** high temperature door type dishwasher. Features recirculating design, pumped rinse, pumped drain, 17" door opening, .94 gallons per rack, LED temperature and operator display, service diagnostics, interchangeable snap-in wash and rinse arms. Constructed of stainless steel, rated at 51 racks per hour. 208-240/60/3/1 field convertible standard voltage.

1 year parts and labor warranty.

MODELS

- EDH High temperature sanitizing

STANDARD FEATURES


- + 51 racks per hour
- + .94 gallons of water per rack
- + High temperature sanitizing
- + Recirculating design
- + User interface with digital temperature display
- + Single point electrical connection standard
- + 3 phase standard, field convertible to single phase
- + 4-sided door
- + 1 standard cycle
- + 17" pillarless door opening
- + Snap-in, revolving upper and lower anti-clogging wash & rinse arm; low-profile design
- + Removable, stainless steel scrap screen
- + Soft start
- + Built-in booster
- + Automatic pumped drain
- + Pumped rinse
- + Automatic fill
- + Service diagnostics with error notifications
- + Delime cycle
- + Electric tank heat
- + Straight through or corner installation

OPTIONS & ACCESSORIES (AVAILABLE AT EXTRA COST)


- Chemical pumps with visual indicators
- Chemical sensing indicators (low chemical alert)
- Corner splash kit
- Water hammer arrestor kit
- Drain water tempering kit
- Pumped drain air gap kit
- Peg rack
- Combination rack
- Flanged feet

EDH HIGH TEMPERATURE


Approved by _____ Date _____ Approved by _____ Date _____

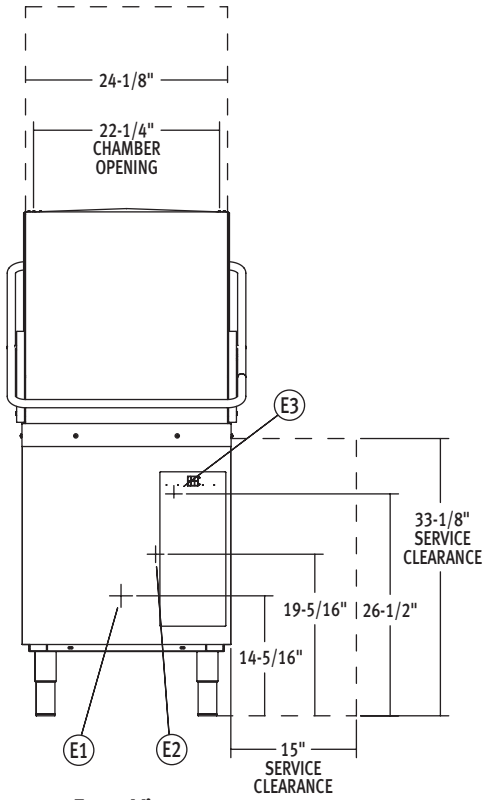


Front View

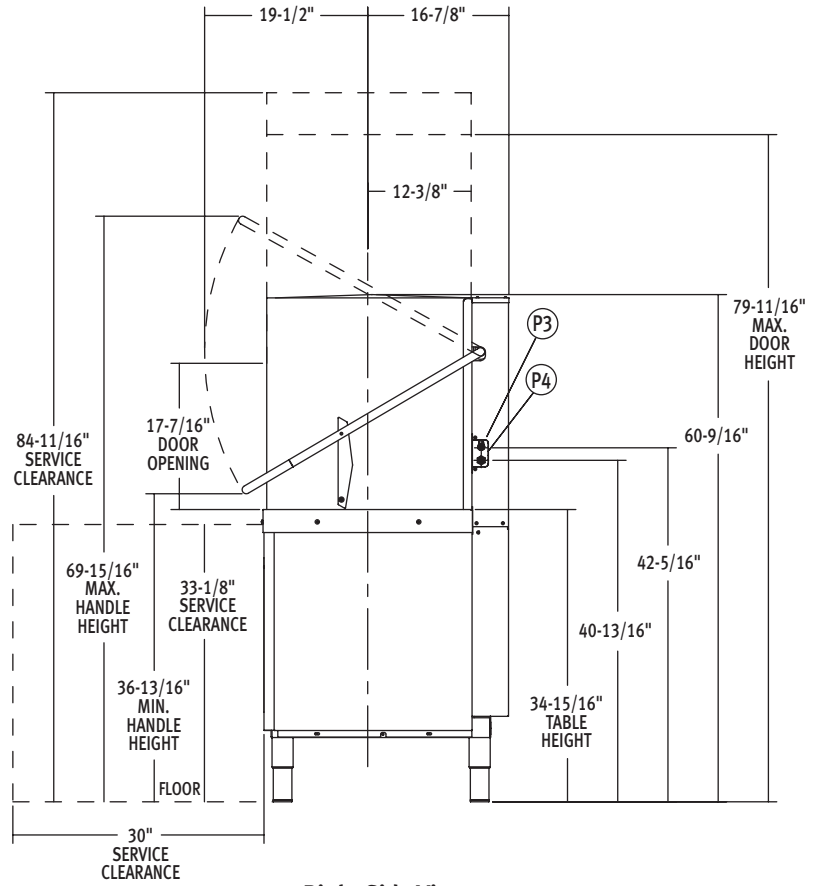

Right Side View

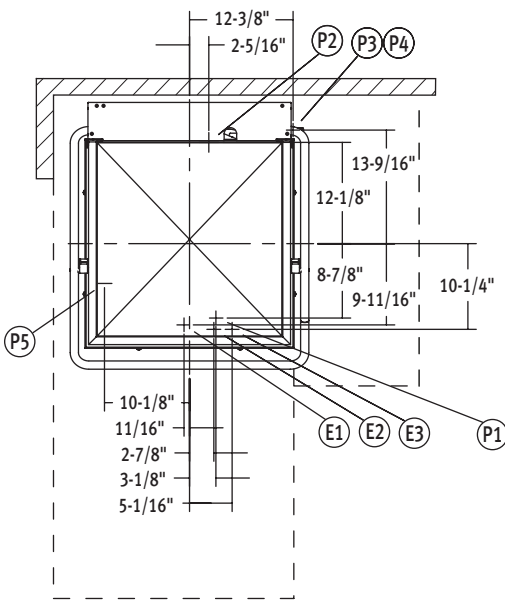

Top View

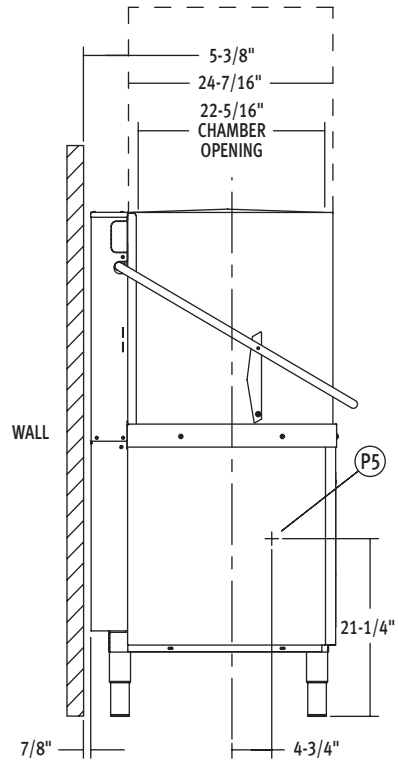


Left Side View


MODEL: EDL
00-563891
REV. A1

LEGEND

Electrical Connections	
E1	Electrical connection: 1-1/8" dia. hole for 1" trade size conduit; 8-3/4" AFF.
E2	Electrical connection: Detergent & rinse agent feeders, (DET1 & DET2) 1.5 amps @ 120V supply voltage, (RNS1 & RNS2) 1.5 amps @ 120V supply voltage; 19-5/16" AFF.
E3	Electrical connection: Vent fan control (VFC1 & VFC2) switching circuit only 1.5 amps @ nameplate supply voltage; 26-1/2" AFF.
Plumbing Connections	
P1	Single fill and rinse connection: 3/4" female garden hose fitting on 9' long hose supplied with machine; 120°F water minimum.
P2	Drain connection: 19mm barb fitting with 9' long hose supplied with machine.
P3	Chemical supply: Detergent. Approximately 42-5/16" AFF. 15mm barb fitting.
P4	Rinse agent feeder: Remove 1/8" NPT pipe plug to access 1/8" NPT tapped hole; 40-13/16" AFF.
P5	Detergent probe sensor: Remove cap and stud assembly to access 7/8" hole; 21-1/4" AFF.

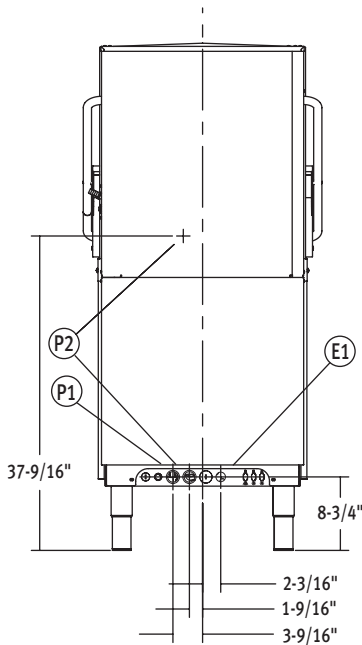

Back View

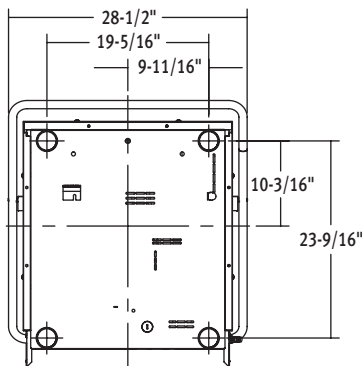

Bottom View

WARNING: Electrical and grounding connections must comply with the applicable portion of the National Electrical Code and/or other local electrical codes.

Plumbing connections must comply with applicable sanitary, safety, and plumbing codes.

SPECIFICATIONS

Capacities

Racks per Hour (maximum)	51
Dishes per Hour (average 25 per rack)	1,275
Glasses per Hour (average 45 per rack)	2,295
Wash Tank (U.S. gallons)	7.9

Motor Horsepower

Rinse Pump	0.25
Wash Pump	0.80
Drain Pump	0.04

Rinse

Gallons per Rack	0.94
Gallons per Hour (maximum consumption)	47.7

Peak Rate of Drain Flow

Gallons per Minute (initial rate with full tank)	15
--	----

Heating

Electric Booster (kW)	6.5
Electric Heating Unit (kW)	5

Exhaust Requirements 450 CFM

Shipping Weight (approximate) 224 lbs.

Crated Dimensions 90.0"H x 30.0"W x 33.0"L

EDH Single Point Electrical Service Connection as Shown Below			
Elec. Specs	Rated Amps	Minimum Supply Circuit Ampacity	Maximum Protective Device
208/60/1	31.7	40	40
208/60/3	35.0	40	40
240/60/1	31.7	40	40
240/60/3	35.0	40	40


Plumbing Notes:

1. Water hammer arrestor (meeting ASSE-1010 standard or equivalent) to be supplied (by others) in common water supply line at service connection.
2. Recommended water hardness to be 3 grains or less for best results.
3. Recommended building flowing water pressure to the dishwasher at or above 20 PSI. Pressure lower than 20 PSI may affect machine fill/start-up times.
4. This is a pumped rinse machine. Pressure regulating valve is not necessary unless incoming flowing water pressure is greater than 65 PSI.
5. For convenience when cleaning, water tap should be installed near machine with heavy duty hose and squeeze valve.

Miscellaneous Notes:


1. All vertical dimensions taken from floor line may increase or decrease 1-1/4" depending on leg adjustment.
2. Vent hood (if required) to provide a minimum of 450 CFM exhaust (ref installation instructions).
3. Net weight of machine including booster: 202 lbs. Domestic shipping weight including booster: 224 lbs.
4. Size of racks – 19³/₄" x 19³/₄".

Approximate Heat Gain to Space without Vent Hood		
Type	Latent (BTU/Hr.)	Sensible (BTU/Hr.)
208/60/1	9,300	4,000
208/60/3	16,100	6,900
240/60/1	12,000	5,200
240/60/3	20,400	8,700


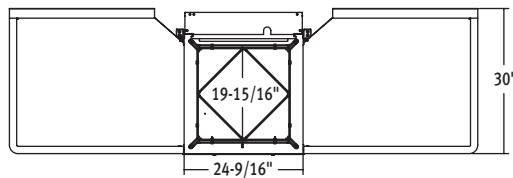


**PASS THRU
INSTALLATION**


TOP INSIDE VIEW OF MACHINE

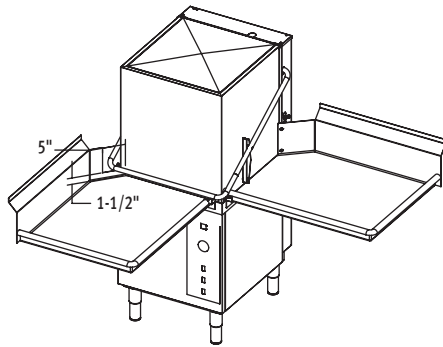

**CORNER
INSTALLATION**

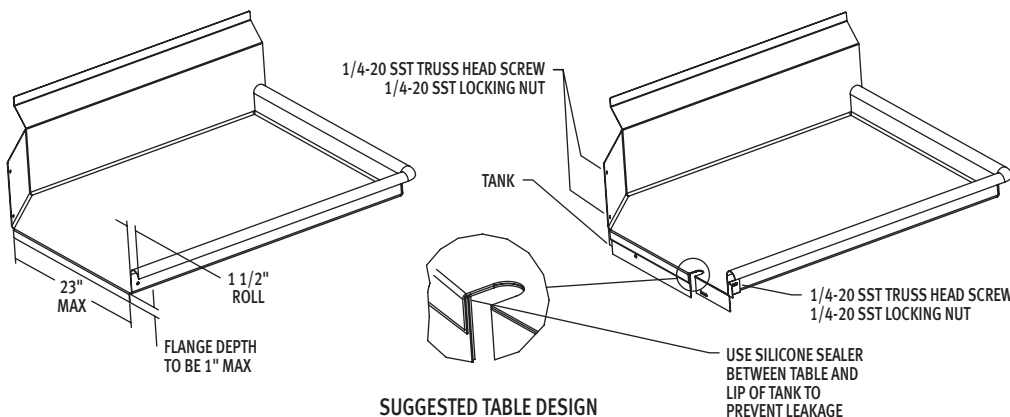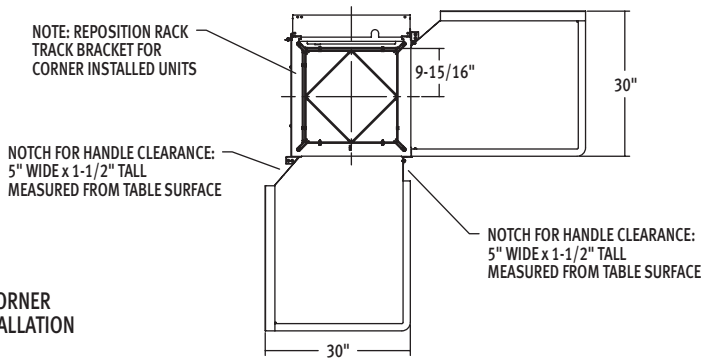

SUGGESTED TABLE DESIGN

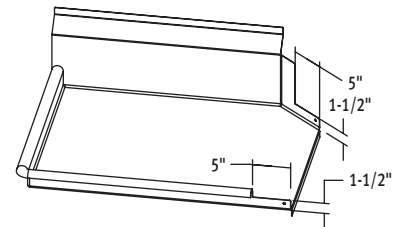

**CORNER TABLE
CUTOUTS**